



BAKE AND ROAST OVENS



JTRH-236

MODEL NO.	DESCRIPTION
<input type="checkbox"/> JTRH-36	SINGLE DECK STANDARD OVEN
<input type="checkbox"/> JTRH-36C	SINGLE DECK CONVECTION OVEN
<input type="checkbox"/> JTRH-236	DOUBLE DECK STANDARD OVEN
<input type="checkbox"/> JTRH-236C	ONE STANDARD OVEN, ONE CONVECTION OVEN
<input type="checkbox"/> JTRH-236CC	DOUBLE DECK CONVECTION OVEN

STANDARD FEATURES

- Variable size multi-point gas connection—see utility information for details
- Stainless steel front, sides and top
- 14 gauge stainless steel all welded construction
- Stainless steel oven interior (bottom and sides removable on standard oven)
- Two chrome plated oven rack (wires curled and welded around main frame with no sharp ends)
- Oven controls located in cool zone
- Stainless steel gas tubing throughout
- Stainless steel adjustable 6" legs

AVAILABLE OPTIONS

- Cap and cover manifold. Left Right

ACCESSORIES

- 6" casters, front two locking (5" diameter wheel)
- 36" flex hose with quick disconnect (3/4" connection)
- 48" flex hose with quick disconnect (3/4" connection)
- 1" gas pressure regulator (specify gas type)
- 1-1/4" gas pressure regulator (specify gas type)




WWW.JADERANGE.COM

JADE RANGE, LLC., A MIDDLEBY COMPANY • 2650 Orbiter Street • Brea, CA 92821 • PHONE: 800-884-5233 FAX: 714-961-2550
Note: In line with their policy to continually improve products, Jade reserves the right to change materials and specifications without notice. PRINTED IN USA



BAKE AND ROAST OVENS

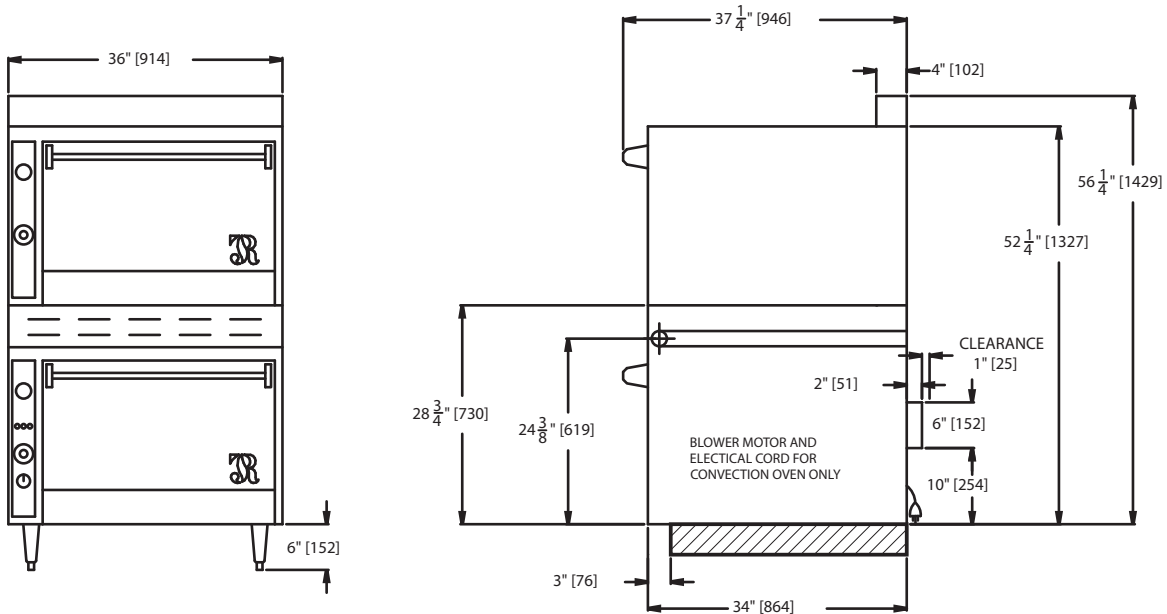

MODEL	BTUS	WIDTH	DEPTH	HEIGHT	APPX. SHP. WT.
JTRH-36	35,000	36"	34"	SEE DRAWING	475 LBS.
JTRH-36C	30,000	36"	34"	SEE DRAWING	525 LBS.
JTRH-236	70,000	36"	34"	SEE DRAWING	900 LBS.
JTRH-236C	65,000	36"	34"	SEE DRAWING	950 LBS.
JTRH-236CC	60,000	36"	34"	SEE DRAWING	1000 LBS.

DESCRIPTION:

Bake and roast ovens. To be Model #_____, manufactured by Jade Range, LLC. Standard features include variable size multi-point gas connection—see utility information for details, stainless steel front, sides and top, 14 gauge stainless steel all welded construction, stainless steel oven interior (bottom and sides removable on standard oven, two chrome plated oven rack (wires curled and welded around main frame with no sharp ends), oven controls located in cool zone, stainless steel gas tubing throughout, and stainless steel adjustable 6" legs.

SPECIFY TYPE OF GAS WHEN ORDERING.

SPECIFY ALTITUDE WHEN ABOVE 2,000 ft.

UTILITY INFORMATION - GAS:

- Ranges are supplied with 1-1/4" front manifold connection and a 1" or 3/4" capped rear manifold connection. For rear manifold connection, remove cap. Ranges are supplied with 3/4" gas pressure regulator. For 1-1/4" or 1" gas pressure regulator, see accessories. (Specify required front manifold cap and cover when ordering.)
- Required operating pressure:
Natural Gas 5" W.C. minimum
Propane Gas 10" W.C. minimum
14" W.C. maximum

Note: This unit must be connected with the gas appliance regulator supplied.

UTILITY INFORMATION - ELECTRICAL:

- Standard: 115v/60/1 (for other electrical requirements consult factory)