

"3PB-1DB" Pro-Bowl Sinks - 14 Gauge


Three Compartment Sinks w/ 1 Drainboard w/ Stainless Steel Base & Bracing



STANDARD: 14 ga. 300 S/S welded Bowls

14 ga. 300 S/S Drainboard and Splash

10" Back Splash 12" or 14" Deep Bowls



Must specify Left or Right Drainboards

Bowl Sizes:

16" X 18"	18" X 24'
16" X 20"	24" X 24"
18" X 18"	30" X 24"

OPTIONAL ACCESSORIES

	Qty
END SPLASHS, RIGHT , LEFT or BOTH	
FAUCETS	
ADD-A-FAUCETS	
PRE-RINSE UNITS	
LEVEL WASTE	
OVERSHELVES	
POT RACK	

P-15A



FEATURES:

- Standard 14 Gauge
- Type 300 stainless steel with # 4 polish, satin finish
- * 12" & 14" Deep Bowls
- * All Corners, both vertical and horizontal, coved at 5/8" radius
- * Bottoms of bowls formed for drainage to 3-1/2" diameter die stamped opening
- * Full length 10" High Boxed Backsplash, with 2" return to wall at 45 degree and 3/4" turned down rear lip
- * 1-1/8" Faucet Holes in Backsplash
- * Solid Stainless Steel front panel, type 300 stainless steel with # 4 polish, satin finish
- * All outside corners of assembly are Bullnosed to provide safe, clean and polished edge
- * Standard legs 1-5/8" diameter, 16 gauge stainless steel
- * Legs located directly under sink bowls, providing increased stability and maximum weight support
- * 36" Drainboards are standard w/ additional stainless steel legs

CONSTRUCTION:

Top: Stainless Steel Sinks are TIG welded, Exposed welds

are polished to match adjacent surface. Stainless Steel Bases, Standard K.D.

MATERIAL:

Bases:

Bowls & 14 gauge stainless Steel

Top: Type 300 stainless steel with # 4 polish, satin finish

Legs: 1 5/8" Round O.D., 16 gauge stainless steel Bracing: 1 1/4" Round O.D., 16 gauge stainless steel

Gussets: Stainless Steel

Feet: 1" adjustable stainless steel bullet feet


John Boos & Co


2601 S. Banker Street - Effingham, IL 62401 Phone: 217-347-7701 - Fax: 217-347-7705

Email: sales@johnboos.com - Web-site: www. johnboos.com


DETAILED SPECIFICATIONS

BOWLS	F	G	Н	
16 X 18	23-1/2"	18"	11-15/16"	
16 X 20	25-1/2"	20"	12-15/16"	
18 X 18	23-1/2"	18"	11-15/16"	
18 X 24	29-1/2"	24"	14-15/16"	
24 X 24	29-1/2"	24"	14-15/16"	
30 X 24	29-1/2"	24"	14-15/16"	



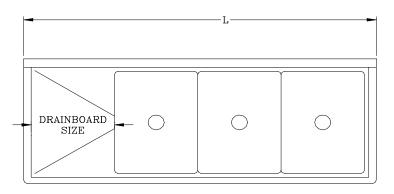

14 GAUGE * 12" DEEP				
MODEL	BOWL SIZE	DIMENSIONS	DB	WT.
43PB1618-1D18	16 X 18 X 12	70-3/16" X 23-1/2"	18"	345
43PB1618-1D24	16 X 18 X 12	76-3/16" X 23-1/2"	24"	367
43PB1618-1D30	16 X 18 X 12	82-3/16" X 23-1/2"	30"	379
43PB18-1D18	18 X 18 X 12	76-3/16" X 23-1/2"	18"	373
43PB18-1D24	18 X 18 X 12	82-3/16" X 23-1/2"	24"	384
43PB18-1D30	18 X 18 X 12	88-3/16" X 23-1/2"	30"	401
43PB1824-1D18	18 X 24 X 12	76-3/16" X 29-1/2"	18"	412
43PB1824-1D24	18 X 24 X 12	82-3-16" X 29-1/2"	24"	429
43PB1824-1D30	18 X 24 X 12	88-3/16" X 29-1/2"	30"	446
43PB24-1D24	24 X 24 X 12	100-3/16" X 29-1/2"	24"	492
43PB24-1D30	24 X 24 X 12	106-3/16" X 29-1/2"	30"	509
43PB3024-1D30	30 X 24 X 12	124-3/16" X 29-1/2"	30"	582
43PB3024-1D36	30 X 24 X 12	130-3/16" X 29-1/2"	36"	599



	12" Deep	14" Deep
Α	14"	16"
В	12"	14"
С	10"	10"
D	43"	43"

14 GAUGE * 14" DEEP				
MODEL	BOWL SIZE	DIMENSIONS	DB	WT.
43PB16184-1D18	16 X 18 X 14	70-3/16" X 23-1/2"	18"	348
43PB16184-1D24	18 X 18 X 14	76-3/16" X 23-1/2"	24"	370
43PB16184-1D30	16 X 18 X 12	82-3/16" X 23-1/2"	30"	382
43PB184-1D18	18 X 24 X 14	76-3/16" X 23-1/2"	18"	376
43PB184-1D24	24 X 24 X 14	82-3/16" X 23-1/2"	24"	387
43PB184-1D30	18 X 18 X 14	88-3/16" X 23-1/2"	30"	404
43PB18244-1D18	18 X 24 X 14	76-3/16" X 29-1/2"	18"	415
43PB18244-1D24	18 X 24 X 14	82-3-16" X 29-1/2"	24"	432
43PB18244-1D30	18 X 24 X 14	88-3/16" X 29-1/2"	30"	449
43PB244-1D24	24 X 24 X 14	100-3/16" X 29-1/2"	24"	495
43PB244-1D30	24 X 24 X 14	106-3/16" X 29-1/2"	30"	512
43PB30244-1D30	30 X 24 X 14	124-3/16" X 29-1/2"	30"	585
43PB30244-1D36	30 X 24 X 14	130-3/16" X 29-1/2"	36"	602

All dimensions are typical.

Tolerance +/- .500".

All units ship unassembled for reduced shipping cost.

John Boos & Co

3601 S. Banker Str - Effingham, IL 62401 Phone: 217-347-7701 - Fax: 217-347-7705 Email: sales@johnboos.com - Web-site: www.johnboos.com



July 2013

John Boos is constantly engaged in a program of improving products and therefore reserves the right to change specification without prior notice