

"GS6-" Equipment Stands

w/ 16 Gauge Stainless Steel Work Top w/ Stainless Steel Base



FEATURES:

- * 16 Gauge Stainless Steel Top
- Type 300 stainless steel with # 3 polish, satin finish
- * 1-1/2" turned up Back and Both Ends, w/ 7/8" radius front edge
- * Top is reinforced by a full frame fabricated of 1-1/2" square O.D. tube 16 gauge pre-galvanized steel.
- * Stainless Steel Base and Bracing and or Shelf
- * Bracing or Shelve adjustable to desired height
- * Adjustable bullet feet
- * Shipped knocked-down, easy to assemble
- * All models are approved by the National Sanitation Foundation and



16 GAUGE TOP w/ STAINLESS STEEL BASE

| Without Lower Shelf | | | | | | | | |
|---------------------|-----|-------------|-----|-------------|-----|--|--|--|
| 24"WIDE | Qty | 30"WIDE | Qty | 36"WIDE | Qty | | | |
| GS6-2436SBK | | GS6-3036SBK | | - | | | | |
| GS6-2448SBK | | GS6-3048SBK | | GS6-3648SBK | | | | |
| GS6-2460SBK | | GS6-3060SBK | | GS6-3660SBK | | | | |
| GS6-2472SBK | | GS6-3072SBK | | GS6-3672SBK | | | | |
| With Lower Shelf | | | | | | | | |
| GS6-2436SSK | | GS6-3036SSK | | - | | | | |
| GS6-2448SSK | | GS6-3048SSK | | GS6-3648SSK | | | | |
| GS6-2460SSK | | GS6-3060SSK | | GS6-3660SSK | | | | |
| GS6-2472SSK | | GS6-3072SSK | | GS6-3672SSK | | | | |



CONSTRUCTION:

- Top: Stainless Steel Tops are TIG welded, Exposed welds are polished to match adjacent surface.
- Base: Stainless Steel frame is MIG welded

MATERIAL:

Top:16 gauge Stainless Steel
Type 300 stainless steel with # 4 polish, satin finishBracing:1 1/4" Round O.D. 18 gauge tubular stainless steelShelf:18 gauge Stainless Steel SteelLegs:1 5/8" Round O.D., 16 gauge tubular galvanized steelGussets:Stainless Steel

Feet: 1" adjustable galvanized bullet feet


OPTIONAL ACCESSORIES

| | MODEL # | Qty |
|----------------------|---------|-----|
| MAPLE CUTTING BOARDS | | |
| WELDED SET-UP | | |

John Boos & Co

315 South First Street - Effingham, IL 62401 Phone: 217-347-7701 - Fax: 217-347-7705 Email: sales@johnboos.com - Web-site: www. johnboos.com

DETAILED SPECIFICATIONS

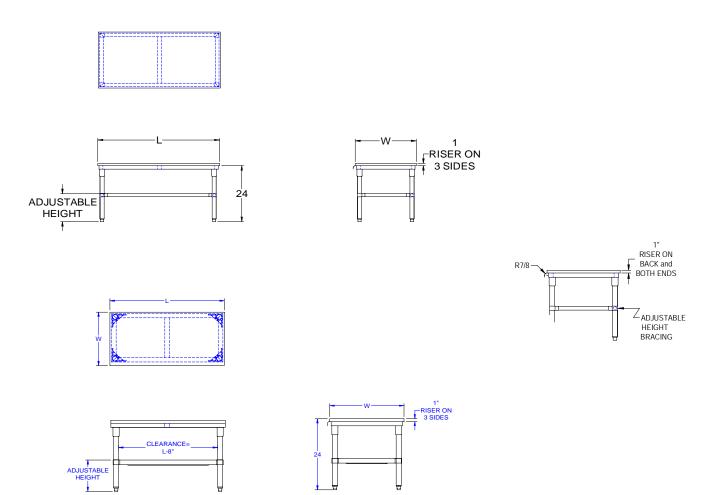

All units ship unassembled for reduced shipping cost. All dimensions are typical. Tolerance +/- .500".

16 GAUGE TOP & BRACING

| Without Lower Shelf | | | | | | | | | |
|---------------------|-------------|-----|-------------|-----|-------------|-----|--|--|--|
| L | 24" WIDE | WT. | 30" WIDE | WT. | 36" WIDE | WT. | | | |
| 36 | GS6-2436SBK | 65 | GS6-3036SBK | 69 | - | - | | | |
| 48 | GS6-2448SBK | 80 | GS6-3048SBK | 90 | GS6-3648SBK | 100 | | | |
| 60 | GS6-2460SBK | 95 | GS6-3060SBK | 111 | GS6-3660SBK | 127 | | | |
| 72 | GS6-2472SBK | 111 | GS6-3072SBK | 132 | GS6-3672SBK | 154 | | | |
| With Lower Shelf | | | | | | | | | |
| 36 | GS6-2436SSK | 75 | GS6-3036SSK | 75 | - | - | | | |
| 48 | GS6-2448SSK | 90 | GS6-3048SSK | 100 | GS6-3648SSK | 110 | | | |
| 60 | GS6-2460SSK | 115 | GS6-3060SSK | 131 | GS6-3660SSK | 147 | | | |
| 72 | GS6-2472SSK | 141 | GS6-3072SSK | 162 | GS6-3672SSK | 184 | | | |

John BOOS Since 1887

John Boos & Co 315 South First - Effingham, IL 62401 Phone: 217-347-7701 - Fax: 217-347-7705 Email: sales@johnboos.com - Web-site: www.johnboos.com

November 2010

John Boos is constantly engaged in a program of improving products and therefore reserves the right to change specification without prior notice