



# "S16MS" Machine Stands

w/ 16 Gauge Stainless Steel Work Top  
w/ Galvanized Base




### 16 GAUGE TOP w/ GALVANIZED BASE

20"WIDE	Qty	24"WIDE	Qty	30"WIDE	Qty
S16MS01		S16MS02		S16MS05	
S16MS03		S16MS04			

### FEATURES:

- \* 16 Gauge Stainless Steel Top  
Type 300 stainless steel with # 3 polish, satin finish
- \* Reinforced with 1"x2" channel running entire length of table
- \* Galvanized Base and Bracing  
100% pre-galvanized steel - **Not Plated**
- \* Bracing adjustable to desired height
- \* Adjustable bullet feet
- \* Shipped knocked-down, easy - to - assemble
- \* All models are approved by the National Sanitation Foundation and the U.S. Department of Agriculture.

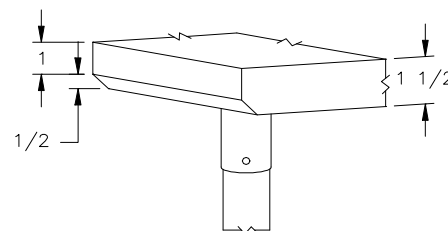

STALLION  
SAFETY  
EDGE

### CONSTRUCTION:

Top: Stainless Steel Tops are TIG welded, Exposed welds are polished to match adjacent surface.  
Base: Galvanized frame is MIG welded

### MATERIAL:

Top: 16 gauge Stainless Steel  
Type 300 stainless steel with # 3 polish, satin finish  
Bracing: 1 1/4" Round O.D. 18 gauge tubular galvanized steel  
100% pre-galvanized steel - **Not Plated**  
Legs: 1 5/8" Round O.D., 16 gauge tubular galvanized steel  
100% pre-galvanized steel - **Not Plated**  
Gussets: Galvanized Steel  
Feet: 1" adjustable galvanized bullet feet




### OPTIONAL ACCESSORIES

	MODEL #	Qty
WELDED SET-UP		

## John Boos & Co

315 South First Street - Effingham, IL 62401  
Phone: 217-347-7701 - Fax: 217-347-7705  
Email: sales@johnboos.com - Web-site: www.johnboos.com

## DETAILED SPECIFICATIONS

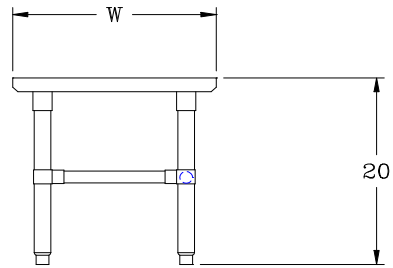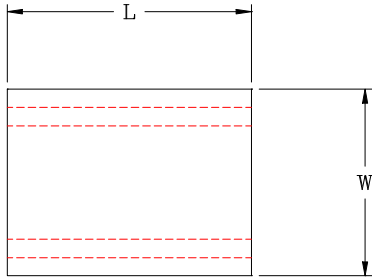

All units ship unassembled for reduced shipping cost.  
 All dimensions are typical.  
 Tolerance +/- .500".

### 16 GAUGE TOP & BRACING

L	20" WIDE	WT.	24" WIDE	WT.	30" WIDE	WT.
24	S16MS01	31	S16MS02	33	S16MS05	42
30	S16MS03	35	S16MS04	38		

### John Boos & Co

315 South First - Effingham, IL 62401 Phone: 217-347-7701 - Fax: 217-347-7705  
 Email: sales@johnboos.com - Web-site: www.johnboos.com



May 2002

**John Boos** is constantly engaged in a program of improving products and therefore reserves the right to change specification without prior notice