

ROYAL SERIES PLUMBING ELECTRONIC FAUCETS

MODEL:		PROJECT:	ITEM #:	QTY:
--------	--	----------	---------	------

PRODUCT IMAGE



16-190 SHOWN

THIS PRODUCT DOES NOT REQUIRE LOW LEAD COMPLIANCE

STANDARD FEATURES

- Single hole wall mount chrome plated faucet
- Infrared sensor turns water on and off for hands free, fast and safe operation
- Operates on battery (included) or power supply (optional)
- Battery life: 1-3 years (based on usage)
- Built-in low battery indicator light
- Ideal for all hand sinks, hospitals, scrub sinks, lavatories and food establishments
- Ideal for retro-fit, easy installation
- Operating temperature: 40 140°F
- Operating pressure: 5 125 psi
- 3/8" compression female inlet
- Vandal resistant housing hardware
- Built-in check valve with cleanable filter included
- 30 second timeout feature
- 1 1/4" mounting hole required

SPECIFICATIONS

Single-hole wall mount, non-mixing, automatic, lavatory faucet with chrome plated, solid, all metal construction. Included faucet, sensor assembly, 6V DC slow-closing solenoid valve, optional plug-in power adapter, armored/vandal resistant faucet input power cable, one (1) 3/8" braided S.S. supply line, one (1) in-line filter, 0.5 GPM vandal resistant aerator and all necessary faucet mounting hardware. Features include: All valve components (sensor connector, control module (PCB) and solenoid valve) are housed in an sealed, vandal resistant, nonmetallic box for easy access and quick installation.

OPTIONS

- AC Adapter Model # 16-199
 - AC Adapter Input: 120VAC 50/60 Hz input-7.5VDC
 - AC Adapter Output: 12 VDC 800mA
 - 038 A/Class 2 UL/CSA transformer



APPROVED BY:

Due to our commitment to continued product improvement, specifications are subject to change without notice.



ROYAL SERIES PLUMBING ELECTRONIC FAUCETS


MODEL:	PROJECT:	_ ITEM #:	QTY:
	_ 1 1100E011		_

MODELS

Model Numbers	Spout Size	Depth (Front to Back) (A)	Height (Mounting Center to Spout Tip) ®	Overall Height	Weight (lbs.)
16-190	3" Gooseneck	4 9/16"	6 1/4"	8 15/16"	7
16-191	6" Gooseneck	6 3/4"	6 15/16"	10 3/4"	7
16-192	6" Spout with Adapter	7 1/2"	3 1/8"	5 ³ / ₈ "	7

Optional Accessory: 16-199 AC Adapter

DRAWING

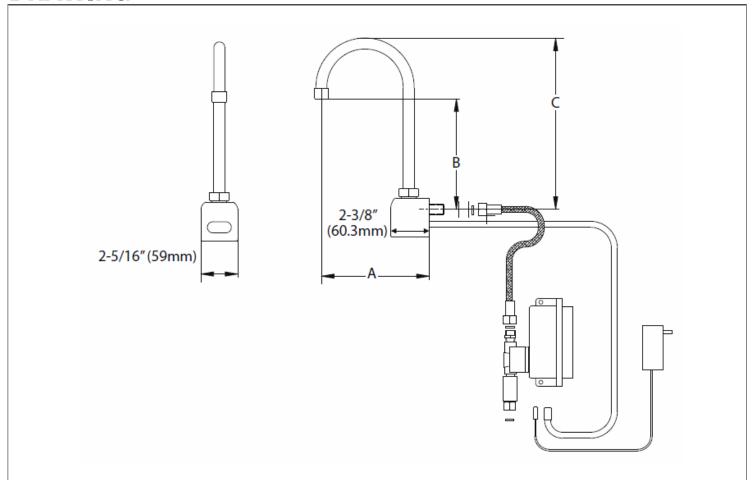



APPROVED BY:

Due to our commitment to continued product improvement, specifications are subject to change without notice.