Item #

Spec.


Enclosed Utility Cabinets

Stainless Steel Sheet Pan and Universal Angle Models




All Purpose Transport and Storage

- Durable welded stainless steel construction.
- Single door and double dutch door versions are available.
- Built tough to withstand the demands of heavy utility transport operations.
- Lift-off door.
- Recessed hand grips.
- Adjustable tray slides on universal models.
- NSF listed.



Adjustable Tray Slides



Sheet Pan Tray Slides


General Specifications

Shall be of stainless steel construction. Universal models hold $20" \times 22"$ (510 x 560 mm), $18" \times 26"$ (457 x 660 mm) and $14" \times 18"$ (356 x 457 mm) pans and trays. Sheet Pans models hold $18" \times 26"$ (457 x 660 mm) pans and trays. Welded tubular base frame shall be 1" square, heavy gauge stainless steel tubing, with 10-gauge stainless steel reinforcing plates at corners. High density fiberglass insulated door. Door shall be attached to cabinet with heavy-duty lift-off hinges, which provide for 270° swing and be held open by magnetic door latch. Each door has paddle latch. Cabinet has recessed handles. Bottom corner bumpers shall be standard. Polyurethane tire casters in a configuration of two (2) rigid, and two (2) swivel with brake. Casters shall have a reinforced yoke welded to 10-gauge caster mounting plate. The caster mounting plate shall be secured to a 10-gauge stainless steel reinforcing stress plate via welded in place stainless steel studs. The reinforcing stress plates shall be welded to the heavy gauge tubular frame of the unit.



Enclosed Utility Cabinets

Stainless Steel Sheet Pan and Universal Angle Models

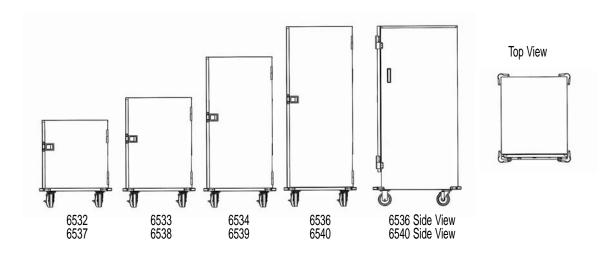

Dimensions

Sheet Pan (18" x 26") Models

Models	Pan Ca Full Size	pacity Half Size	Slide Spacing	Door Type	W O	verall S D	ize H (A)	Case Lbs.	Weight (kg)
6532	7	14	3" (76)	Single	25.5" (648	34" 864	32" 813)	125	(57)
6533	11	22	3" (76)	Single	25.5" (648	34" 864	45" 1143)	165	(75)
6534	16	32	3" (76)	Single	25.5" (648	34" 864	60" 1524)	205	(93)
6536	19	38	3" (76)	Single	25.5" (648	34" 864	69" 1753)	230	(104)

Options

- Full Perimeter Bumper
- All Swivel Lake-Glide Casters
- Floor Lock Centered (6" Casters)
- Additional Tray Slides (Pair)
- Transport Latch
- Magnetic Latch (per door)
- Dutch Doors
- Clear Polycarbonate Door Panel
- Vented Doors (single door models)
- Left-Hand Door Hinging
- Transport Package

Universal Angle Models

	Pan Capacity		Slide Door		Overall Size			Case Weight	
Models	Full Size	Half Size	Spacing	Type	W	D	H (A)	Lbs.	(kg)
6537	5	10	4.5" (114)	Single	28" (711	34" 864	33" 838)	140	(59)
6538	7	14	4.5" (114)	Single	28" (711	34" 864	42" 1067)	150	(77)
6539	11	22	4.5" (114)	Single	28" (711	34" 864	60" 1524)	215	(104)
6540	13	26	4.5" (114)	Single	28" (711	34" 864	69" 1753)	255	(114)

Measurements in () denote metric millimeters, unless otherwise specified.

Universal Ledges Accommodate The Following Per Slide:

1 ea. 18" x 26" Pan 1 ea. 15" x 20" Tray 1 ea. 16" x 22" Tray 1 ea. 20" x 22" Pan 2 ea. 14" x 18" Pan 2 ea. 13" x 18" Pan 2 ea. 12" x 20" Pan (3" Deep)		•
	1 ea. 1 ea. 1 ea.	15" x 20" Tray 16" x 22" Tray 20" x 22" Pan
	2 ea.	13" x 18" Pan





Lakeside Manufacturing, Inc.

4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A. 800-558-8565 • 414-902-6400 • Fax 414-902-6446 • www.eLakeside.com