


# Open Pan & Tray Racks

## Aluminum



Model 8528

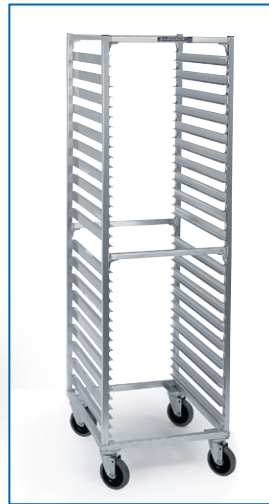

Model 8559

### Durable, efficient storage system with all-welded aluminum construction

#### Benefits

- Light-weight aluminum is rust-proof
- Welded construction

#### Features

- Channel and angle style ledges are continuously welded to the uprights to withstand rugged use.
- Reinforced bottom design provides added durability during offsite transport.
- Accommodates 18" x 26" or 14" x 18" pans and trays.
- NSF listed.

#### Casters

- Heavy-duty 5" plate-mount with non-marking poly wheels



#### Specifications:

Shall be constructed of hi-tensile, corrosion-resistant, rust proof, primary extruded aluminum, Type 6463-T5 alloy. All seams shall be heli-arc welded and sealed (no rivets). Tray ledges 1-1/4" x 1-5/8" x .100 extruded aluminum welded to frame on 3" or 5" centers, with channel type ledges to be on 11 1/2" centers. Unit shall have four horizontal supports located at the top and center of 1" x 1" x .070 wall aluminum tube. Corner gussets of 1-1/2" x 1-1/2" x 5/8" thick angle shall be welded to the inside angles (bottom side) where horizontal cross bracing meets vertical uprights with a 4 1/2" continuous weld. Unit base shall be constructed of 1" x 1" x .070 wall tube welded into a rectangular frame (20-1/2" x 26"), with two extra laterals where caster mount reinforcement plates shall be inset. reinforcement caster plates (2-3/4" x 4" x 3/8"), pre-tapped for 1/4" bolts, shall be welded to this frame. Casters shall be plate mount type, with 5" diameter non-marking polyurethane wheel, full swivel design with sealed ball bearing races.

Spec. # \_\_\_\_\_


AIA # \_\_\_\_\_

# Open Pan & Tray Racks

## Aluminum

Spec. # \_\_\_\_\_

AIA # \_\_\_\_\_

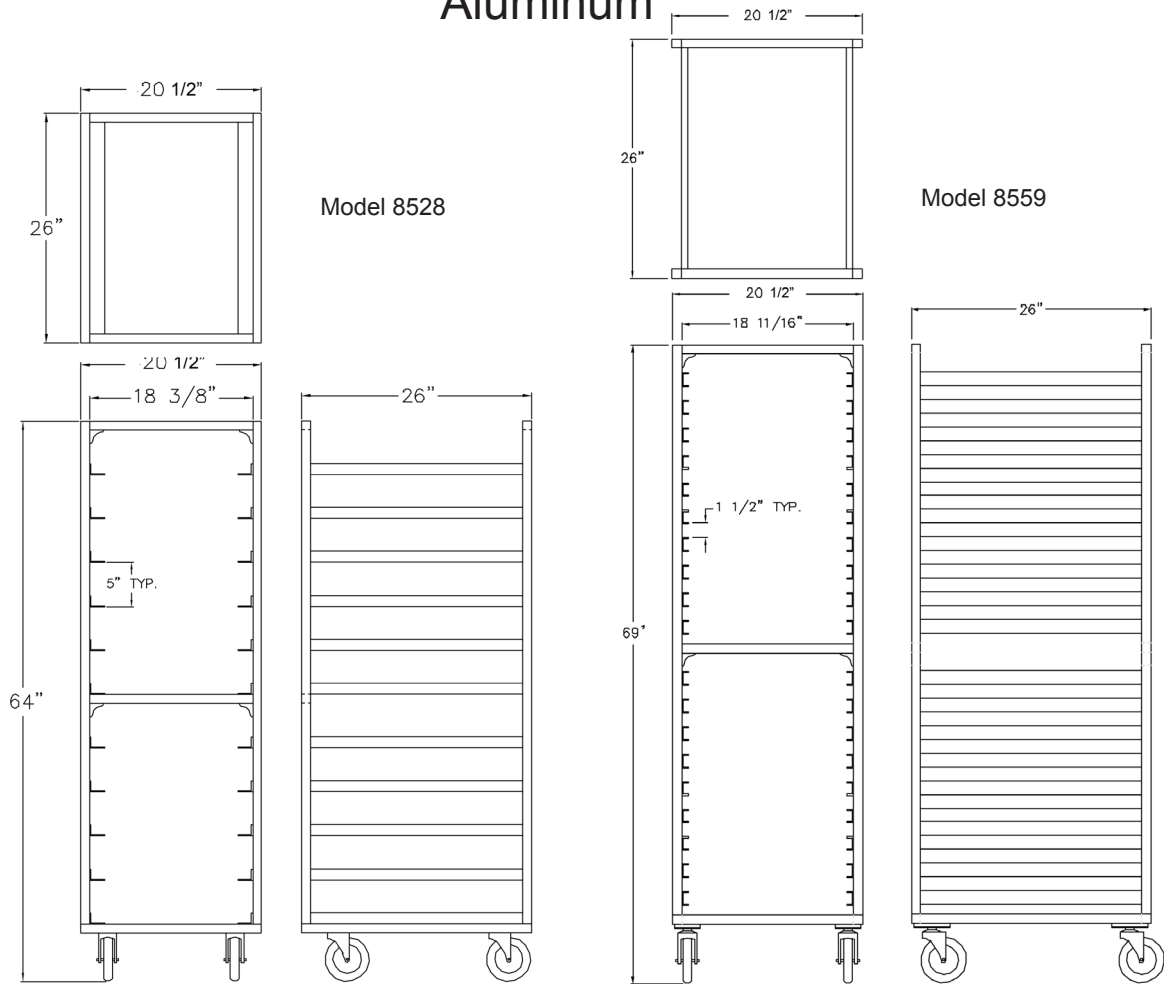

### Dimensions:

Model	Pan/Tray Capacity		Ledge		Overall Size			Case Wt.
	Full Size	Half Size	Type	Spacing	W	L	H	Lbs.
8522	18	36	Angle	3" (76)	20½" (521)	26" 660	63" 1600)	42 (18.9 kg)
8528	11	22	Angle	5" (127)	20½" (521)	26" 660	64" 1626)	38 (17.1 kg)
8529	18	36	Angle	3" (76)	20½" (521)	26" 660	64" 1626)	48 (21.6 kg)
8547	34	68	Channel	1½" (38)	20½" (521)	26" 660	64" 1626)	53 (23.9 kg)
8559	38	76	Channel	1½" (38)	20½" (521)	26" 660	69" 1753)	56 (25.2 kg)

*Dimensions in ( ) denote metric millimeters, unless otherwise noted.*

### Options:

- Break casters (set of 2)
- Perimeter bumper
- Vertical leg bumpers (set of 4)
- Pan stop
- Bottom corner bumpers (set of 4)
- Solid sheet base



Lakeside Manufacturing, Inc.  
 4900 West Electric Avenue • West Milwaukee, WI 53219 U.S.A.  
 800-558-8565 • 414-902-6400 • Fax 414-902-6446 • www.eLakeside.com