

Utility Carts

Tough Transport®

Features

- 1000 lb. (450 kg) Capacity
- Rugged “U” shaped frame with angled stainless steel for added strength. All joints are continuous heliarc welded.
- Shelves are 14 gauge stainless steel with reinforced edges.
- Stainless steel construction resists staining and rusting.
- Steam clean or wipe down.
- Sanitizes easily.



Model 954



Specifications

Unit shall be of fully welded stainless steel construction. Legs and frame shall be of U-frame design, eliminating the need for corner reinforcements. Shelves shall be of 14-gauge stainless steel, and shall be continuously TIG welded to vertical leg frames. Shelves shall be reinforced front and back with 18-gauge angle welded to the shelf underside. Unit shall have two each 5" diameter extra-load swivel casters with 1-1/4" wide non-marking polyurethane wheels, and 2 each 8" diameter extra-load wheels mounted to a fixed axle. Swivel casters shall be plate type and shall be bolted to an 18-gauge 5" wide stainless steel cross member with a galvanized reinforcement. Unit shall have push handle made of 18 gauge 1" O.D stainless steel tubing. Handle mounting brackets shall be continuously TIG welded to vertical leg frame. Unit shall have two each bumpers mounted to handle ends and two each 6" bumpers riveted to front legs. Unit shall be NSF listed.

OPTIONAL ACCESSORIES


- Extended perimeter bumper
- All 5" swivel casters
- Set of 2 each 5" brake casters
- Ground and polished joint welds

Lakeside Manufacturing, Inc.
1977 South Allis Street • Milwaukee, WI 53207-1295 U.S.A.
800-558-8565 • 414-481-3900 • Fax 414-481-9313 • www.eLakeside.com



Utility Carts

Tough Transport®

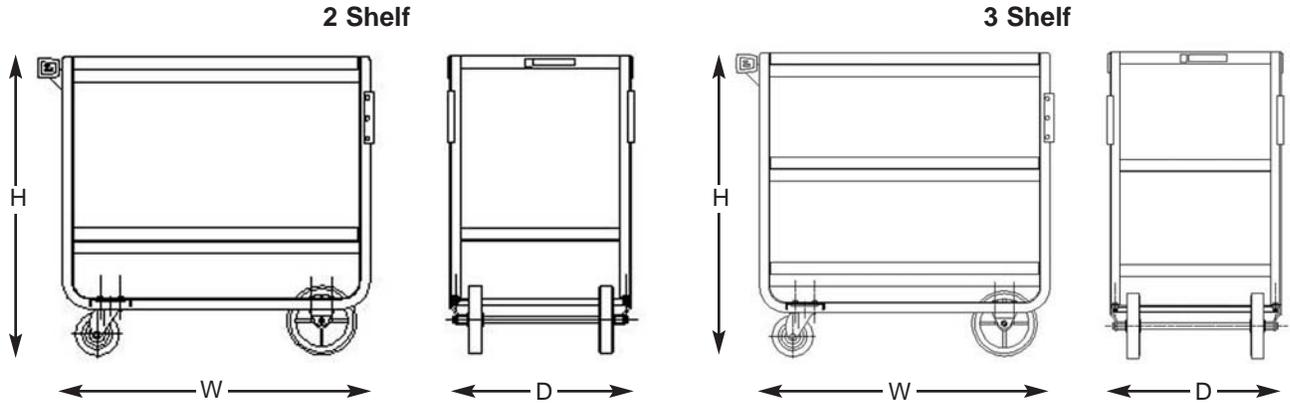

AutoCAD drawings available through KCL CADalag

Dimensions

Model	Shelf Description			Overall Size			Case Weight		Case Cube	
	# of	Shelves	Clearance	W	D	H	Lbs.	(Kg)	Cu. ft.	(m ³)
938	2	18" x 27" (457 x 686)	19" (483)	33" (838)	19-3/4" (502)	34-1/4" (870)	66	(29.9)	14	(.39)
939	3	18" x 27" (457 x 686)	10" (254)	33" (838)	19-3/4" (502)	34-1/4" (870)	80	(36.3)	14	(.39)
943	2	21" x 33" (533 x 838)	21" (533)	39" (991)	22-3/4" (578)	37-3/8" (949)	88	(39.9)	20.8	(.58)
944	3	21" x 33" (533 x 838)	11-3/8" (289)	39" (991)	22-3/4" (578)	37-3/8" (949)	106	(48.1)	20.8	(.58)
947	2	24" x 36" (610 x 914)	21" (533)	42" (1067)	25-7/8" (657)	37-3/8" (949)	106	(48.1)	31.1	(.87)
949	3	24" x 36" (610 x 914)	11-3/8" (289)	42" (1067)	25-7/8" (657)	37-3/8" (949)	130	(59)	31.1	(.87)
953	2	24" x 42" (610 x 914)	21" (533)	48" (1219)	25-3/4" (654)	37-3/8" (949)	126	(57.1)	31.1	(.87)
954	3	24" x 42" (610 x 1067)	11-3/8" (289)	48" (1219)	25-3/4" (654)	37-3/8" (949)	152	(69)	31.1	(.87)
958	2	21" x 49" (533 x 1245)	21" (533)	55" (1397)	22-3/4" (578)	37" (940)	123	(55.8)	32.3	(.90)
959	3	21" x 49" (533 x 1245)	11-3/8" (289)	55" (1397)	22-3/4" (578)	37" (940)	150	(68)	32.3	(.90)

Measurements in () denote metric millimeters, unless otherwise specified.

AIA #

Spec. #



Lakeside Manufacturing, Inc.

1977 South Allis Street • Milwaukee, WI 53207-1295 U.S.A.
800-558-8565 • 414-481-3900 • Fax 414-481-9313 • www.eLakeside.com