

Item No.	
Project	
Quantity	

Gas, Cheesemelter



Model 248CMW shown

SIZING AND PERFORMANCE GUIDE

Model	Width	Burners	BTU Input*
236	36"	1	30,000
248	48"	2	40,000

* For both natural and propane gas

SHORT/BID SPECIFICATION

Cheesemelter shall be a LANG Manufacturing Model 2-__ [specify width: -36 (36") or -48 (48") ___ [specify style: -CM Counter or -CMW Wall Mount; with gas heated infrared burner system, with 10,000 BTU/hr per-foot power input and grease-free combustion air design; Weight-of-Plate instant ON/OFF; large, unrestricted plate opening; four position adjustable plate rack; and all the

features listed and the options/accessories checked:

STANDARD PRODUCT WARRANTY

One year, parts & labor

Model: 236,248[CM,CMW]

CONSTRUCTION FEATURES

- · Stainless steel front, top & sides, with aluminized steel back
- Top mounted gas infrared heaters
- Four position, adjustable chrome plated plate rack
- Stainless steel bottom drip tray
- 4" adjustable legs provided with [-CM] Counter Model only
- Wall mounting brackets included with Wall-Mount [-CMW] Models

PERFORMANCE FEATURES

- Weight-of-Plate instant-on/off saves time and energy
- · Weight-of-Plate instant-on eliminates pre-heating
- Efficient infrared burners deliver 1650°F heat in 10 seconds
- · Grease-free combustion air design for long life & easier cleaning
- · Large, unrestricted opening for quick and easy access

CONTROL PACKAGE

- · Weight-of-Plate automatic burner ON-OFF
- Control System-ON switch



Sheet No. LSP-CM1 (rev. 6/07)

LANG MANUFACTURING - A DIVISION OF STAR MANUFACTURING INT'L, INC. • 10 SUNNEN DR. ST. LOUIS, MO 63143 TOLL FREE: 800.264-7827 • FAX: 314-781-3636 • www.langworld.com

INSTALLATION REQUIREMENTS


- Specify: 🗋 natural gas or 🗋 propane gas: ⑥ via 1/2" NPT connection
- Gas pressure regulator provided
- · Specify elevation if project is over 2000 feet.
- (E) 115V, 1-Phase, 50/60 Hz electrical connection
- Installation under approved vent hood required.

OPTIONS & ACCESSORIES -

□ Extra chrome plated racks [specify size: 36" etc.]

- Heat shield required when mounting over heat source & shipped with [–W] Wall-Mounted Models
- · Unit not to be installed over charbroiler
- [All connections from rear. See below for location and delivery requirements]

U Wall Mount Conversion Kit [To hang a counter model]

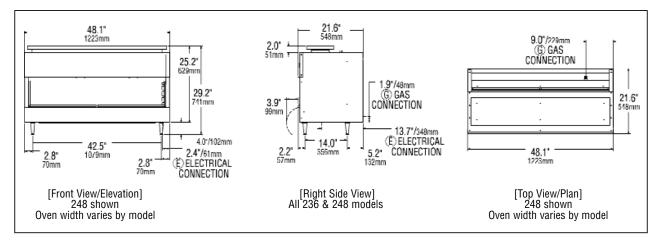

Model	Height x Width x Depth	Clearance from combustible surface	Weight		Freight Class
	(Not including legs)		Actual	Shipping	Class
236	25.2" x 36.0" x 21.6"	Sides: 6"	172 lbs.	230 lbs.	70
230	639mm x 914mm x 548mm	Back: 0"	78 kg	105 kg	70
248	25.2" x 48.0" x 21.6"	Bottom: 4"	232 lbs.	290 lbs.	70
240	639mm x 1219mm x 548mm		105 kg	132 kg	,0

Model	E Electrical Requirements				(G) Gas Requirements
Model	Voltage	Total kW	Phase	Amps/Line	(1/2" NPT)
236	115V/60Hz	0.5	4	2.0	30,000 BTU/hr
248	1137/0002	0.5	Ι	2.0	40,000 BTU/hr

CAD SYMBOLS & PRICING



Due to continuous improvements, specifications subject to change without notice.



Sheet No. LSP-CM1 (rev. 6/07)

LANG MANUFACTURING - A DIVISION OF STAR MANUFACTURING INT'L, INC. • 10 SUNNEN DR. ST. LOUIS, MO 63143 TOLL FREE: 800.264-7827 • FAX: 314-781-3636 • www.langworld.com