



## DOMC-A SERIES

### Dual Access Milk Coolers

#### MODELS

- DOMC-084-A
- DOMC-124-A
- DOMC-164-A

DOMC-124-A  
 (stainless steel finish option shown)

### FEATURES

#### CONSTRUCTION

- White enamel painted smooth steel exterior
- Galvanized steel interior including door interior
- Dual access to allow serving of two feeding lines
- Four 4" easy-roll swivel casters (two locking)
- Epoxy-coated heavy-duty floor racks
- NSF-listed floor drain
- NSF-listed thermometer
- 2" thick foamed-in-place polyurethane insulation
- Doors and cabinet top foamed-in-place with polyurethane insulation

#### DOORS

- Self service doors with stainless steel exterior

- Fold-back, insulated doors equipped with locks, gaskets and stainless steel hinges
- Designed to be easily opened by children for self-service
- Hold-open feature secures door during serving

#### REFRIGERATION

- Self-contained bottom mounted system with air-cooled condensing unit
- Powerful, large-capacity system allows cooler to quickly pull product down to storage temperature and maintain it
- Cold wall evaporator with no moving parts which allows more storage space
- Refrigerant: R-134a
- Operating temperature: 38°F (3°C)

#### WARRANTY

- **Standard limited three year parts and labor**
- **Additional two year coverage on compressor part**

### OPTIONS

- Add "SS" for stainless steel interior and exterior
- Laminate for top, front, sides and back
- Corner bumpers

### CAPACITY

MODEL	CASES WITH CARTONS				LOOSE CARTON (WITHOUT CASES)			
	13" x 13" x 11"H		19" x 13" x 11"H		FLAT TOP		PEAKED TOP (GABLE)	
	CASES	CARTONS	CASES	CARTONS	1/2 PINT	1 PINT	1/2 PINT	1 PINT
DOMC-084-A	8	352	4	288	864	432	680	430
DOMC-124-A	12	528	8	576	1368	684	1020	645
DOMC-164-A	16	704	12	864	1800	900	1360	860




# DOMC-A SERIES DUAL ACCESS MILK COOLERS


## TECHNICAL SPECIFICATIONS

MODEL	DIMENSIONS (in.)			DIMENSIONS (mm)			VOLTS	AMPS	UNIT H.P.	NO. OF FLOOR RACKS	CAP. CU. FT.	SHIP WT. LB/KG
	L*	D	H*	L*	D	H*						
DOMC-084-A	34 <sup>5</sup> / <sub>8</sub>	33 <sup>1</sup> / <sub>2</sub>	42 <sup>3</sup> / <sub>4</sub>	879	851	1086	115	3.3	1/5	2	12.2	326/148
DOMC-124-A	48 <sup>5</sup> / <sub>8</sub>	33 <sup>1</sup> / <sub>2</sub>	42 <sup>3</sup> / <sub>4</sub>	1235	851	1086	115	3.3	1/5	3	17.8	352/160
DOMC-164-A	62 <sup>5</sup> / <sub>8</sub>	33 <sup>1</sup> / <sub>2</sub>	42 <sup>3</sup> / <sub>4</sub>	1591	851	1086	115	3.4	1/5	4	23.5	484/220


\*Length includes door hinges. Height includes casters.

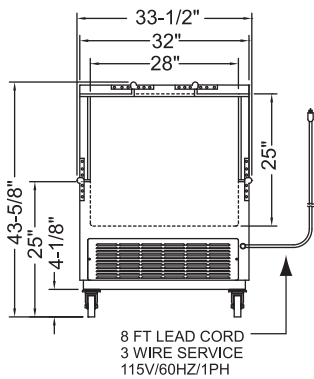


SIDE VIEW – ALL



DOMC-084-A  
ELEVATION VIEW



DOMC-124-A  
ELEVATION VIEW

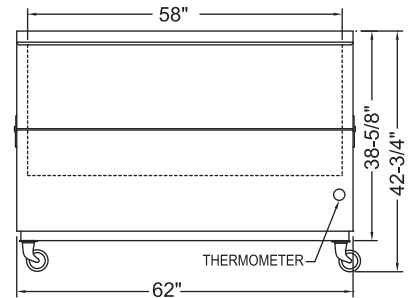

DOMC-164-A  
ELEVATION VIEW

## LISTINGS



## HOOKUP

Via plug in, 8 foot long flexible three wire 16 gauge cord with molded plug.



## BID SPECIFICATIONS

Item no. DOMC- \_\_\_\_\_-A  
Provide \_\_\_\_\_ ( ) Dual Access Milk Cooler(s), Master-Bilt model no. DOMC- \_\_\_\_\_-A.

Milk cooler will be a dual access type and will be constructed of white painted steel on the exterior with galvanized steel interior. Doors to be stainless steel on the exterior with galvanized steel interior. Doors will also be locking and fold-back

type. In addition, door will be equipped with gaskets, stainless steel hinges and a hold-open feature to secure during serving.

Cooler to be provided with four swivel casters (two locking) and an NSF-listed floor drain and thermometer. Additionally, cooler will contain heavy-duty epoxy-coated floor racks. Cabinet insulation will consist of 2" thick foamed-in-place polyurethane.

The refrigeration system will be self-contained, bottom mounted with a cold wall evaporator. System will contain R-134A refrigerant. The operating temperature will be 38°F (3°C).

Cooler to have standard limited three year parts and labor with an additional two year coverage on compressor part.

Cooler to be UL and C-UL listed as well as UL EPH classified.

**NOTE:** Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity. All specifications subject to change without notice.



908 Highway 15 North • New Albany, MS 38652  
PHONE: 800-647-1284 or 662-534-9061 • FAX: 800-232-3966 or 662-534-6049 • www.master-bilt.com

