



EM NO		
OJECT		
CATION		
ATE	QTY	

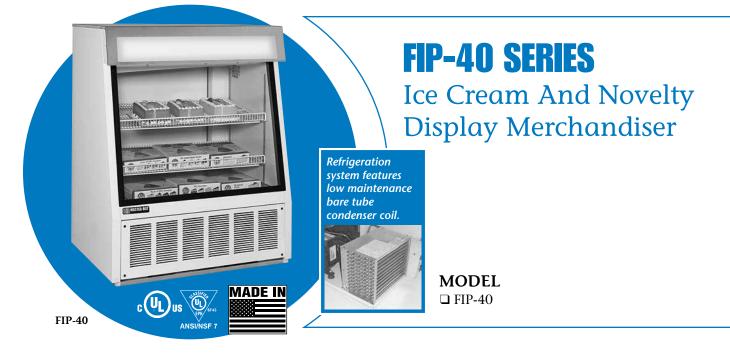

FEATURES

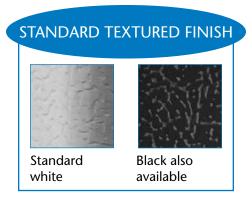

CONSTRUCTION

- Standard electronic controller with these features:
- Ability to monitor defrost functions from the front panel interface
- Audible alarm
- Eliminates room thermostat, defrost termination/fan delay control, defrost timer and digital thermometer or other temperature indicator
- 24 gauge steel interior and exterior

- Equipped with leveling legs to correct for unlevel flooring situations
- Stainless steel top serving deck
- Extra large, non-fogging front display window
- Four panes of tempered glass on front
- Backlit sign in stainless steel frame
- Two adjustable heavy-duty, white epoxy-coated, welded wire shelves
- Full length fluorescent lamp
- Automatic condensate evaporator
- Independent on/off light switch
- 2" foamed-in-place "zero ODP" urethane insulation

DOORS

- Replaceable magnetic door gasket
- Foamed-in-place reversible rear door
- Self-closing

REFRIGERATION

• Self-contained, hermetic condensing unit

- Automatic defrost
- Refrigerant: R-404A
- No minimum clearance required on cabinet sides but front, back and top must be left open for customer and operator access
- Temperature range: 0° to -20°F (-18° to -29°C)
- R-factor (insulation efficiency rating): 17.24

WARRANTY

- Standard limited two year parts and labor
- Additional three year coverage on compressor part

_	_		
\cap	PT	\mathbf{I}	NIC S
		IU	N'D'
	_	_	

Custom colors
Extra shelf
Casters






FIP-40 SERIES

ICE CREAM AND NOVELTY DISPLAY MERCHANDISER

TECHNICAL SPECIFICATIONS

	DIMENSIONS (in.)			ENSI (mm)						STANDARD SHELF	DISPLAY			SHIP	
									UNIT		SIZE	AREA	CAP.	SHIP	WT.
MODEL	L	D	Н	L	D	Н	VOLTS	AMPS	H.P.	SHELVES	(in inches)	SQ. FT.	CU. FT.	CU. FT.	(LB/KG)
FIP-40	40	31	503/16	1016	787	1270	115	13.6	3/4	2	19 x 35 ¹ / ₄	7.5	11.8	46.4	427/194

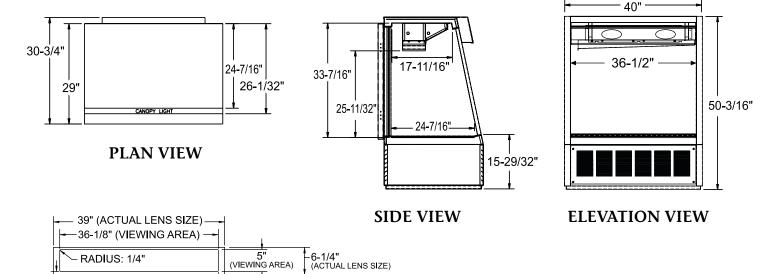

NON-REMOVABLE LENS DIMENSIONS

1-7/16" --

LISTINGS

3/4'



HOOKUP

Via plug in, 9 foot long, flexible 3 wire 14/3 cord with molded plug. Twenty amp service is required.



BID SPECIFICATIONS

Item no. FIP-40

Provide_____() Low Temp Ice Cream and Novelty Display Merchandiser(s), Master-Bilt model no. FIP-40.

Merchandiser(s), Master-bit model no. FP-40. Merchandiser to be provided with an electronically controlled monitoring system.

Construction features include textured finish on interior and exterior, stainless steel top serving deck, extra large non-fogging front display window, four panes of tempered front glass, backlit sign in stainless steel frame, adjustable heavy-duty, white epoxy-coated welded wire shelves, and a full length fluorescent lamp. Standard leveling legs provided to correct for unlevel flooring situations.

Merchandiser to also have automatic condensate evaporator and independent on/off light switch. Cabinet to be foamedin-place with "zero ODP" urethane insulation and to have a sparkling white polyester enamel interior and exterior. The doors are to be self-closing and have magnetic door gaskets. Rear doors are to be foamed-in-place.

The refrigeration system is to have a selfcontained, hermetic condensing unit using R-404A refrigerant. Refrigeration system will also contain a low maintenance bare tube condenser coil. The temperature range is to be 0° to -20°F (-18° to -29°C).

Merchandiser to have standard limited two year parts and labor with additional three year coverage on compressor part. Merchandiser to be UL, C-UL and UL EPH listed.

NOTE: Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity. All specifications subject to change without notice.



908 Highway 15 North • New Albany, MS 38652 PHONE: 800-647-1284 or 662-534-9061 • FAX: 800-232-3966 or 662-534-6049 • www.master-bilt.com