



MBBC50



MBBC SERIES

Deep Well Horizontal Bottle Coolers

MODELS

- MBBC50
- MBBC65
- MBBC95

FEATURES

CONSTRUCTION

- Stainless steel top
- Black vinyl coated steel finish on front, sides and back
- Galvanized steel interior with floor drain
- Lids constructed of stainless steel
- Door openings have plastic breaker strips to reduce condensation
- Foamed-in-place with low ODP polyurethane insulation
- Wall thickness: 1 1/2"
- Adjustable epoxy-coated dividers
- Standard cap catcher
- Standard analog thermostat

REFRIGERATION

- Self-contained refrigeration system metered by capillary tube
- Front breathing compressor on right side
- Evaporator coils are mounted to back wall and are epoxy-coated to resist corrosion
- Evaporator coils feature multiple fan motors and blades for greater air flow
- Condensate evaporator inside compressor housing
- Access to slide-out condensing unit behind front grille for easy cleaning and service

- Refrigerant: R-134a
- Temperature range: 33° to 38°F (.5° to 3°C)

WARRANTY

- **Standard limited three year parts and labor**
- **Additional two year coverage on compressor part**

OPTIONS

- Heavy-duty mobility kits (casters attached to support bars which attach to cabinet)

BID SPECIFICATIONS

Item no. MBBC_____. Provide _____ Deep Well Horizontal Bottle Cooler(s), Master-Bilt model no. MBBC_____.

Bottle coolers will feature stainless steel top and black vinyl front, sides and back. Interior will be galvanized steel with floor drain. Lids will be constructed of stainless steel. Door openings will have plastic

breaker strips to reduce condensation. Adjustable epoxy-coated dividers will also be standard.

The refrigeration system will be self-contained and use R-134a refrigerant. The temperature range will be 33° to 38°F (.5° to 3°C). System will be equipped with coated evaporator coils and a condensate


evaporator. Condensing unit will be slide-out type for easy cleaning and service.

Bottle cooler to have standard limited 3-year parts and labor warranty with additional 2-year on compressor part.


Bottle cooler to be ETL listed in the U.S. and Canada and ETL Sanitation listed.

TECHNICAL SPECIFICATIONS


MODEL	DIMENSIONS (in.)			DIMENSIONS (mm)			VOLTS	AMPS	UNIT H.P.	NO. OF DIVIDERS	NO. OF LIDS	CAPACITY 12 OZ. CANS/ 12 OZ. BOTTLES	SHIP CU. FT.	SHIP WT. (LB/KG)
	L	D	H	L	D	H								
MBBC50	50 ⁹ / ₁₆	26 ¹ / ₂	33 ⁵ / ₈	1284	673	854	115	5.9	1/4	3	2	704/286	37.0	240/109
MBBC65	65 ⁹ / ₁₆	26 ¹ / ₂	33 ⁵ / ₈	1665	673	854	115	6.2	1/3	4	2	890/360	45.5	302/137
MBBC95	95 ⁹ / ₁₆	26 ¹ / ₂	33 ⁵ / ₈	2427	673	854	115	6.3	1/3	7	3	1408/672	69.0	385/175




**MBBC50
PLAN VIEW**

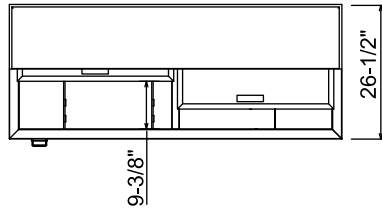


**MBBC65
PLAN VIEW**

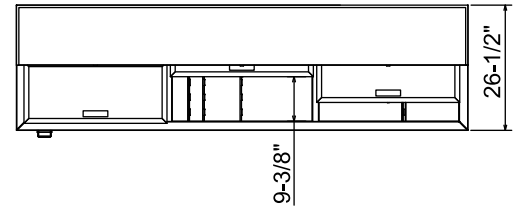


**MBBC95
PLAN VIEW**




**MBBC50
ELEVATION VIEW**

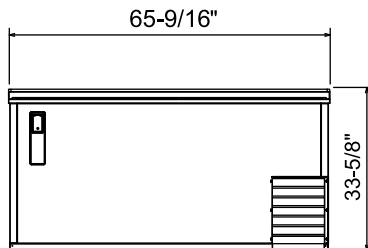

**MBBC65
ELEVATION VIEW**

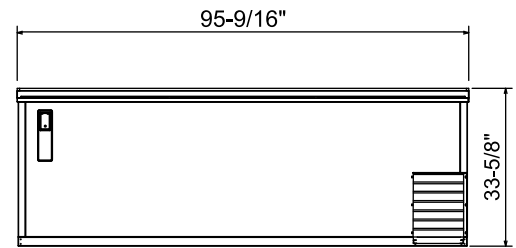

**MBBC95
ELEVATION VIEW**



**ALL MODELS
SIDE VIEW**

LISTINGS



HOOKUP

All models via plug in, 8 foot long flexible three wire 16 gauge cord with molded plug.



NOTE: Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity. All specifications subject to change without notice.