



MBGR48S



MBGR SERIES

Bottom Mounted
Sliding Glass Door
Reach-In Refrigerator

MODEL

☐ MBGR48S

This equipment is intended for storage and display of non-potentially hazardous bottled or canned products only.

FEATURES

CONSTRUCTION

- Black painted steel exterior
- White painted steel interior
- Foamed-in-place with low ODP polyurethane insulation
- Top graphic panel backlit by fluorescent lights (graphics not supplied)
- Interior vertical fluorescent lighting
- Wall thickness: 1.6"
- Adjustable legs for leveling
- Four adjustable heavy-duty vinyl-coated shelves per door

DOORS

- Hold open feature
- Self-closing
- Double pane glass with layer of patented transparent thermal insulation film between glass panes provides superior insulation without the weight of triple pane glass

REFRIGERATION

- Self-contained bottom mount refrigeration system
- Capillary tube to control refrigerant flow

- Fabric condensation kit uses wicks to draw condensate from the drain pan for faster removal
- Refrigerant: R-134a
- Temperature range: 32° to 40°F (0° to 4° C)


WARRANTY

- **Standard limited three year parts and labor**
- **Additional two year coverage on compressor part**


TECHNICAL SPECIFICATIONS

| MODEL | DIMENSIONS (in.) | | | DIMENSIONS (mm) | | | VOLTS | AMPS | UNIT H.P. | NO. OF DOORS | NO. OF SHELVES | STANDARD SHELF SIZE (in inches) | CAP. CU. FT. | SHIP CU. FT. | SHIP WT. (LB/KG) |
|---------|---------------------|--------|--------|--------------------|-----|------|-------|------|--------------|-----------------|-------------------|---------------------------------------|--------------------|--------------------|------------------------|
| | L | D* | H | L | D* | H | | | | | | | | | |
| MBGR48S | 53 1/4 | 30 3/4 | 78 3/4 | 1353 | 781 | 2363 | 115 | 10.0 | 1/2 | 2 | 8 | 24.2 x 23.5 | 48.0 | 83.8 | 476/216 |

*Depth includes door handle.

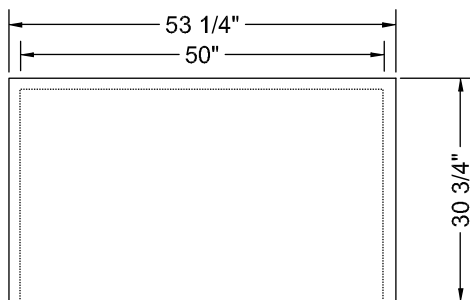

PLAN VIEW

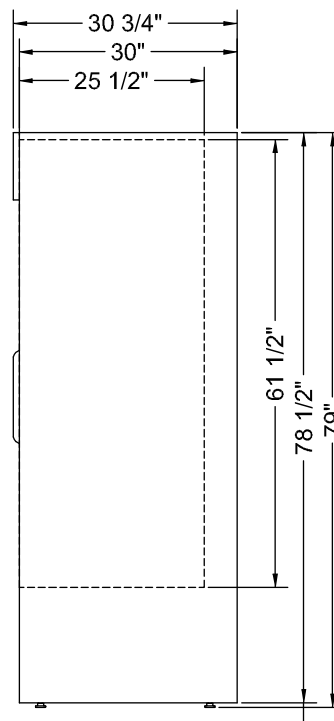

SIDE VIEW


LISTINGS



This equipment is intended for storage and display of non-potentially hazardous bottled or canned products only.

HOOKUP

All models via plug in, 9.8 foot long flexible three wire 14/3 cord with molded plug.



NEMA 5-15P

BID SPECIFICATIONS

Item no. MBGR48S. Provide _____ Bottom Mounted Glass Door Reach-in(s), Master-Bilt model no. MBGR48S.

Reach-in will be constructed of black painted steel exterior with white painted steel interior. Standard features will include

vinyl-coated welded wire shelves and doors with double pane glass.

The refrigeration system will be bottom mounted and self-contained. Refrigerant will be R-134A. The temperature range will be 32° to 40°F (0° to 4° C).

Reach-in to have standard limited three year parts and labor with additional two year coverage on compressor part.

Reach-in to be UL, C-UL and ETL Sanitation listed.

NOTE: Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity. All specifications subject to change without notice.