

- GEN-X® barrier tubing stops gas permeation to preserve beverage aroma and flavor.
- Dependable delivery of cold beer or wine from walk-in to tower.
- Black Diamond® is 15% more thermally efficient than traditional tape jacket.
- Color coded lines for easy identification.




CDI1032-X

Part No.	Description	Shipping Weight	Box Dimensions
□ CDI1032-X	10 Product Lines/2 Glycol Lines	.27 kg (per 305mm)	TBD
		.60 lbs (per foot)	TBD

Performance

Product Lines	9.5mm I.D. (3/8" I.D.) GEN-X® Barrier Tubing
Glycol Cooling Lines	12.7mm I.D. x 15.8mm O.D. (1/2" I.D. x 5/8" O.D.) Polyethylene Tubing Outgoing: Blue Color Coded Return: Red Color Coded
Moisture Barrier Wrap	Food Quality Barrier Film
Cold Transfer Wrap	Aluminum Foil
Insulation	19mm (3/4") Closed Cell
Black Diamond® Jacket	15% more thermally efficient than tape. Braiding reinforced, resistant to tearing.
Exterior Marks	Sequential Foot Marking, Every 610mm (2 Feet)
Fire Rating	Class 1 - Self extinguishing to BS3924, Class 1 when applied to insulation.
Certification	NSF/ANSI Standard 51 Food Equipment Materials.

Dimensions

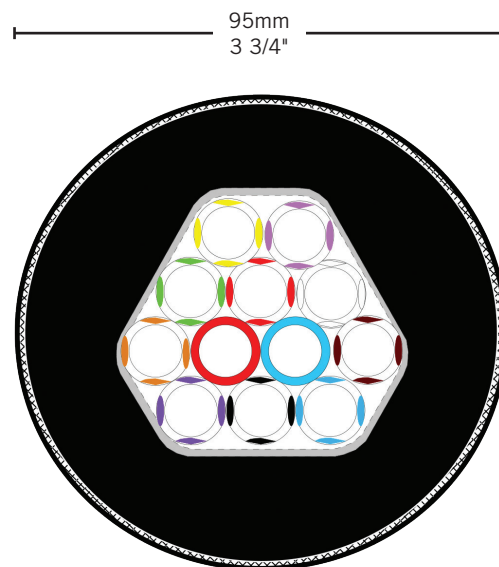

MICRO MATIC
 Toll-Free: 1-866-327-4159
www.micromatic.com

West
 19791 Bahama St.
 Northridge, CA 91324
 Tel. (818) 701-9765
 Fax. (818) 701-9844

Central
 10726 North Second St.
 Machesney Park, IL 61115
 Tel. (815) 968-7557
 Fax. (815) 968-0363

Southeast
 2364 Simon Ct.
 Brooksville, FL 34604
 Tel. (352) 799-6331
 Fax. (352) 796-2429

Northeast
 4601 Saucon Creek Rd.
 Center Valley, PA 18034
 Tel. (610) 625-4464
 Fax. (610) 625-4466