

Standard 51 Listed Food Equipment Materials

www.micromatic.com




Location: \_

Part No.	Description	Shipping Weight	Box Dimensions
CDI1254	12 Product Lines/4 Glycol Lines	.27 kg (per 305mm)	TBD
		.60 lbs (per foot)	TBD

## Performance

	1			
Product Lines	7.94 mm I.D. (5/16" I.D.) Brewery Approved Brewmaster II Barrier Tubing			
Glycol Cooling Lines	9.5mm I.D. x 12.7mm O.D. (3/8" I.D. x ½" O.D.) Polyethylene Tubing			
	Outgoing: Blue Color Coded			
	Return: Red Color Coded			
Moisture Barrier Wrap	Food Quality Barrier Film			
Cold Transfer Wrap	Aluminum Foil			
Insulation	19mm (¾") Closed Cell			
Black Diamond <sup>®</sup> Jacket	15% more thermally efficient than tape. Braiding reinforced, resistant to tearing			
Exterior Marks	Sequential Foot Marking, Every 610mm (2 Feet)			
Fire Rating	Class 1 - Self extinguishing to BS3924, Class 1 when applied to insulation.			
Certification	NSF/ANSI Standard 51 Food Equipment Materials.			

## Dimensions

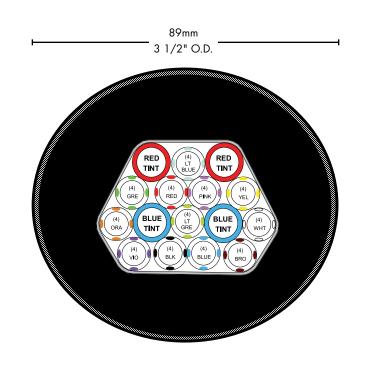

	Toll Free: 1-(866) 327-4159				
	West	Central	Southeast	Northeast	
	19791 Bahama Street	10726 North Second Street	2364 Simon Court	4601 Saucon Creek Road	
	Northridge, CA 91324	Machesney Park, IL 61115	Brooksville, FL 34604	Center Valley, PA 18034	
www.micromatic.com	Tel. (818) 701-9765	Tel. (815) 968-7557	Tel. (352) 799-6331	Tel. (610) 625-4464	
	Fax. (818) 701-9844	Fax. (815) 968-0363	Fax. (352) 796-2429	Fax. (610) 625-4466	