


- GEN-X® barrier tubing stops gas permeation to preserve beverage aroma and flavor
- Dependable delivery of cold beer or wine from walk-in to tower
- Color coded lines for easy identification

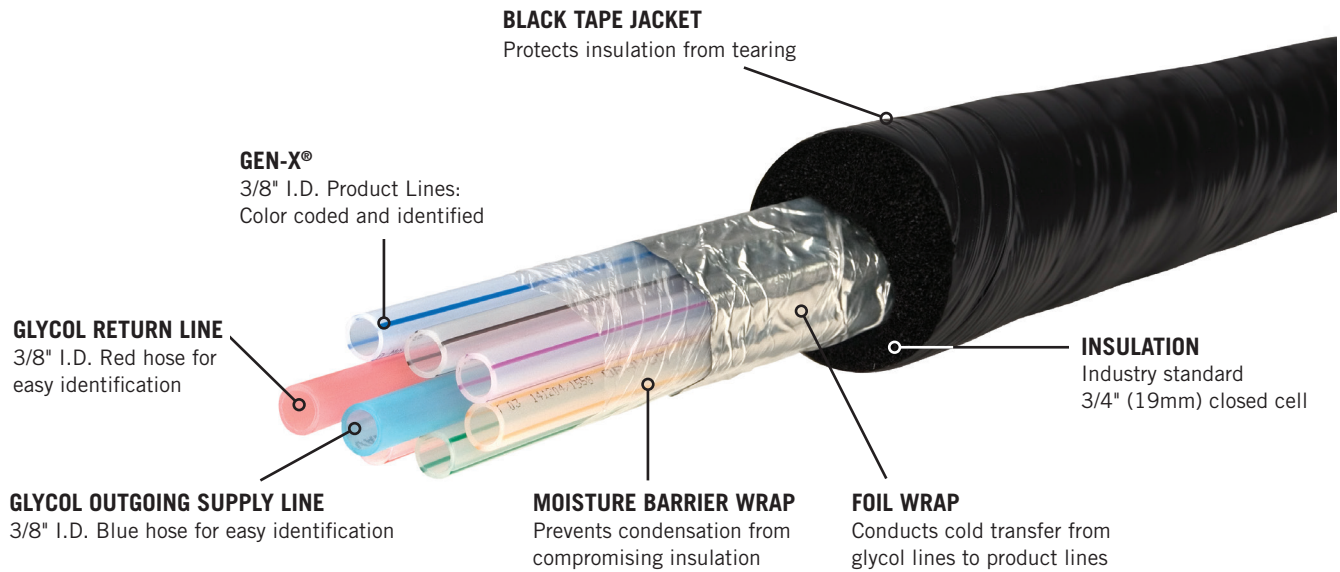


CDI2034-X

Part No.	Description	Shipping Weight	Box Dimensions
□ CDI2034-X	20 Product Lines/4 Glycol Lines	.27 kg (per 305mm)	TBD
		.60 lbs (per foot)	TBD

Performance

Product Lines	9.5mm I.D. (3/8" I.D.) GEN-X® Barrier Tubing
Glycol Cooling Lines	9.5mm I.D. x 12.7mm O.D. (3/8" I.D. x 1/2" O.D.) Polyethylene Tubing Outgoing: Blue Color Coded Return: Red Color Coded
Moisture Barrier Wrap	Food Quality Barrier Film
Cold Transfer Wrap	Aluminum Foil
Insulation	19mm (3/4") Closed Cell
Jacket	Smooth Vinyl
Exterior Marks	Sequential Foot Marking, Every 610mm (2 Feet)
Fire Rating	Class 1 - Self extinguishing to BS3924, Class 1 when applied to insulation
Certification	NSF/ANSI Standard 51 Food Equipment Materials

Dimensions

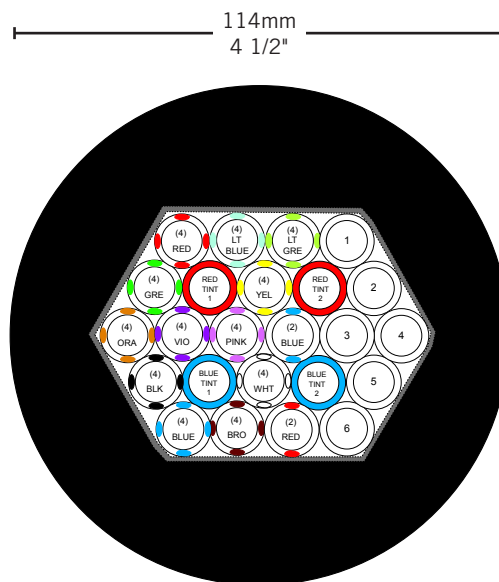

 **MICRO MATIC**
Toll-Free: 1-866-327-4159
www.micromatic.com

West
19791 Bahama St.
Northridge, CA 91324
Tel. (818) 701-9765
Fax. (818) 701-9844

Central
10726 North Second St.
Machesney Park, IL 61115
Tel. (815) 968-7557
Fax. (815) 968-0363

Southeast
2364 Simon Ct.
Brooksville, FL 34604
Tel. (352) 799-6331
Fax. (352) 796-2429

Northeast
4601 Saucon Creek Rd.
Center Valley, PA 18034
Tel. (610) 625-4464
Fax. (610) 625-4466