

- Dependable delivery of cold beer from walk-in to tower.
- Black Diamond is 15% more thermally efficient than traditional tape jacket.
- Brewery Approved tubing.
- Color coded lines for easy identification.



Features



Standard 51 Listed
Food Equipment Materials

Specifications

Micro Matic reserves the right to change specifications without notice.


AUTOQUOTES

Part No.	Description	Shipping Weight	Box Dimensions
<input type="checkbox"/> CDI232	2 Product Lines/2 Glycol Lines	.27 kg (per 305mm)	TBD
		.60 lbs (per foot)	TBD

Performance

Product Lines	9.5mm I.D. (3/8" I.D.) Brewery Approved Brewmaster II Barrier Tubing
Glycol Cooling Lines	9.5mm I.D. x 12.7mm O.D. (3/8" I.D. x 1/2" O.D.) Polyethylene Tubing
	Outgoing: Blue Color Coded
	Return: Red Color Coded
Moisture Barrier Wrap	Food Quality Barrier Film
Cold Transfer Wrap	Aluminum Foil
Insulation	19mm (3/4") Closed Cell
Black Diamond® Jacket	15% more thermally efficient than tape. Braiding reinforced, resistant to tearing
Exterior Marks	Sequential Foot Marking, Every 610mm (2 Feet)
Fire Rating	Class 1 - Self extinguishing to BS3924, Class 1 when applied to insulation.
Certification	NSF/ANSI Standard 51 Food Equipment Materials.

Dimensions

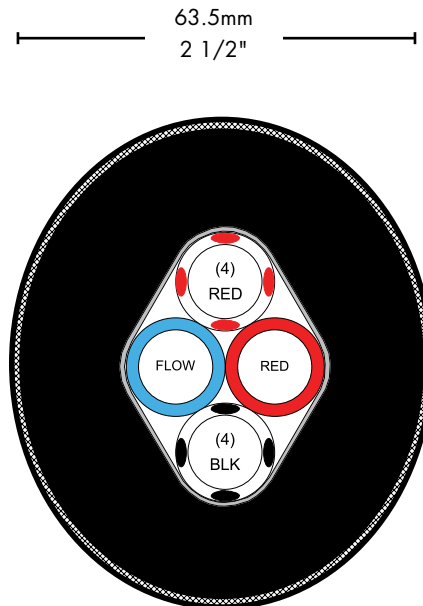

Copyright ©2012 Micro Matic USA, Inc. All Rights Reserved.

00146D0312



MICRO MATIC

www.micromatic.com

Toll Free: 1-(866) 327-4159

West	Central	Southeast	Northeast
19791 Bahama Street Northridge, CA 91324 Tel. (818) 701-9765 Fax. (818) 701-9844	10726 North Second Street Machesney Park, IL 61115 Tel. (815) 968-7557 Fax. (815) 968-0363	2364 Simon Court Brooksville, FL 34604 Tel. (352) 799-6331 Fax. (352) 796-2429	4601 Saucon Creek Road Center Valley, PA 18034 Tel. (610) 625-4464 Fax. (610) 625-4466