

Standard 51 Listed Food Equipment Materials

www.micromatic.com




Location:

Part No.	Description	Shipping Weight	Box Dimensions
CDI452	4 Product Lines/2 Glycol Lines	.27 kg (per 305mm)	TBD
		.60 lbs (per foot)	TBD

Performance

Product Lines	7.94 mm I.D. (5/16" I.D.) Brewery Approved Brewmaster II Barrier Tubing				
Glycol Cooling Lines	9.5mm I.D. x 12.7mm O.D. (3/8" I.D. x ½" O.D.) Polyethylene Tubing				
	Outgoing: Blue Color Coded				
	Return: Red Color Coded				
Moisture Barrier Wrap	Food Quality Barrier Film				
Cold Transfer Wrap	Aluminum Foil				
Insulation	19mm (¾") Closed Cell				
Black Diamond [®] Jacket	15% more thermally efficient than tape. Braiding reinforced, resistant to tearing				
Exterior Marks	Sequential Foot Marking, Every 610mm (2 Feet)				
Fire Rating	Class 1 - Self extinguishing to BS3924, Class 1 when applied to insulation.				
Certification	NSF/ANSI Standard 51 Food Equipment Materials.				

Dimensions

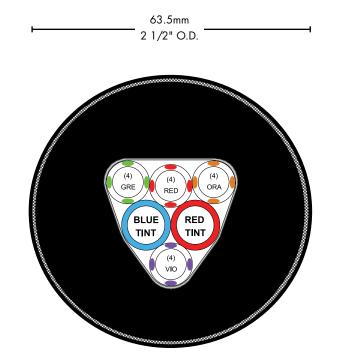



www.micro

) MATIC	Toll Free: 1-(866) 327-4159				
	West	Central	Southeast	Northeast	
tic.com	19791 Bahama Street Northridge, CA 91324 Tel. (818) 701-9765 Fax. (818) 701-9844	10726 North Second Street Machesney Park, IL 61115 Tel. (815) 968-7557 Fax. (815) 968-0363	2364 Simon Court Brooksville, FL 34604 Tel. (352) 799-6331 Fax. (352) 796-2429	4601 Saucon Creek Road Center Valley, PA 18034 Tel. (610) 625-4464 Fax. (610) 625-4466	