




- Dependable delivery of cold beer from walk-in to tower.
- Black Diamond is 15% more thermally efficient than traditional tape jacket.
- Brewery Approved tubing.



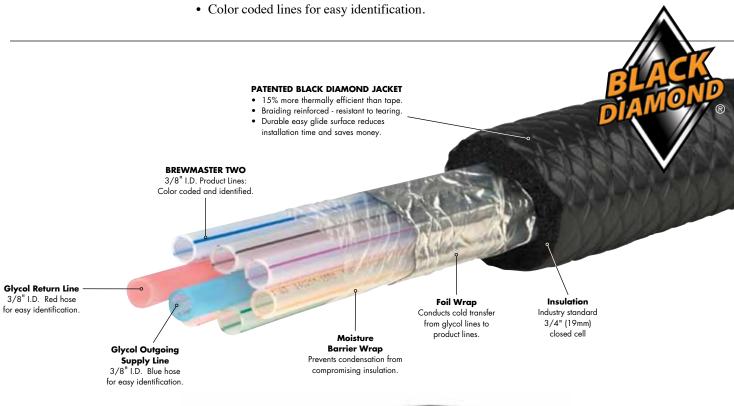

Features



<u>www.micromatic.com</u> 1 (866) 327-4159


Job Number: Location:

Part No.	Description	Shipping Weight	Box Dimensions
☐ CDI532	5 Product Lines/2 Glycol Lines	.27 kg (per 305mm)	TBD
		.60 lbs (per foot)	TBD

Performance

Product Lines	9.5mm I.D. (3/8" I.D.) Brewery Approved Brewmaster II Barrier Tubing	
Glycol Cooling Lines	9.5mm I.D. x 12.7mm O.D. (3/8" I.D. x ½" O.D.) Polyethylene Tubing	
	Outgoing: Blue Color Coded	
	Return: Red Color Coded	
Moisture Barrier Wrap	Food Quality Barrier Film	
Cold Transfer Wrap	Aluminum Foil	
Insulation	19mm (¾") Closed Cell	
Black Diamond® Jacket	15% more thermally efficient than tape. Braiding reinforced, resistant to tearing	
Exterior Marks	Sequential Foot Marking, Every 610mm (2 Feet)	
Fire Rating	Class 1 - Self extinguishing to BS3924, Class 1 when applied to insulation.	
Certification	NSF/ANSI Standard 51 Food Equipment Materials.	

Dimensions

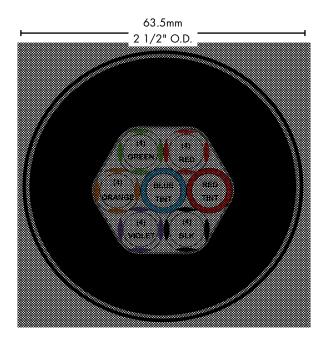

Copyright ©2012 Micro Matic USA, Inc. All Rights Reserved.

00148-D0312



West

Central

Southeast

Toll Free: 1-(866) 327-4159

Northeast