



- Dependable delivery of cold beer from walk-in to tower.
- Black Diamond is 15% more thermally efficient than traditional tape jacket.
- Brewery Approved tubing.
- Color coded lines for easy identification.

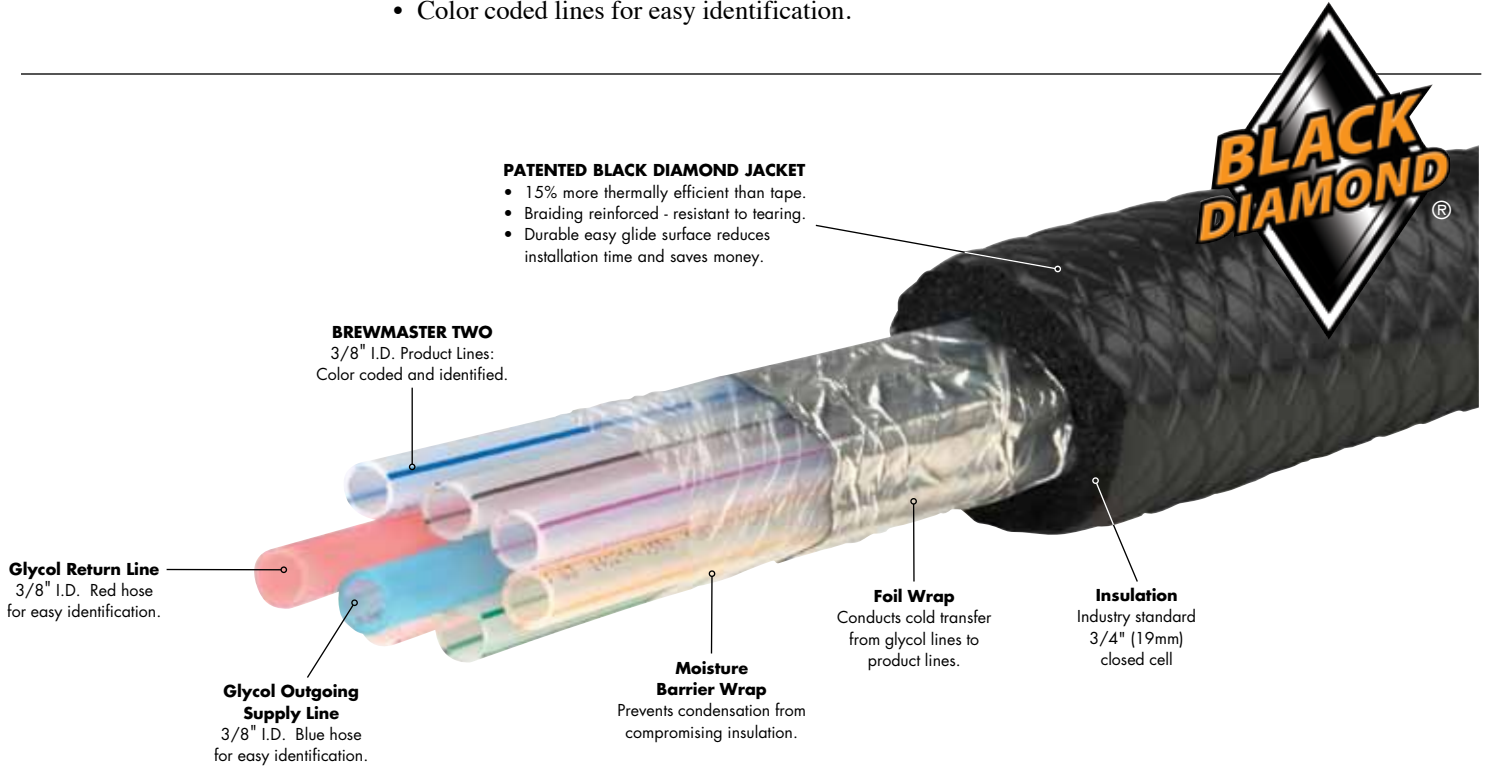

Features

 Standard 51 Listed
Food Equipment Materials


Specifications

Part No.	Description	Shipping Weight	Box Dimensions
<input type="checkbox"/> CDI552	5 Product Lines/2 Glycol Lines	.27 kg (per 305mm)	TBD
		.60 lbs (per foot)	TBD

Performance

Product Lines	7.94 mm I.D. (5/16" I.D.) Brewery Approved Brewmaster II Barrier Tubing
Glycol Cooling Lines	9.5mm I.D. x 12.7mm O.D. (3/8" I.D. x 1/2" O.D.) Polyethylene Tubing
	Outgoing: Blue Color Coded
	Return: Red Color Coded
Moisture Barrier Wrap	Food Quality Barrier Film
Cold Transfer Wrap	Aluminum Foil
Insulation	19mm (3/4") Closed Cell
Black Diamond® Jacket	15% more thermally efficient than tape. Braiding reinforced, resistant to tearing
Exterior Marks	Sequential Foot Marking, Every 610mm (2 Feet)
Fire Rating	Class 1 - Self extinguishing to BS3924, Class 1 when applied to insulation.
Fire Rating	Class 1 - Self extinguishing to BS3924, Class 1 when applied to insulation.

Dimensions

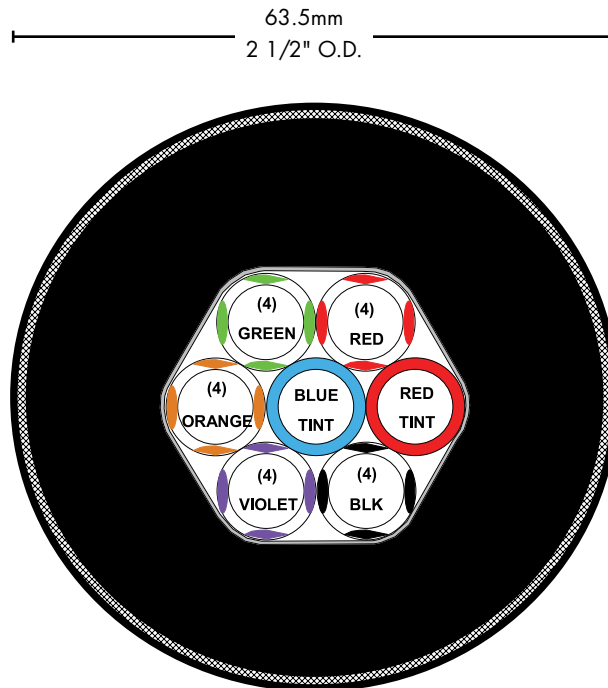

Copyright ©2012 Micro Matic USA, Inc. All Rights Reserved.

00154D0312



www.micromatic.com

Toll Free: 1-(866) 327-4159

West	Central	Southeast	Northeast
19791 Bahama Street Northridge, CA 91324 Tel. (818) 701-9765 Fax. (818) 701-9844	10726 North Second Street Machesney Park, IL 61115 Tel. (815) 968-7557 Fax. (815) 968-0363	2364 Simon Court Brooksville, FL 34604 Tel. (352) 799-6331 Fax. (352) 796-2429	4601 Saucon Creek Road Center Valley, PA 18034 Tel. (610) 625-4464 Fax. (610) 625-4466