

- Combine with other platform trays for continuous drain area.
- Specify two corner units to create a 90° radius.
- Perfect choice for either a new install or retrofit a damaged bar top.
- Robust 18 gauge stainless steel module.



Stainless Steel  
**DP-1601**

## Features



- S** Stainless Steel for improved hygiene and durability.

Part No.	Description	Shipping Weight	Box Dimensions
<input type="checkbox"/> <b>DP-1601</b>	Stainless Steel	3 Kg	457mm L 457mm W x 76mm H
		5 lbs	18"L x 18"W x 3"H

**Rinser Water Inlet Installation**

- Always check local plumbing codes first.
- Install in-line water regulator set at 15 PSI from the street water supply (no greater, perfect operating pressure).
- Install in-line one way check valve from the street water supply (prevents pressure drop which can cause leaking).
- Install in-line shut-off for the rinsing system from the street water supply (this must be turned off nightly).
- If teed into soda system make sure system can handle the increased water demand. Have plumber install a 45° 1/2" O.D. barb for the drains if line is not hard plumbed into the system.
- Install a shut-off for the rinsing water supply if line is not hard plumbed into the system.

**Dimensions**

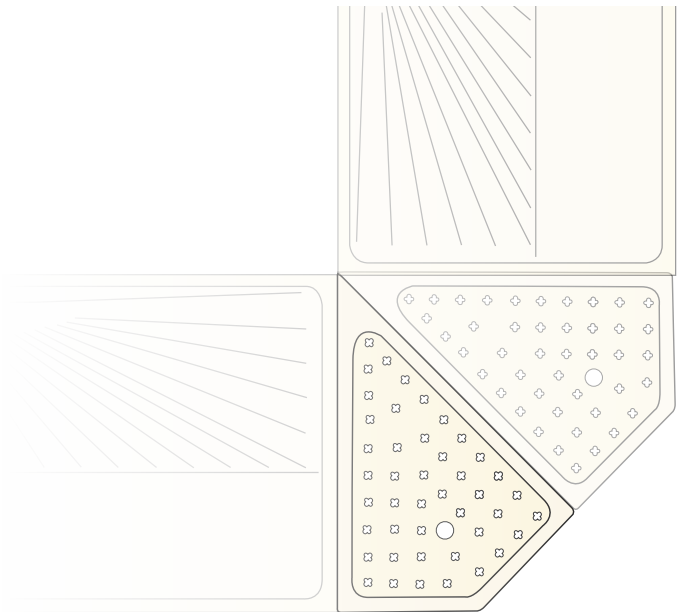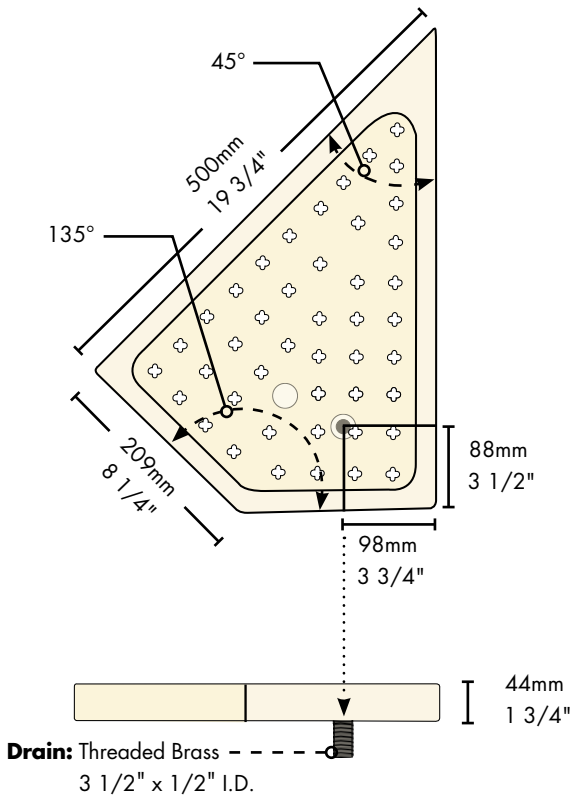

Installation Suggestion

Copyright ©2012 Micro Matic USA, Inc. All Rights Reserved.

00553-D0312

Toll Free: 1-(866) 327-4159

West	Central	Southeast	Northeast
19791 Bahama Street Northridge, CA 91324 Tel. (818) 701-9765 Fax. (818) 701-9844	10726 North Second Street Machesney Park, IL 61115 Tel. (815) 968-7557 Fax. (815) 968-0363	2364 Simon Court Brooksville, FL 34604 Tel. (352) 799-6331 Fax. (352) 796-2429	4601 Saucon Creek Road Center Valley, PA 18034 Tel. (610) 625-4464 Fax. (610) 625-4466