


WALL MOUNT 16" WITH GLASS RINSER

- Add European style while creating dispense excitement.
- Condition the glass before pouring invert glass, push down on sprayer for cold water rinsing.
- Easy installation: beverage shanks mount through and secure tray to wall.
- Welded corners, finished smooth for safety and appearance.

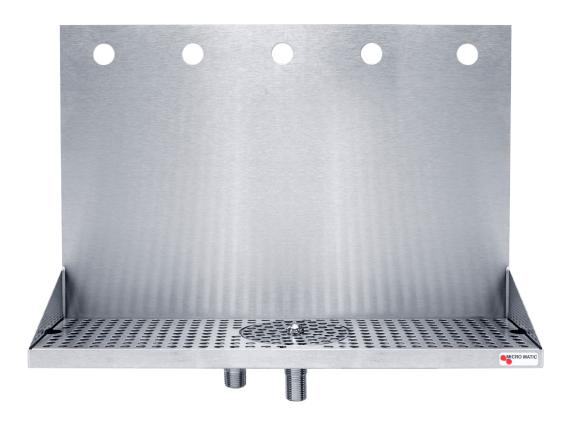

<u>DP-322LD-5GR</u> Brushed Stainless Steel

Stainless Steel for improved hygiene and durability.

www.micromatic.com • 1 (866) 327-4159

WALL MOUNT WITH GLASS RINSER

Job Number: Location: __




Part No.	Dimensions	Description	Shipping Weight	Box Dimensions
☐ DP-322LD-5GR	16" Width	5 Holes	TBD	TBD

Rinser Water Inlet Installation

- Always check local plumbing codes first.
- Install in-line water regulator set at 15 PSI from the street water supply (no greater, perfect operating pressure).
- Install in-line one way check valve from the street water supply (prevents pressure drop which can cause leaking).
- Install in-line shut-off for the rinser system from the street water supply (this must be turned off nightly).
- If teed into soda system make sure system can handle the increased water demand. Have plumber install a 45° 1/2" O.D. barb for the drains if line is not hard plumbed into the system.
- Install a shut-off for the rinser water supply if line is not hard plumbed into the system.

Dimensions

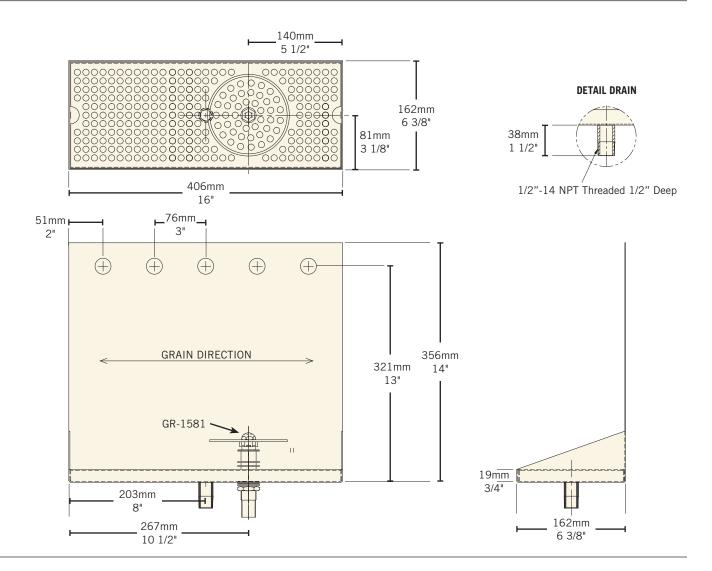



Toll-Free: 1-866-327-4159 www.micromatic.com

West

19791 Bahama St. Northridge, CA 91324 Tel. (818) 701-9765 Fax. (818) 701-9844

Central

10726 North Second St. Machesney Park, IL 61115 Tel. (815) 968-7557 Fax. (815) 968-0363

Southeast

2364 Simon Ct. Brooksville, FL 34604 Tel. (352) 799-6331 Fax. (352) 796-2429

Northeast

4601 Saucon Creek Rd. Center Valley, PA 18034 Tel. (610) 625-4464 Fax. (610) 625-4466