

- Designed by beer-industry experts for performance and value.
- Commercial grade construction – built to last.
- Side mounted evaporator for maximum interior space utilization.
- Glass doors units for expanded merchandising.



Black

MBB58

Black with Glass Doors

MBB58G

Stainless Steel

MBB58S

Stainless Steel with Glass Doors

MBB58GS**Feature**

Listed by Edison
Testing Laboratories.
Conforms to UL & NSF Standards.


| Part No. | Exterior Finish | Doors | Shipping Weight | Box Dimensions |
|---------------------------|----------------------------------|-------|-----------------|-------------------------------|
| ☐ MBB58 | Black With Solid Doors | 2 | 156 kg | 1537mm L x 762mm W x 1143mm H |
| | | | 343 lbs | 60 1/2"L x 30"W x 45"H |
| ☐ MBB58G | Black With Glass Doors | 2 | 156 kg | 1537mm L x 762mm W x 1143mm H |
| | | | 343 lbs | 60 1/2"L x 30"W x 45"H |
| ☐ MBB58S | Stainless Steel With Solid Doors | 2 | 156 kg | 1537mm L x 762mm W x 1143mm H |
| | | | 343 lbs | 60 1/2"L x 30"W x 45"H |
| ☐ MBB58GS | Stainless Steel With Glass Doors | 2 | 156 kg | 1537mm L x 762mm W x 1143mm H |
| | | | 343 lbs | 60 1/2"L x 30"W x 45"H |

Operating Performance

| | | | |
|-------------------------------------|-----------------------|------------------------|------------|
| Capacity of 1/2 Kegs | 2 | Running Amps | 6.5 |
| Cubic Feet (liters) | 23.7 (670) | Voltage | 115/60/1 |
| Shelves, Flat - Included | 2 | Plug Type | NEMA-5-15P |
| Shelves, Dividers - Included | 2 (64 cans per shelf) | Cord Length | 8' |
| Cans 12 oz (355ml) | 852 | Refrigerant | R-134a |
| Approval | ETL Listed | Charge oz (Grs) | 10.5 (300) |
| Condenser HP | 1/3 | | |

| | |
|--------------------|--|
| Exterior | All Models: 18 gauge stainless steel top, 22 gauge solid doors, 24 gauge steel front, sides and back. Black Models: Front, sides, back and doors black vinyl over steel. Stainless Steel Models: Front, sides, back & doors are stainless steel. |
| Interior | 20 gauge stainless steel floor, reinforced frame, 24 gauge galvanized walls |
| Ventilation | Front and back ventilated |
| Plumbing | Automatic condensate evaporator, no drain connection required. Evaporator condensate has been plumbed to a condensate pan located in the compressor housing. |
| Insulation | Foamed-in-place using high density, CFC-free polyurethane; 1-1/2" top, walls and floor. |
| Accessories | Castors or 6" Fixed Legs |

Dimensions

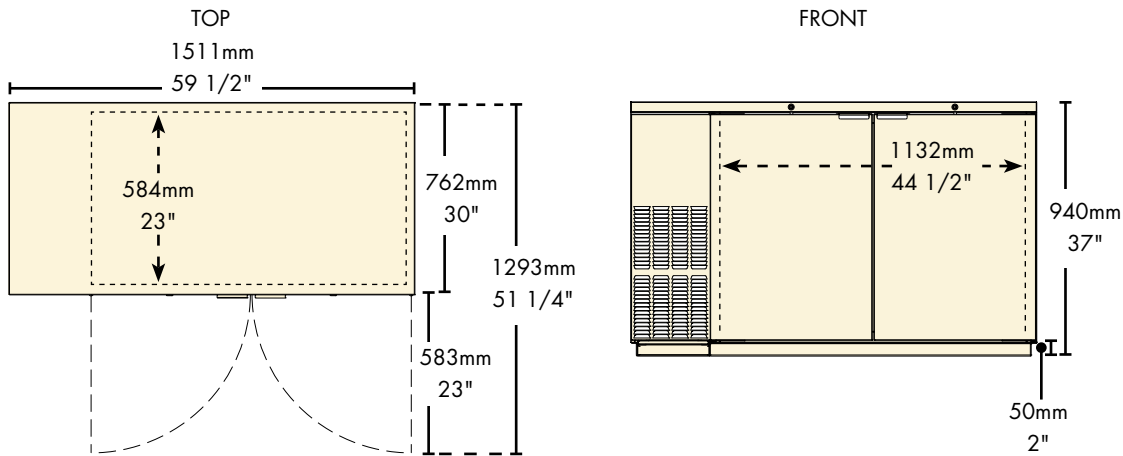

Copyright ©2012 Micro Matic USA, Inc. All Rights Reserved. 00459D0312



www.micromatic.com

Toll Free: 1-(866) 327-4159

| West | Central | Southeast | Northeast |
|---|---|---|---|
| 19791 Bahama Street Northridge, CA 91324 Tel. (818) 701-9765 Fax. (818) 701-9844 | 10726 North Second Street Machesney Park, IL 61115 Tel. (815) 968-7557 Fax. (815) 968-0363 | 2364 Simon Court Brooksville, FL 34604 Tel. (352) 799-6331 Fax. (352) 796-2429 | 4601 Saucon Creek Road Center Valley, PA 18034 Tel. (610) 625-4464 Fax. (610) 625-4466 |