

- Pro-Line 50" 23 Case
- Designed by beer-industry experts for performance and value.
- Commercial grade construction built to last.
- Raised glass rail on top creates convenient storage area.
- Free flow refrigeration system ensures "Ice Cold" products.





Feature



Listed by Edison Testing Laboratories. Conforms to UL & NSF Standards.

www.micromatic.com



Specifications


Micro Matic reserves the right to change specifications without notice. **AUTOQUOTES**

Part No.	Exterior Finish	Lids	Shipping Weight	Box Dimensions
<u>MDW50</u>	Black	2	118 kg	1321mm L x 762mm W x 839mm H
			260 lbs	52"L x 30"W x 33 3/8"H
<u>MDW505</u>	Stainless Steel	2	118 kg	1321mm L x 762mm W x 839mm H
			260 lbs	52"L x 30"W x 33 3/8"H

Operating Performance

Capacity	32 cases (12 oz can)	Condenser HP	1/3		
	23.3 cases (12 oz bottle)	Running Amps	6		
Dividers	3	Voltage	115/60/1		
Lid Locks	Standard	Plug Type	NEMA-5-15R		
Interior Light	Standard	Cord Length	8'		
Cap Opener/Catcher	Standard	Refrigerant	R-134a		
Exterior	All Models: 18 gauge stainless steel top with raised glass rails. Black Models: Front, sides, and back black vinyl over steel. Stainless Steel Models: Front, sides and back are stainless steel.				
Interior	Durable galvanized steel. NSF approved for pre-packaged and bottle products.				
Ventilation	Front and side ventilation.				
Plumbing	Automatic condensate evaporator, no drain connection required. Evaporator condensate has been plumbed to a condensate pan located in the compressor housing.				
Insulation	Foamed-in-place using high density, CFC-free polyurethane; 1-1/2" top, walls and floor.				
Accessories	Castors or 6" Fixed Legs				

Dimensions

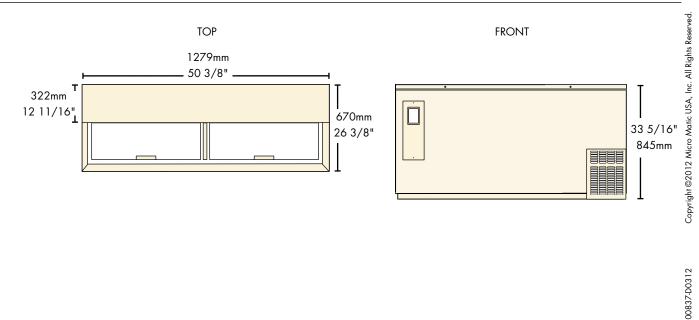

Toll Free: 1-(866) 327-4159 **MICRO MATIC** West Central **Southeast** Northeast 19791 Bahama Street 10726 North Second Street 2364 Simon Court 4601 Saucon Creek Road Northridge, CA 91324 Machesney Park, IL 61115 Brooksville, FL 34604 Center Valley, PA 18034 Tel. (818) 701-9765 Tel. (815) 968-7557 Tel. (610) 625-4464 Tel. (352) 799-6331 www.micromatic.com Fax. (352) 796-2429 Fax. (818) 701-9844 Fax. (815) 968-0363 Fax. (610) 625-4466