





GLASS RINSER


6" COUNTER MOUNT

- Add European style while creating dispense excitement.
- Condition the glass before pouring - invert glass, push down on sprayer for cold water rinsing.
- Space-saving size.
- Robust 10 gauge stainless steel for durable long-lasting performance.

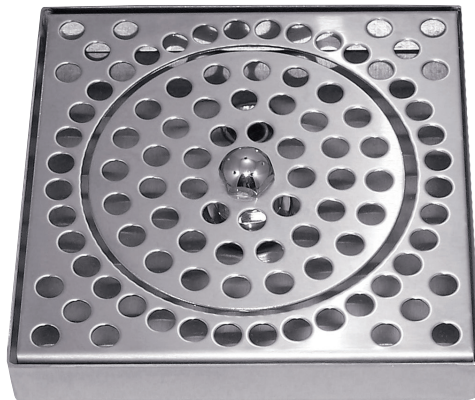

MM-5821

 Glass rinser assembly only.

 Stainless Steel for improved hygiene and durability.

www.micromatic.com • 1 (866) 327-4159

GLASS RINSER - 6" COUNTER MOUNT

Job Number: _____ Location: _____

Part No.	Description	Shipping Weight	Box Dimensions
□ MM-5821	Brushed Stainless Steel	3 kg	508mm L x 229mm W x 267mm H
		7 lbs	14"L x 7 1/2"W x 4"H

Rinser Water Inlet Installation

- Always check local plumbing codes first.
- Install in-line water regulator set at 15 PSI from the street water supply (no greater, perfect operating pressure).
- Install in-line one way check valve from the street water supply (prevents pressure drop which can cause leaking).
- Install in-line shut-off for the rinser system from the street water supply (this must be turned off nightly).
- If teed into soda system make sure system can handle the increased water demand. Have plumber install a 45° 1/2" O.D. barb for the drains if line is not hard plumbed into the system.
- Install a shut-off for the rinser water supply if line is not hard plumbed into the system.

Dimensions

