



- Engineered by beer-industry experts for performance and value.
- Digital thermostat for accurate glycol bath temperature.
- Insulated cabinet maintains glycol temperature while minimizing condensation.
- Exterior sight glass to verify glycol bath level.



[MMPP4301-EP](#)



### Feature

 ETL Listed.


# Specifications

Part No.	Description	Shipping Weight	Box Dimensions
<input type="checkbox"/> <a href="#">MMPP4301-EP</a>	Air Cooled	53 kg	660mm L x 457mm W x 558mm H
		118 lbs	26"L x 18"W x 22"H

# Operating Performance

<b>Compressor</b>	1/3 HP
<b>BTU per hour</b>	2,300
<b>Plug Type (NEMA #)</b>	5-15P
<b>Voltage</b>	115
<b>Running</b>	7.0A
<b>Refrigerant</b>	R-134a
<b>Charge</b>	.28 kg (10 oz)
<b>Bath Capacity</b>	19 litre (5 Gallons)
<b>Pump Type</b>	Vertical
<b>Inlet Barb:</b>	9.52mm (3/8")
<b>Outlet Barb:</b>	9.52mm (3/8")
<b>Cabinet Cover</b>	Included

# Dimensions

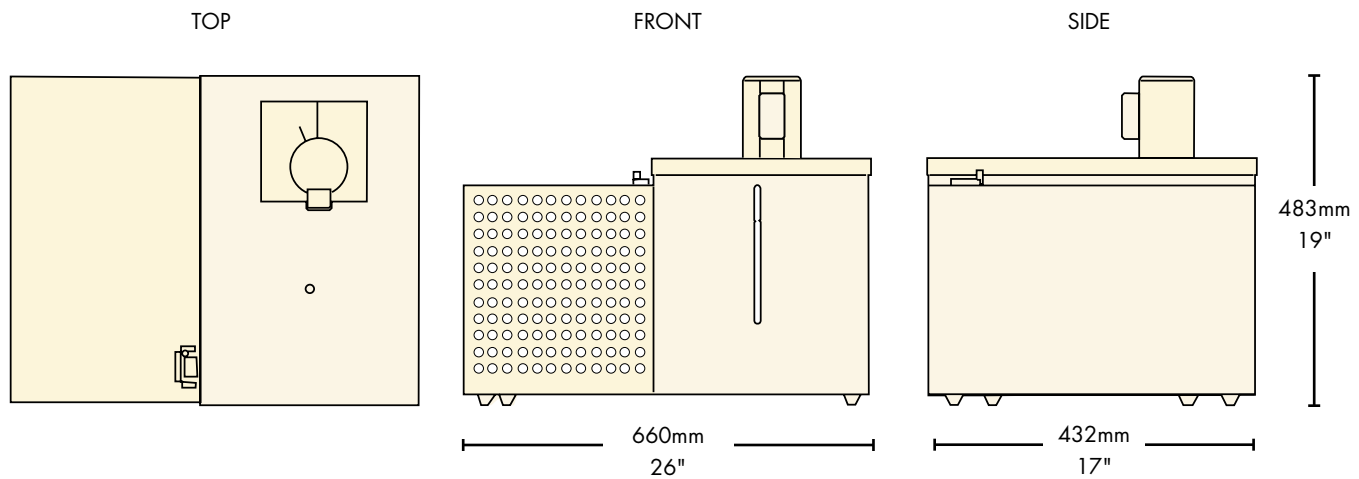

Copyright ©2011 Micro Matic USA, Inc. All Rights Reserved.

00015D0210



[www.micromatic.com](http://www.micromatic.com)

Toll Free: 1-(866) 327-4159

West	Central	Southeast	Northeast
19791 Bahama Street Northridge, CA 91324 Tel. (818) 701-9765 Fax. (818) 701-9844	10726 North Second Street Machesney Park, IL 61115 Tel. (815) 968-7557 Fax. (815) 968-0363	2364 Simon Court Brooksville, FL 34604 Tel. (352) 799-6331 Fax. (352) 796-2429	4601 Saucon Creek Road Center Valley, PA 18034 Tel. (610) 625-4464 Fax. (610) 625-4466