

## TECHNICAL DATA SHEET FOR E22M3 ON THE SK23 STAND

Half Size Manual / Electric Convection Oven  
on a Stainless Steel Stand

### STANDARD FEATURES

- 3 half size sheet pan capacity
- 2 $\frac{5}{8}$ " / 70mm tray spacing
- Compact 24" / 610mm width
- Single direction low-velocity fan
- 1.5kW heating power
- 110-120V plug-in 15A NEMA 5-15P cordset fitted
- Porcelain enameled oven chamber
- Plug-in continuous oven door seal
- Safe-Touch vented drop down door
- Stay-Cool door handle
- Heavy-duty door hinges
- Easy clean door glass system
- Mechanical thermostat 150-500°F / 50-260°C
- 60 minute timer with time up alarm
- Anti-skid 2" / 50mm dia. 3" / 76mm high adjustable stainless steel feet
- 3 oven wire racks supplied
- 100% recyclable packaging

### ACCESSORIES

- Turbofan SK23 Oven Stand



### E22M3

Unit shall be a Moffat electrically heated Turbofan convection oven E.T.L. listed and NSF-4 listed. The oven shall have a one piece porcelain enameled oven chamber, stainless top and sides and safe touch vented easy clean drop down door. Oven shall have capacity for three half size sheet pans. The oven shall have a single direction low velocity fan system. The oven shall be controlled by a mechanical thermostat with a range of 150-500°F / 50-260°C, and 60 minute bake timer. Oven shall be able to be bench mounted on 3" / 76mm feet or mounted on oven stand model SK23. Oven shall be fitted with a NEMA 5-15P cordset. Unit shall be supplied in 100% recyclable shipping packaging.

### SK23

Unit shall be a Moffat Turbofan stainless steel oven stand NSF-4 listed. The stand shall be constructed from stainless steel tube with castors, with front castors having dual swivel and wheel locks. It shall be fitted with 6 tray runners suitable for half size sheet pans. The stand shall be fully compatible with, and support, Turbofan Convection Oven models E22M2 and E23M3. Unit shall be supplied in 100% recyclable shipping packaging.

### E22M3 Half Size Manual / Electric Convection Oven on a Stainless Steel Stand

#### CONSTRUCTION

- Porcelain enameled fully welded oven chamber
- Stainless steel front, sides and top exterior
- Stainless steel oven fan baffle
- Removable 3 position chrome plated wire side racks
- Oven racks chrome plated wire (3 supplied)
- Stainless steel frame drop down hinged door
- 0.2" / 5mm thick door outer glass
- 0.2" / 5mm thick low energy loss door inner glass
- Heavy-duty counterbalanced door hinges
- Wear resistant powder coated welded door handle
- Stainless steel control panel
- Aluminized coated steel base and rear panels

#### CONTROLS

- Power ON control panel indicator
- Mechanical thermostat 150-500°F / 50-260°C
- Heating ON control panel indicator
- Manual 60 minute timer
- Time-Up control panel indicator and buzzer

#### CLEANING

- Stainless steel top and sides continuous exterior panel
- Porcelain enameled oven chamber
- Fully removable chrome plated oven side racks
- Removable stainless steel oven fan baffle
- Easy clean door system with hinge out door inner glass (no tools required)
- Removable plug-in oven door seal (no tools required)
- 3" / 76mm high stainless steel feet for easy access underside

#### SPECIFICATIONS

- Electrical Requirements
- 110-120V, 50/60Hz, 1-phase, 1.5kW, 12A
- NEMA 5-15P cordset fitted



#### External Dimensions

- Width 24" / 610mm
- Height 21¾" / 552mm including 3" / 76mm feet
- Depth 23⅞" / 608mm

#### Oven Internal Dimensions

- Width 19½" / 495mm
- Height 10" / 250mm
- Depth 13⅜" / 340mm
- Volume 1.48ft³ / 0.042m³

#### Oven Rack Dimensions

- Width 18" / 460mm
- Depth 13" / 330mm

#### Nett Weight (E22M3)

- 78lbs / 35.4kg

#### Packing Data (E22M3)

- 106lbs / 48kg
- 12 ft³ / 0.34m³
- Width 29½" / 750mm
- Height 27¾" / 705mm
- Depth 25" / 635mm

### SK23 Stainless Steel Stand

- All stainless steel welded frame oven stand for Turbofan E22 and E23 Series ovens
- 6 position tray runners standard
- 3" / 76mm diameter wheel swivel castors standard with 2 front castors with dual swivel and wheel
- Welded 1½" and 1¼" square tube front and rear frames
- Welded rack supports/side frames
- 4 dia. 3" / 76mm swivel castors with 2 front castors dual wheel and swivel lock
- Top frame oven supports suit Turbofan E22 and E23 Series
- Oven mounting
- Supplied CKD for assembly on site

#### External Dimensions (SK23 Oven Stand)

- Width 24" / 610mm
- Height 34⅞" / 880mm
- Depth 20⅞" / 530mm

#### Nett Weight (SK23 Oven Stand)

- 35lbs / 16kg

#### Packing Data (SK23 Oven Stand)


- 40lbs / 18kg
- 3.2ft³ / 0.09m³
- Width 24⅞" / 630mm
- Height 35½" / 900mm
- Depth 6" / 152mm

#### INSTALLATION CLEARANCES

- Rear 1" / 25mm
- LH Side 1" / 25mm
- RH Side 1" / 25mm

#### CLEARANCE FROM SOURCES OF HEAT

- A minimum distance of 12" / 300mm from the appliance sides is required

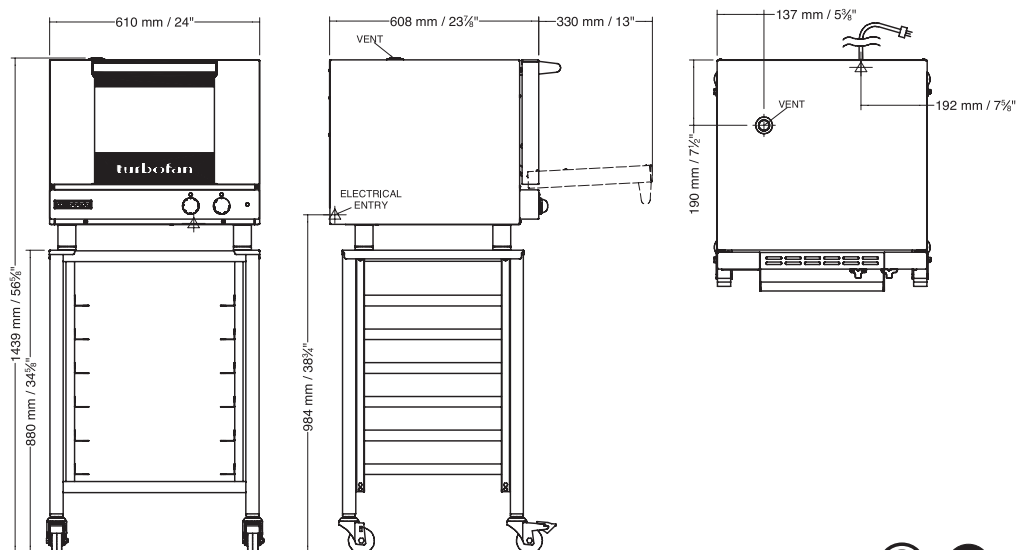

www.moffat.com

#### U.S.A.

- Moffat Inc
- 3765 Champion Boulevard
- Winston-Salem
- North Carolina 27105
- Ph Toll Free 1-800-551 8795
- Ph 336-661 0257
- Fax 336-661 9546
- Email sales@moffat.com
- www.moffat.com

Manufactured by:

- Moffat Limited
- 16 Osborne Street PO Box 10-001
- Christchurch 8081 New Zealand



ISO9001  
Quality  
Management  
Standard

Designed and manufactured by



#### ISO9001

- All Turbofan products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.



© Copyright Moffat Ltd  
Moffat 1270 / 3.12

