

### TECHNICAL DATA SHEET FOR E31D4 DOUBLE STACKED

#### Half Size Digital / Electric Convection Ovens Double Stacked on a Stainless Steel Base Stand

E31D4/2 - Double stack with adjustable feet base stand

E31D4/2C - Double stack with castor base stand

##### DOUBLE STACK FEATURES

- Two 4 half size sheet pan or hotel pan capacity
- Compact 26¼" / 666mm depth x 31⅞" / 810mm width
- Full stainless steel base stand
- Full stainless steel oven spacer frame
- Adjustable feet or castor models
- Guard rail for bottom oven

##### OVEN FEATURES (each)

- 4 half size sheet pan or hotel pan capacity
- 3⅞" / 80mm tray spacing
- 15A plug-in (NEMA 6-15P cordset fitted)
- Digital display Time and Temperature Controls
- Large easy view ¾" / 20mm high displays
- Electronic thermostat control
- Electronic timer with countdown or time count modes
- Programmable for up to 20 programs
- Broil mode
- Single direction low-velocity fan
- 2.8kW heating in bake mode / 2.0kW grill-broil elements
- Safe-Touch vented side hinged door (standard LH hinge). Optional RH hinge (field convertible)
- Stay-Cool door handle
- Porcelain enameled oven chamber
- Plug-in continuous oven door seal
- Halogen oven lamp
- 4 oven wire racks supplied



Model E31D4/2C shown

##### E31D4/2 E31D4/2C

E31D4 ovens shall be Moffat electrically heated Turbofan convection ovens E.T.L. listed and NSF-4 listed. The ovens shall have a one piece porcelain enameled oven chamber, stainless top and sides and safe touch vented easy clean side hinged door that offers field reversible hinging. Ovens shall have capacity for four half size sheet pans and include a top broiling oven element and broil operating mode. The ovens shall be controlled by an electronic control having separate digital displays and adjusting knobs for time and temperature functions. The oven controls shall allow both manual and programmed operating modes and have separate control keys for selection of Broil mode, oven light function and timer operation. The units shall include a halogen oven lamp. Ovens shall be fitted with a NEMA 6-15P cordset. Ovens shall be double stacked using Double Stacking Kits DSK272831 (adjustable feet option) or DSK272831C (castor option). Units shall be supplied in 100% recyclable shipping packaging.

Double stack models are supplied as two individual ovens and a double stacking kit for field assembly.

# 30D SERIES

E31D4/2  
E31D4/2C

# turbofan®

## E31D4/2 E31D4/2C Half Size Digital / Electric Convection Ovens Double Stacked on a Stainless Steel Base Stand

### CONSTRUCTION - OVENS

Porcelain enameled fully welded oven chamber  
Stainless steel front, sides and top exterior  
Porcelain enameled oven fan baffle  
Removable 4 position chrome plated wire side racks  
Oven racks chrome plated wire (4 supplied)  
Stainless steel frame side hinged door  
0.2" / 5mm thick door outer glass  
0.2" / 5mm thick low energy loss door inner glass  
Full stainless steel welded door handle  
Stainless steel control panel  
Aluminized coated steel base and rear panels

### CONSTRUCTION - DOUBLE STACKING KIT

All stainless steel construction  
Welded 1½" and 1¼" square tube front and rear frame base stand  
4 adjustable feet on E31D4/2  
4 dia. 3" / 76mm swivel castors with 2 front castors dual wheel and swivel lock on E31D4/2C  
Stainless steel oven spacer frame  
Stainless steel bottom oven vent extension

### CONTROLS (each oven)

Electronic controls with Digital Time and Temperature display, Manual or Program modes  
Large ¾" / 20mm high LED displays  
Two individual time and temperature setting control knobs  
6 function keys  
ON/OFF key  
Oven Lamp key (toggle or auto-time off mode settings)  
Timer Start/Stop key  
Broil/Grill mode quick select key  
Programs select key  
Actual temperature display key  
Adjustable buzzer/alarm volume  
Thermostat range 150-500°F / 50-260°C  
Timer range from 180 minutes in countdown mode  
Timer range up to 999 minutes in time count mode for holding, slow cooking  
Over-temperature safety cut-out

### CLEANING

Stainless steel top and sides continuous exterior panel  
Porcelain enameled oven chamber  
Fully removable chrome plated oven side racks  
Removable porcelain enameled oven fan baffle  
Easy clean door system with hinge out door inner glass (no tools required)  
Removable plug-in oven door seal (no tools required)

### SPECIFICATIONS

Electrical Requirements (each oven)  
208V, 60Hz, 1-phase, 2.9kW, 13.9A  
220-240V, 60Hz, 1-phase, 3.1W, 12.9A  
NEMA 6-15P cordset fitted



### External Dimensions

Width 31⅞" / 810mm  
Height 63⅞" / 1611mm (E31D4/2)  
66⅞" / 1693mm (E31D4/2C)  
Depth 26¼" / 666mm

### Oven Internal Dimensions

Width 22¼" / 565mm  
Height 16¾" / 425mm  
Depth 15½" / 395mm  
Volume 3.2ft³ / 0.09m³

### Oven Rack Dimensions

Width 21¼" / 540mm  
Depth 14½" / 370mm

Nett Weight (double stack complete)  
300lbs / 126kg

### Packing Data (E31D4 ovens each)

150lbs / 68.2kg  
15.9 ft³ / 0.45m³  
Width 29⅞" / 740mm  
Height 28⅞" / 720mm  
Depth 32⅞" / 835mm

### Packing Data (Stacking Kit)

42lbs / 19kg (DSK272831 - adjustable feet)  
48lbs / 22kg (DSK272831C - castor)  
2.8ft³ / 0.08m³  
Width 23¼" / 590mm  
Height 33⅞" / 840mm  
Depth 6¼" / 160mm

Supplied CKD for assembly on site

### INSTALLATION CLEARANCES


Rear 1" / 25mm  
LH Side 1" / 25mm  
RH Side 1" / 25mm

### CLEARANCE FROM SOURCES OF HEAT

A minimum distance of 12" / 300mm from the appliance sides is required

### Double Stacking Kits

For after market double stacking two E31D4 convection ovens  
DSK272831 - Double stacking kit - adjustable feet  
DSK272831C - Double stacking kit - castor

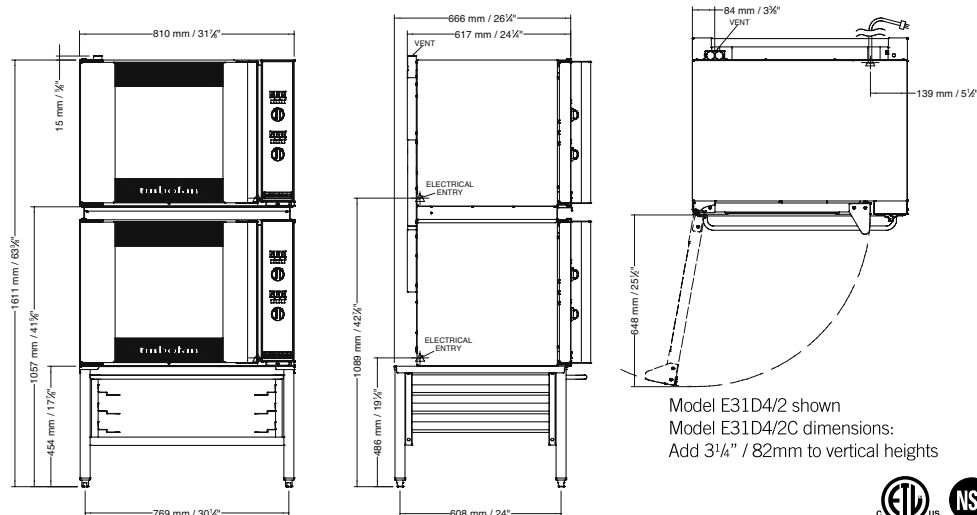

## MOFFAT®

www.moffat.com

U.S.A.

Moffat Inc  
3765 Champion Boulevard  
Winston-Salem  
North Carolina 27105  
Ph Toll Free 1-800-551 8795  
Ph 336-661 0257  
Fax 336-661 9546  
Email sales@moffat.com  
www.moffat.com

Manufactured by:

Moffat Limited  
16 Osborne Street PO Box 10-001  
Christchurch 8081 New Zealand



ISO9001  
Quality  
Management  
Standard

Designed and manufactured by

## MOFFAT®

ISO9001

All Turbofan products are designed and manufactured by Moffat using the internationally recognised ISO9001 quality management system, covering design, manufacture and final inspection, ensuring consistent high quality at all times.

In line with policy to continually develop and improve its products, Moffat Limited reserves the right to change specifications and design without notice.

© Copyright Moffat Ltd  
Moffat 1270 / 3.12

