




LEGEND™ Heavy-Duty Gas 48-72" (1219-1829mm) Counter-Top Griddles

Item No. _____

Project _____

Quantity _____

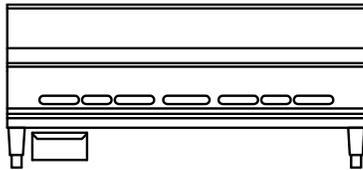

Model 2/C24-8 shown

| MODEL GUIDE* | | | | |
|--------------|-----------------|---------------|------------|--------|
| ✓ | Model No. | Overall Width | Controls | |
| | | | Type | Number |
| | 2/C24-8T | 48" (1219mm) | Thermostat | 2 |
| | 2/C24-8 | 48" (1219mm) | Manual | 6 |
| | 2/C36-8T/C18-8T | 54" (1372mm) | Thermostat | 3 |
| | 2/C36-8/C18-8 | 54" (1372mm) | Manual | 6 |
| | 2/C36-8T/C24-8T | 60" (1524mm) | Thermostat | 3 |
| | 2/C36-8/C24-8 | 60" (1524mm) | Manual | 7 |
| | 2/C36-8T | 72" (1829mm) | Thermostat | 4 |
| | 2/C36-8 | 72" (1829mm) | Manual | 8 |

*For narrower models see specification sheet HCG-4A

SHORT/BID SPECIFICATION

Counter-top Griddle shall be a Montague **Legend Model:** ____ [Specify: 2/C24 = 48" (1219mm), 2/C36/C18 = 54" (1372mm) C36/C24 = 60" (1524mm) or 2/C36 = 72" (1829mm) wide] -8 [for Manual Control(s)] or -8T [for Thermostat Control(s)], unit with a 3/4" (19mm) thick precision ground cook surface, 4" (102mm) high rear splash and tapered side splashes, 2-5/8" (67mm) wide front grease trough with drop to grease drawer and 15,000 BTU/hr or 20,000 BTU/hr -T Models) burner(s); with stainless steel front, 4" (102mm) high flue riser, 3" (76mm) deep front rail and 4" (102mm) legs standard; plus all the features listed and options/accessories checked:

STANDARD GRIDDLE FEATURES:

- 3/4" (19mm) thick precision-ground steel cook surface
- 4" (102mm) high backsplash and tapered side-splashes
- 2-5/8" (67mm) wide front grease trough pitched to the grease drop
- Bottom-mounted, slide-out 1-gallon capacity grease drawer
- Two grease drawers provided on 48" (1219mm), 54" (1372mm), 60" (1524mm) & 72" (1829mm) wide models
- Standard 15,000 BTU/hr gas burners with standing pilots & gas control valves
- 20,000 BTU/hr gas burners [-T Models] with thermostat controls
- Adjusting bolts for changing griddle plate forward pitch
- Standard has 28" deep frytop

STANDARD BASE CONSTRUCTION:

- Satin finish stainless steel front with 3" (76mm) deep front rail
- Stainless steel exterior bottom
- Stainless steel 4" (102mm) rear flue riser
- 4" (102mm) adjustable nickel finish legs
- 1-1/4" front gas manifold with 1/2 union on each end

AGENCY APPROVALS

- NSF Listed
- ETL Design Certified to ANSI Z83.11 • CSA 1.8
- CE Approved • EN 203-1



HDGS-5 [Rev. 1/13]


LEGEND™ Heavy-Duty Gas 48-72" (1219-1829mm) Counter-Top Griddles

Item No. _____

Project _____

Quantity _____

Dimensions in brackets are millimeters

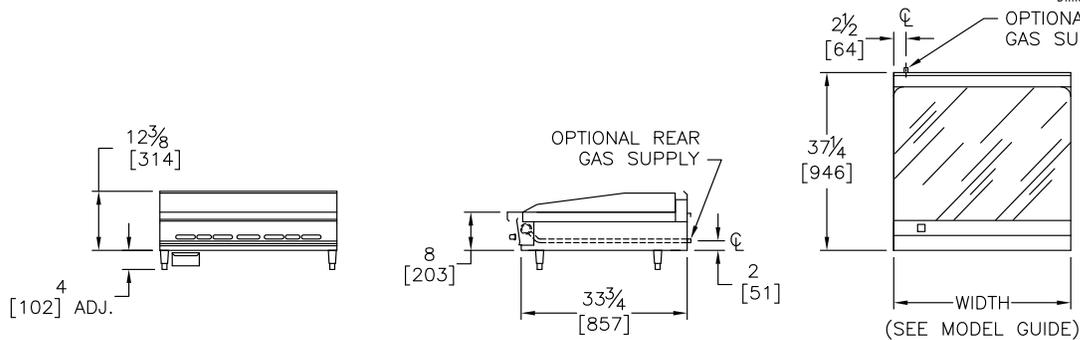

FRONT VIEW

RIGHT SIDE VIEW

TOP VIEW

OPTIONS GUIDE:

General:

- 42" (1067mm) Griddle Depth [Add Suffix -40]
- 4" (102mm) special base w/ grease drawer [M Prefix]
- Equipment Stand [Consult Factory]

Flex Connector Kit [1" NPT:

- 3' (914mm) 4' (1219mm)

Panels/Risers/Shelves:

- Stainless steel back panel
- 18" (457mm) high riser
- 6" (152mm) wide stainless steel plate shelf
- 8" plate shelf

For Griddle/Fry Top:

- 1" (25mm) thick griddle plate
- 1" (25mm) thick grooved griddle plate

- 1" (25mm) Chrome plate [thermostats required]
- 34" (864mm) deep plate [Add Suffix -40]
Standard depth 28" (711mm)
- Thermostatically controlled [Add Suffix -T]
- 450° and 550° thermostat options

Manifolds:

[Specify left or right rear with pressure regulator]:

- 1" NPT up to 400,000 BTU/hr

Manifold Cap:

- left side right side

Stainless Manifold Cover:

- left side right side

Finish:

- Stainless steel back panel
- Stainless steel side panels:

- left side right side

Special Finish

[Consult Factory]

Controls: [see Heavy Duty option page HDS-44]

- Electronic rangetop pilot ignition
- Flame failure rangetop safety valves
- Electronic rangetop pilot ignition & flame failure rangetop safety valves

International Approvals:

- CE - Conformance Européenne - EN203-1
Includes flame failure valve option
- AGA - Australian Gas Association - AS 4563
Includes flame failure valve option
- Canadian Approval

INSTALLATION REQUIREMENTS & SHIPPING INFORMATION

- Griddle must be installed in accordance with local codes or in their absence with the National Fuel Gas Code: ANSI Z223.1; Natural Fuel Gas Code: CAN/CGA-B149.1 or Propane Installation Code: CAN/CGA-B149.2, as applicable. Compliance with codes is the responsibility of the Owner and Installer.
- An adequate ventilation system is required. Refer to National Fire Protection Association Standard No. 96, "Vapor Removal from Cooking Equipment."
- This appliance is intended for commercial use by professionally trained personnel. NOT intended for Residential Use.
- Specify installation elevation: _____ if above 2,000 ft (610m).
- GAS INLET SIZE (All Models): 1-1/4" (32mm) front manifold with 1/2" union on each end provided for battery connection. A properly sized gas pressure regulator must be furnished by the Installer.
- The incoming gas line pressure into the regulator should be 8"-14" w.c. for natural gas, and 12"-14" w.c. for propane gas.

| Minimum Clearances | Combustible Construction | Noncombustible Construction |
|---------------------------------|--|-----------------------------|
| From Back Wall | 2" (51mm) | 0" |
| Left & Right Side | 6" (152mm) | 0" |
| With or without 4" (102mm) legs | Suitable for installation on non-combustible counters ONLY | |

| Models: | Burners | Specify Type of Gas: | | Shipping Weight | Shipping Class | Cube (Crated) ft ³ /m ³ |
|--------------------|---------|----------------------------------|----------------------------------|------------------|----------------|---|
| | | <input type="checkbox"/> Natural | <input type="checkbox"/> Propane | | | |
| Manifold Pressure: | | 6.0" WC | 10.0" WC | | | |
| | | BTU/hr (kW) | BTU/hr (kW) | | | |
| 2/C24-8T | 6 | 120,000 (35.2) | 120,000 (35.2) | 620 lbs (281 kg) | 85 | 18/.5 |
| 2/C24-8 | 6 | 90,000 (26.4) | 90,000 (26.4) | 620 lbs (281 kg) | 85 | 18/.5 |
| 2/C36-8T/C18-8T | 6 | 120,000 (35.2) | 120,000 (35.2) | 672 lbs (305 kg) | 85 | 21/.6 |
| 2/C36-8/C18-8 | 6 | 90,000 (26.4) | 90,000 (26.4) | 672 lbs (305 kg) | 85 | 21/.6 |
| 2/C36-8T/C24-8T | 7 | 140,000 (41) | 140,000 (41) | 742 lbs (336 kg) | 85 | 23/.64 |
| 2/C36-8/C24-8 | 7 | 105,000 (30.8) | 105,000 (30.8) | 742 lbs (336 kg) | 85 | 23/.64 |
| 2/C36-8T | 8 | 160,000 (46.9) | 160,000 (46.9) | 864 lbs (392 kg) | 85 | 28/.8 |
| 2/C36-8 | 8 | 120,000 (35.2) | 120,000 (35.2) | 864 lbs (392 kg) | 85 | 28/.8 |

Due to continuous product improvements, specifications are subject to change without notice.



THE MONTAGUE COMPANY

1830 Stearman Avenue, Hayward, CA 94545
800 345-1830 • Fax: 510 785-3342
www.montaguecompany.com

