

LEGENDHeavy-Duty Extreme Cuisine Refrigerated Equipment Bases

Item No.	
Project	
Quantity	
3	

Extreme Cuisine



SHORT/BID SPECIFICATION

Counter-top equipment to be mounted to a Montague **Legend Extreme** *Cuisine* Refrigerated Cabinet Base Model:

- □ RB- ____ [Specify width: 36" (914mm), 48" (1219mm), 60" (1524mm), 72" (1829mm), 84" (2134mm). 96" (2438mm) or 108" (2743mm)] ____ [Specify: **R** = Remote Refrigeration (condensing unit by others) or **SC** = Self Contained Refrigeration Package]
- ...heavy-duty low ergonomic-height low profile refrigerator designed to support heavy countertop cooking equipment with integrated transition base, stainless steel body, frame, front, sides; heavy-duty drawer system with pan supports, 2" (51mm) thick CFC-free insulation and 6" (152mm) high stainless steel height-adjustable legs standard; plus all the features listed and options/accessories checked:

REFRIGERATION PACKAGE FEATURES:

- ☐ -SC Self-Contained Models:
 - Balanced, hermetic condensing unit provided, installed at right
 - Condensate evaporator
 - Evaporater coil with T-stat
 - Solenoid + expansion valve
 - 6' (1829mm) power cord with grounded plug provided

☐ -R Remote Models

No condensing unit [by others]

- Evaporator coil with T-stat, solenoid and expansion valve
- Pre-piped + pre-wired
- Refrigeration, drain line and electric connection will be stubbed out as specified: ☐ LE left-end, ☐ RE right-end, ☐ BL back-left,
 ☐ BR back-right

HEAVY-DUTY DRAWER SYSTEM FEATURES:

- 300 lbs (136 kg) individual drawer weight capacity
- Can accommodate up to 6" (152mm) deep, 12" x 20" (305 x 508mm) pans
- Heavy 14-gauge stainless steel track system
- Tandem 2" (51mm) diameter stainless steel wheels
- Recessed drawer handles
- Drawers are easily removed for cleaning

Self-Contained MODEL GUIDE								
			Draw	Drawers: Width & No.				
1	Model Number	Unit Width Inches (mm)	14-3/8" (356mm)	22-3/8" (568mm)	27-1/4" (692mm)	Total Pans		
	RB-36-SC	36" (914)	2			2		
	RB-48-SC	48" (1219)			2	4		
	RB-60-SC	60" (1524)	2	2		5		
	RB-72-SC	72" (1829)		2	2	7		
	RB-84-SC	84" (2134)			4	8		
	RB-96-SC	96" (2438)		4	2	10		
	RB-108-SC	108" (2743)			6	12		

Remote Refrigeration MODEL GUIDE

			Draw			
1	Model Number	Unit Width Inches (mm)	14-3/8" (356mm)	22-3/8" (568mm)	27-1/4" (692mm)	Total Pans
	RB-36-R	36" (914)			2	4
	RB-48-R	48" (1219)	2	2		5
	RB-60-R	60" (1524)		2	2	7
	RB-72-R	72" (1829)			4	8
	RB-84-R	84" (2134)		4	2	10
	RB-96-R	96" (2438)			6	12
	RB-108-R	108" (2743)		6	2	13

STANDARD BASE CONSTRUCTION:

- Low profile for ergonomic countertop equipment work height
- All welded construction
- Stainless steel front, top & sides
- Back & bottom stainless steel
- Large analog dial thermometer
- Interior liner is stainless steel with 1/4" (6mm) radius corners
- 2" (51mm) thick CFC-free polyurethane insulation
- 6" (152mm) height-adjustable stainless steel legs standard

AGENCY APPROVALS

- ETL-Sanitation listed
- ETL listed




LEGEND Heavy-Duty Extreme Cuisine Refrigerated Equipment Bases

Item No.	
Project	
Quantity	

Extreme Cuisine

Dimensions in brackets are millimeters

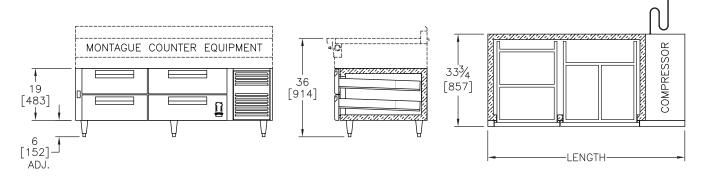

FRONT VIEW RIGHT SIDE VIEW TOP VIEW

OPTIONS GUIDE:

☐ 6" (152mm)	diameter	casters	[4-8 c]	depending	J
on width]					

- ☐ Curb mounting [Consult Factory]
- ☐ Stainless steel top with marine edge

Custom Options (Consult Factory):

- ☐ Custom sizes & configurations
- ☐ Freezer Bases
- ☐ Compressor compartment on left
- □ Drawer padlocking

INSTALLATION REQUIREMENTS & SHIPPING INFORMATION

- Extreme Cuisine refrigerated bases are designed and sized for use with Montague Legend Heavy-Duty Countertop cooking equipment. [See Legend Countertop Specification Sheets.]
- Follow installation, ventilation and wall clearance requirements for the countertop cooking equipment mounted on the refrigerated base.

Minimum Clearances	Follow clearance of mounted equipment				
From Back Wall	0"				
Right Side -SC Models	6" (152mm)				

Electrical Requirements							Cube		
Model:	Width Inches (mm)	HP*	Voltage	Phase	Amps	BTU's	Shipping Weight	Shipping Class	(Crated) ft3/m3
RB-36-R	36" (914)	_	115	1	1.0	800	350 lbs (159 kg)	85	13/.4
RB-48-R	48" (1219)	_	115	1	1.6	1200	400 lbs (181 kg)	85	18/.5
RB-60-R	60" (1524)	_	115	1	2.0	1600	450 lbs (204 kg)	85	23/.7
RB-72-R	72" (1829)	_	115	1	2.0	1600	500 lbs (227 kg)	85	27/.8
RB-84-R	84" (2134)	_	115	1	3.0	2400	550 lbs (249 kg)	85	32/.9
RB-96-R	96" (2438)	_	115	1	3.0	2400	600 lbs (272 kg)	85	36/1
RB-108-R	108" (2743)	_	115	1	4.0	3200	780 lbs (354 kg)	85	41/1.1
RB-36-SC	36" (914)	1/3	115	1	8.4	1000	470 lbs (213 kg)	85	13/.4
RB-48-SC	48" (1219)	1/3	115	1	8.4	800	495 lbs (225 kg)	85	18/.5
RB-60-SC	60" (1524)	1/3	115	1	8.4	1200	525 lbs (238 kg)	85	23/.7
RB-72-SC	72" (1829)	1/3	115	1	8.4	1600	550 lbs (249 kg)	85	27/.8
RB-84-SC	84" (2134)	1/3	115	1	8.4	1600	625 lbs (283 kg)	85	32/.9
RB-96-SC	96" (2438)	1/3	115	1	8.4	2400	700 lbs (317 kg)	85	36/1
RB-108-SC	108 (2743)	1/3	115	1	8.4	2400	875 lbs (397 kg)	85	41/1.1

^{*}HP = Motor Horsepower

Due to continuous product improvements, specifications are subject to change without notice.



THE MONTAGUE COMPANY

1830 Stearman Avenue, Hayward, CA 94545 800 345-1830 · Fax: 510 785-3342 www.montaguecompany.com

