

Simply Engineered Better

MD44

High Temperature Rack Conveyor Dishwashing Machine



SPECIFIER STATEMENT

Specified unit will be Moyer Diebel MD44 rack conveyor dishwashing machine.

Features include: chemical connections, vent fan interlock and table limit switch connections, energy sentinel, extended vent cowls with stack and dampers, built in diagnostics and anti-jam conveyor drive system.

1 year parts and labor warranty.









| Project | | |
|----------|--|--|
| Item No | | |
| Quantity | | |

STANDARD FEATURES

• ENERGY STAR® Qualified

- High performance 219 racks per hour
 130 gallons [108 imp gal] per hour
 0.59 gallons [.49 imp gal] per rack
- Low water consumption
- Energy Sentinel, for low water usage
- Built-in diagnostics
- Easy clean stainless steel upper and lower wash and rinse arms
- Stainless steel vent cowls and extra curtain (set)
- Anti-jam conveyor system
- Vent fan interlock connection
- Table limit switch connection
- Single point electrical connection
- Single point water connection
- Drain is a manual ball valve
- Booster heater is optional

☐ Copper final rinse lines☐ Extended vent stack

- Complete with two 20" x 20" racks, one peg and one rack
- One year parts and labor warranty

OPTIONS & ACCESSORIES

| ☐ 40°F (4°C) rise (16 kW) electric booster |
|---|
| ☐ 70°F (21°C) rise (27 kW) electric booster |
| ☐ Direction of operation |
| ☐ Right to left |
| ☐ Left to right |
| ☐ Table limit switch |
| ☐ Drain water tempering kit (mounted & interwired) |
| ☐ Voltage 480/60/3 |
| ☐ Water Pressure Reducing Valve (unmounted) (standard with booster) |
| ☐ Shock arrester (unmounted) |

Moyer Diebel - USA

3765 Champion Blvd, Winston-Salem, NC 27105 Tel: 336/661-1992 Fax: 336/661-1979 800/228-8350 www.moyerdiebel.com



MD44

Right to Left

High Temperature Rack Conveyor Dishwashing Machine

Utilities

1 Electrical

Machine and booster (See electrical chart)

2 Hot water

Main connection 3/4" NPT. 110°-140°F (43°-60°C) 20-22 PSI Flow pressure (124-152 kPA) PRV supplied with booster only

5 Drain Connection

1-1/2" NPT

8 Vent Stack Connection

A. Load end 150 CFM @ 1/4" static pressure

B. Unload end 400 CFM @ 1/4" static pressure

SPECIFICATIONS

Capacity

Racks per hr. (NSF rated) 219 Conveyor speed (ft/min) 6.0

Motor Horsepower

Wash 2

Water Consumption

Per hr. (max. use) 130 US gal/ 108 imp.gal Per rack .59 US gal/.49 imp.gal

Heating

Tank heat, electric (kW) 15

Electric booster

(kW supplied for 40° F rise) 16

27


Electric booster


(kW supplied for 70° F rise)


Warning: Plumbing and electrical connections should be made by qualified personnel who will observe all the applicable plumbing, sanitary and safety codes.

| Machine only | | | | |
|-----------------|--------------|---|--|--|
| Elec. Specs. | Rate Amps | Maximum Supply Ckt. Conductor Ampacity | Maximum Overcurrent Protective Device | |
| 208/60/3 | 53 | 70 | 70 | |
| 240/60/3 | 48 | 60 | 60 | |
| 480/60/3 | 25 | 30 | 30 | |

Shipping weight crated: **755 lbs. [342 kg]**





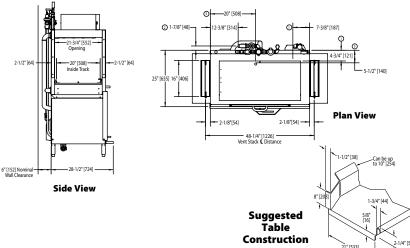

| MD44 with 40° F Rise (16kW) Booster | | | | |
|-------------------------------------|--------------|---|--|--|
| Elec. Specs. | Rate Amps | Maximum Supply Ckt. Conductor Ampacity | Maximum Overcurrent Protective Device | |
| 208/60/3 | 97 | 125 | 125 | |
| 240/60/3 | 86 | 110 | 110 | |
| 480/60/3 | 44 | 60 | 60 | |

Booster Heater Only

| 40 F Rise, 16KW | | | |
|-----------------|--------------|---|--|
| Elec. Specs. | Rate Amps | Maximum Supply Ckt. Conductor Ampacity | Maximum Overcurrent Protective Device |
| 208/60/3 | 44 | 60 | 60 |
| 240/60/3 | 39 | 50 | 50 |
| 480/60/3 | 19 | 25 | 25 |

| MD44 with 70° F Rise (27kW) Booster | | | |
|-------------------------------------|--------------|---|--|
| Elec. Specs. | Rate Amps | Maximum Supply Ckt. Conductor Ampacity | Maximum Overcurrent Protective Device |
| 208/60/3 | 128 | 150 | 150 |
| 240/60/3 | 113 | 125 | 125 |
| 480/60/3 | 57 | 70 | 70 |

Booster Heater Only

| 70° F Rise, 27kW | | | |
|------------------|--------------|---|--|
| Elec. Specs. | Rate Amps | Maximum Supply Ckt. Conductor Ampacity | Maximum Overcurrent Protective Device |
| 208/60/3 | 75 | 90 | 90 |
| 240/60/3 | 65 | 80 | 80 |
| 480/60/3 | 33 | 40 | 40 |