

model F-14

Multi-Purpose Counter-Top Ware Washer

**Ideally suited for smoothie and ice-cream shops, small spaces, counter-top bars,
mobile carts, food courts, lounges, boats, caterers, dental offices,
day-care operators, guest houses, room service, espresso bars,
kiosks, laboratories and much more!!**



***... or as a
Dishwasher***

Accessory No. 30037,
6-place insert for plates
up to 10 1/2"
in diameter



***... or as a
Glasswasher***

Accessory No. 30132,
9-place insert for
glass ware

Note:
Optional accessory
No. 30133,
16-place insert for
glass ware



***... or as an
assorted
Warewasher***

Accessory No. 30035,
15-place insert for
saucers and/or
small plates

Accessory No. 30026
Cutlery Holder



model F-14

PERFORMANCE FEATURES

- Completely automatic wash and rinse cycles including one wash program at 150°F. (65°C.) and one rinse program at 185°F. (85°C.)
- Hourly production: 20 racks of various items OR depending on rack insert used, the following quantities can be washed and rinsed:
 - 4-place insert for Blender Containers - 80 / hr.
 - 9-place insert for Glassware - 180 / hr.
 - 16-place insert for Glassware - 320 / hr.
 - 6-place insert for Dishes - 120 / hr.
- Built-in automatic detergent pump for consistent results each time
- Built-in automatic rinse-additive pump for sparkling final results

TECHNICAL FEATURES

- **Rack capacity:** 13.75" x 13.75" (350 mm. x 350 mm.)
- **Complete operating cycle:** 165 seconds wash and 15 seconds rinse
- **Wash tank capacity:** 2.1 U.S. gallons (8 liters)
- **Wash tank element:** 1400 Watts (1.4 Kw)
- **Wash temperature:** 150°F. (65°C.)
- **Booster capacity:** 0.65 U.S. gallons (2.5 liters)
- **Booster element:** 1400 Watts (1.4 Kw)
- **Rinse (water) temperature:** 185°F. (85°C.)
- **Maximum power absorption:** 1500 Watts (1.5 Kw)
- **Wash motor-pump:** 100 Watts
- **Power supply:** 110 Volt / 60 Hz. (Optional - 220 Volt / 50 Hz.)
- **Amperage:** Single phase - 13.5A
- **Water consumption:** 0.5 U.S. gallons per cycle (1.9 liters)
- **Recommended pressure:** 25 p.s.i. (dynamic)
- **Water inlet connection:** 3/4" male garden hose fitting (hose not included)
- **Drain connection:** 1" ID hose connection (hose not included)
- **Shipping weight:** 72 lbs. (32.8 kg)

CONSTRUCTION FEATURES


- Body, external housing, wash tank, and all chassis components in brushed stainless steel 304 18/10
- Constructed of insulated double-walled panels for low heat and noise emissions
- Unique and compact size for easy placement on a counter top, stand or mobile cart
- Door opening is designed to accept items up to a maximum height of 11"
- Integrated stainless steel booster with insulated lining
- Full width interior scrap screens of durable stainless steel
- Internal screen for protection of motor-pump
- Safety micro-switch on the door to interrupt wash pump action
- Lower revolving wash and rinse arm with lateral upper fixed rinse arms built of fiberglass designed for maximum results and ease of maintenance
- Independently-operated heating elements alternating between the booster and wash tank
- Both alternating heating elements serve to reduce overall energy costs by lowering amperage consumption
- Thermostatic regulated control of both wash and rinse water
- Automatic fill and water level regulation of the wash tank
- Individual thermometer gauges for both wash and rinse temperatures
- Vertical integrated control panel for simple access and technical maintenance

ACCESSORIES

- F-14 supplied with: (1) open rack - 13.75" x 13.75" (350 mm. X 350 mm.)
 - (1) 4-place insert #30131 for blender containers
 - (1) 9-place insert #30132 for glassware
 - (1) 6-place insert #30037 for plates up to 10.5" diameter
 - (1) 15-place insert #30035 for saucers and/or small plates
 - (1) cutlery holder #30026
- **Optional:** 16-place insert #30133 for glassware



ANSI/NSF-3

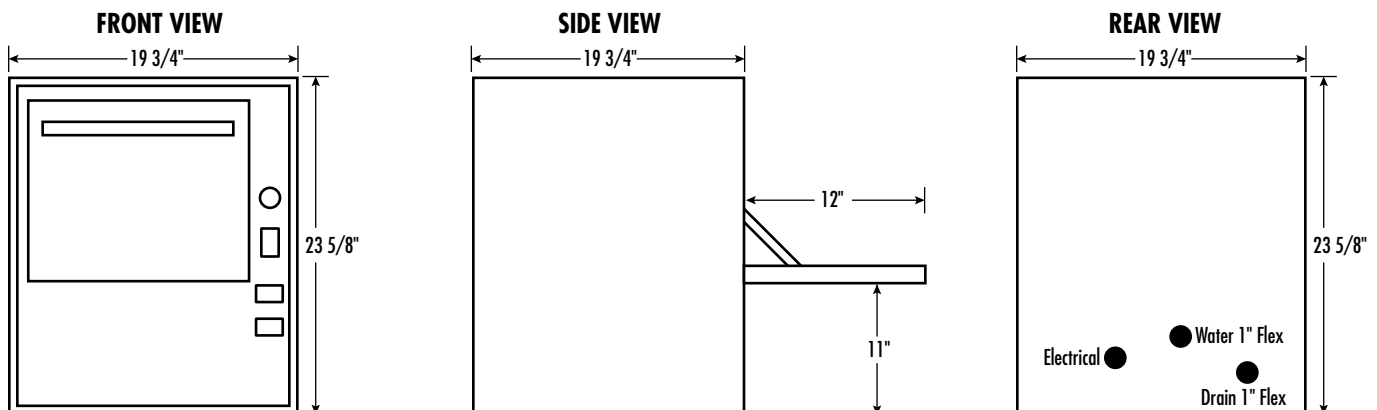

JET TECH SYSTEMS CORP.

TEL: (514) 737-9701 FAX: (514) 342-3854 TOLL FREE: (888) ASK 4 JET jet-tech.com sales@jet-tech.com

In line with our continuing policy on research and product development, we reserve the right to alter specifications without notice.