





PULL OUT CONDENSING UNIT ON SELF CONTAINED



PULL OUT EVAP PAN FOR EASY CLEANING ON SELF CONTAINED



DIGITAL CONTROLLER
WITH HIGH HEAD ALARM
ON SELF CONTAINED

OPEN FRONT DELI CASE

MEDIUM TEMPERATURE
TEMPERED FRONT GLASS
DESIGNED FOR DELI PRODUCTS
AND PACKAGED MEAT

MODELS

KFM - OF - (40,50,60,80,100,120) - S KFM - OF - (40,50,60,80,100,120) - R







REMOTE AND SELF CONTAINED
404A REF - FORCED AIR REFRIGERATION





Tel.: 514.737.9701 / Toll Free: 888.275.4538 Fax: 514.342.3854 / Toll Free: 877.453.8832

sales@mvpgroupcorp.com www.mvpgroupcorp.com






	O.A. CASE ELECTRICAL - 115 VOLT								WEIGHT
三	MODELS	LENGTH	TEMP	COMPRESSOR		FANC	EVAP	TOTAL	LBS
LF CONTAINE		INCHES		F.L.A.	L.R.A.	FANS	PAN	AMPS	
	KFM-OF-40-S	40-3/8	32/40 F	10.5	40	.77	3.3	14.6	284
	KFM-OF-50-S	52-1/8	32/40 F	8.4	41	.77	3.3	12.5	322
	KFM-OF-60-S	60	32/40 F	8.4	41	.93	3.3	12.6	366
	KFM-OF-80-S	77-1/2	32/40 F	9.9	49	1.54	3.3	14.7	452
SE	KFM-OF -100-S	101-1/8	32/40 F	12.9	64	1.54	3.3	17.7	567
	KFM- OF-120-S	117	32/40 F	12.9	64	1.86	3.3	18.0	681

				115		
		O.A.	CASE	VOLTS		WEIGHT
	MODELS	LENGTH	TEMP	TOTAL	B.T.U.	LBS
끧		INCHES		AMPS		
	KFM-OF-40-R	40-3/8	32/40 F	.32	2194	229
Σ	KFM-OF-50-R	52-1/8	32/40 F	.32	2859	267
RE	KFM-OF-60-R	60	32/40 F	.48	3260	311
	KFM-OF-80-R	77-1/2	32/40 F	.64	4209	419
	KFM-OF-100-R	101-1/8	32/40 F	.64	4845	512
	KFM-OF-120-R	117	32/40 F	.96	6357	615

THESE CASES ARE DESIGNED TO OPERATE USING R404A REFRIGERANT B.T.U.'S CALCULATED AT +14° F EVAP AND 90° F AMBIENT CASES ENGINEERED TO OPERATE AT 750 F AND 55% RH ** ON REMOTE CASES - IF NO FLOOR DRAIN IS PROVIDED -

AN EVAPORATIVE DRAIN PAN MUST BE ORDERED ADD 3.3 AMPS WHEN USING A PAN

O.A. DIMENSIONS INCLUDE (2) ENDS - EACH 1-1/2"

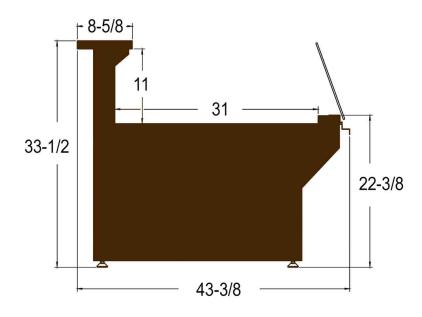



STANDARD FEATURES

- INSULATION INJECTED FOAM
- INTERIOR PVC COATED STEEL- GRAY
- EXTERIOR PVC COATED STEEL-SILVER
- **ENDS-FOAMED BLACK POLYSTYRENE**
- CORD AND PLUG
- CASES ARE MULTIPLEXIBLE
- DEFROST AND TEMPERATURE REGULATED BY A DIGITAL CONTROLLER
- REMOVABLE EVAPORATIVE PAN FOR EASY CLEANING ON S/C ONLY
- PULL-OUT CONDENSING UNIT -ON S/C ONLY
- ADJUSTABLE FEET
- ETL LISTED TO UL471 AND SANITATION CLASSIFIED TO NSF7

OPTIONAL FEATURES

- CASTERS ADD 4-3/8" TO HEIGHT
- ADJUSTABLE STAINLESS STEEL LEGS-FROM 5-1/8" TO 7-5/8"
- OTHER COLORS AVAILABLE
- STAINLESS STEEL EXTERIOR
- **EVAPORATIVE PAN FOR REMOTE CASES**
- WHITE APOXY BI-LEVEL WIRE RACKS
- **CUTTING BOARD**
- (2) OR (3) LEVEL STEP SHAM
- KNIFE SUPPORT
- SCALE STAND WITH RECEPTACLE

WARRANTY

ONE YEAR PARTS AND LABOR WITH FOUR ADDITIONAL YEARS COMPRESSOR (PARTS ONLY)