


HYDRA KOOL

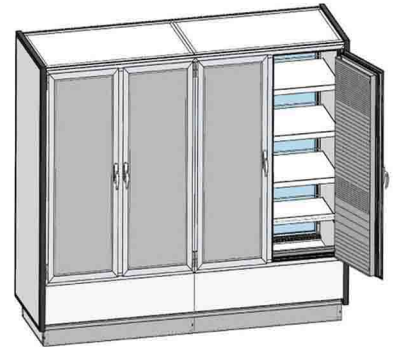

REAR LOADING

HIGH VOLUME GRAB-N-GO CASE

**MEDIUM TEMPERATURE
REMOTE CONDENSING UNIT
2, 3, 4, 5 AND 6 DOORS
FRONT AND REAR LOADING**

MODELS

KGV - MR - (2, 3, 4, 5, 6) - R



Intertek



Intertek

**REMOTE CONDENSING UNIT REQUIRED
404A REF - FORCED AIR REFRIGERATION**

AQ
AUTOQUOTES

MVP
GROUP

Tel.: 514.737.9701 / Toll Free: 888.275.4538

Fax: 514.342.3854 / Toll Free: 877.453.8832

sales@mvpgroupcorp.com

www.mvpgroupcorp.com

KOOL-IT

REMOTE	MODEL	NO. OF DOORS	O.A LENGTH INCHES	CASE TEMP	115 VOLTS TOTAL AMPS	B.T.U.	WEIGHT
	KGV-MR-2-R	2-23-1/2"	51-1/2"	32/40 F	2.2	908	639
	KGV-MR-3-R	3-23-1/2"	75-3/8"	32/40 F	2.8	1362	899
	KGV-MR-4-R	4-23-1/2"	99-3/8"	32/40 F	4.4	1816	1135
	KGV-MR-5-R	5-23-1/2"	123-1/8"	32/40 F	5.0	2370	1237
	KGV-MR-6-R	6-23-1/2"	147"	32/40 F	5.6	2724	1695

THESE CASES ARE DESIGNED TO OPERATE USING R404A REFRIGERANT
 B.T.U.'S CALCULATED AT +14 ° F EVAP AND 90° F AMBIENT
 CASES ENGINEERED TO OPERATE AT 75° F AND 55% RH
 FLOOR DRAINS REQUIRED
 O.A.LENGTH INCLUDES (2) 1-7/8" ENDS

STANDARD FEATURES

- INSULATION - CFC FREE POLYURETHANE FOAM
- INTERIOR - PVC COATED STEEL-GRAY
- EXTERIOR - PVC COATED STEEL-SILVER
- ENDS-FOAMED -BLACK POLYSTYRENE
- CORD AND PLUG - ON 20 AMP OR LESS
- CASES ARE MULTIPLEXIBLE
- LED LIGHTING IN CANOPY AND UNDER ALL SHELVES
- DEFROST AND TEMPERATURE REGULATED BY A DIGITAL CONTROLLER
- ADJUSTABLE SHELVES
- ADJUSTABLE FEET
- PRODUCT STOPS ON ALL SHELVES
- ETL LISTED TO UL471 AND SANITATION CLASSIFIED TO NSF7

OPTIONAL FEATURES

- OTHER COLORS AVAILABLE
- STAINLESS STEEL EXTERIOR
- STAINLESS STEEL INTERIOR
- ADDITIONAL SHELVES
- PRICE TAG MOULDING

WARRANTY

ONE YEAR PARTS AND LABOR WITH FOUR ADDITIONAL YEARS COMPRESSOR (PARTS ONLY)

