


HYDRA KOOL

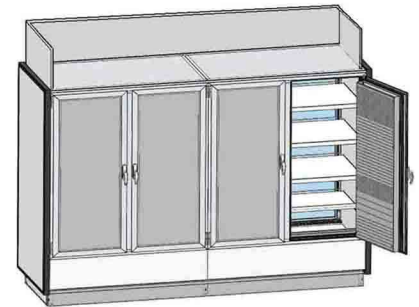

REAR LOADING

HIGH VOLUME GRAB-N-GO CASE

**MEDIUM TEMPERATURE
SELF CONTAINED
2, 3, 4, 5 AND 6 DOORS
FRONT AND REAR LOADING**

MODELS

KGV - MR - (2, 3, 4, 5, 6) - S



**SELF CONTAINED
404A REF - FORCED AIR REFRIGERATION**



Tel.: 514.737.9701 / Toll Free: 888.275.4538
Fax: 514.342.3854 / Toll Free: 877.453.8832
sales@mvpgroupcorp.com www.mvpgroupcorp.com



SELF CONTAINED	MODEL	NO. OF DOORS	O.A LENGTH INCHES	CASE TEMP	ELECTRICAL			WEIGHT	
					COMPRESSOR				LIGHTS AND FANS 115 VOLTS
					115 VOLTS				
					H.P	F.L.A.	L.R.A.		
KGV-MR-2-S	2-23-1/2"	51-1/2"	32/40 F	1/2	8.4	41	2.2	706	
KGV-MR-3-S	3-23-1/2"	75-3/8"	32/40 F	1/2	9.9	49	2.8	966	
KGV-MR-4-S	4-23-1/2"	99-3/8"	32/40 F	(2) 1/2	(2) 8.4	(2) 41	(2) 2.2	1268	
KGV-MR-5-S	5-23-1/2"	123-1/8"	32/40 F	(2) 1/2	(1) 8.4 + (1) 9.9	(1) 41 + (1) 49	(1) 2.2 + (1) 2.8	1568	
KGV-MR-6-S	6-23-1/2"	147"	32/40 F	(2) 1/2	(2) 9.9	(2) 49	(2) 2.8	1828	

THESE CASES ARE DESIGNED TO OPERATE USING R404A REFRIGERANT
 B.T.U.'S CALCULATED AT +14 °F EVAP AND 90°F AMBIENT
 CASES ENGINEERED TO OPERATE AT 75°F AND 55% RH
 FLOOR DRAINS REQUIRED
 O.A.LENGTH INCLUDES (2) 1-7/8" ENDS

STANDARD FEATURES

- INSULATION - CFC FREE POLYURETHANE FOAM
- INTERIOR - PVC COATED STEEL-GRAY
- EXTERIOR - PVC COATED STEEL-SILVER
- ENDS-FOAMED -BLACK POLYSTYRENE
- CORD AND PLUG - ON 20 AMP OR LESS
- CASES ARE MULTIPLEXIBLE
- LED LIGHTING IN CANOPY AND UNDER ALL SHELVES
- PRODUCT STOPS ON ALL SHELVES
- DEFROST AND TEMPERATURE REGULATED BY A DIGITAL CONTROLLER
- ADJUSTABLE SHELVES
- ADJUSTABLE FEET
- ETL LISTED TO UL471 AND SANITATION CLASSIFIED TO NSF7

OPTIONAL FEATURES

- OTHER COLORS AVAILABLE
- STAINLESS STEEL EXTERIOR
- STAINLESS STEEL INTERIOR
- ADDITIONAL SHELVES
- PRICE TAG MOULDING

WARRANTY

ONE YEAR PARTS AND LABOR WITH FOUR ADDITIONAL YEARS COMPRESSOR (PARTS ONLY)

