

Job: \_\_\_\_\_

Item: \_\_\_\_\_

Quantity: \_\_\_\_\_

**New Age Industrial Corp., Inc.**

PO Box 520 • 16788 US Hwy 36 • Norton, Kansas 67654

Phone: 800-255-0104 • Fax: (877)-877-7687 • [www.NewAgeIndustrial.com](http://www.NewAgeIndustrial.com)

## “Z” Type Nesting Racks

### Virtually maintenance free

- All welded construction insures the maximum strength and stability of each rack.
- Shipped assembled for immediate use.
- Supporting cross braces have gussets securely welded into place to prevent “racking”.

### “Worry Free” Handling

- Specially designed to hold trays by the bottom insuring equal load distribution for easy, “worry free” handling.
- Heavy duty aluminum tube and angle slides maximize strength and durability.

### Easy to Maneuver

- Equipped with four 5” heavy duty platform type casters, these all welded aluminum carts are built to be pushed around.
- Non-marking wheels protect floors and minimize noise.

### Sanitary

- Each unit is all welded with all seams fully welded and sealed providing a smooth, easy to clean surface.
- No cracks or crevices to trap dirt!

### Guaranteed To Last



- Five-Year Guarantee against material defects and workmanship.
- Lifetime Guarantee against rust and corrosion.



#1330Z

#1331Z

6 “Z” Racks = 14.9 sq/ft • 6 Standard Racks = 22.4 sq/ft

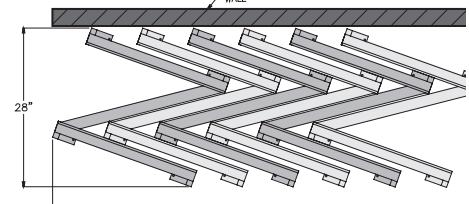

NSF

*This information is for general sales and engineering use only. New Age Industrial reserves the right to modify or make changes at any time without notice to materials and specifications.*



Distributed by:

Job: \_\_\_\_\_

Item: \_\_\_\_\_

Quantity: \_\_\_\_\_

**New Age Industrial Corp., Inc.**  
 PO Box 520 • 16788 US Hwy 36 • Norton, Kansas 67654  
 Phone: 800-255-0104 • Fax: (877)-877-7687 • [www.NewAgeIndustrial.com](http://www.NewAgeIndustrial.com)

## “Z” Type Nesting Racks

**MATERIAL:** Hi-tensile, corrosion resistant, rust proof, primary extruded aluminum, Type 6463-T5 alloy.

**CONSTRUCTION:** All heli-arc welded with all seams welded and sealed (no rivets).

**SIDES:** Each side had two vertical posts of 1” x 1” x .070 wall tube. Welded to each side are angle runners of 1-1/4” x 1-5/8” x .100 wall aluminum angle, spaced on 2” or 3” centers.

**HORIZONTAL “Z” SUPPORTS:** Three “Z” support constructed of 1” x 2” tube, welded into a “Z” shaped unit.



**CORNER GUSSETS:** Gussets of 1-1/2” x 1-1/2” x 5/8” thick angle are welded to the inside angles (bottom side) where horizontal cross bracing meets vertical uprights.

*Note: Each gusset requires 4-1/2” of weld.*

**BASE:** A “Z” support frame with pre-tapped plates welded to each corner.

**CASTERS:** Platform type, 5” diameter wheel, full swivel design with sealed ball bearing axle. Wheel material is non-marking polyurethane.

**NSF Certified.**

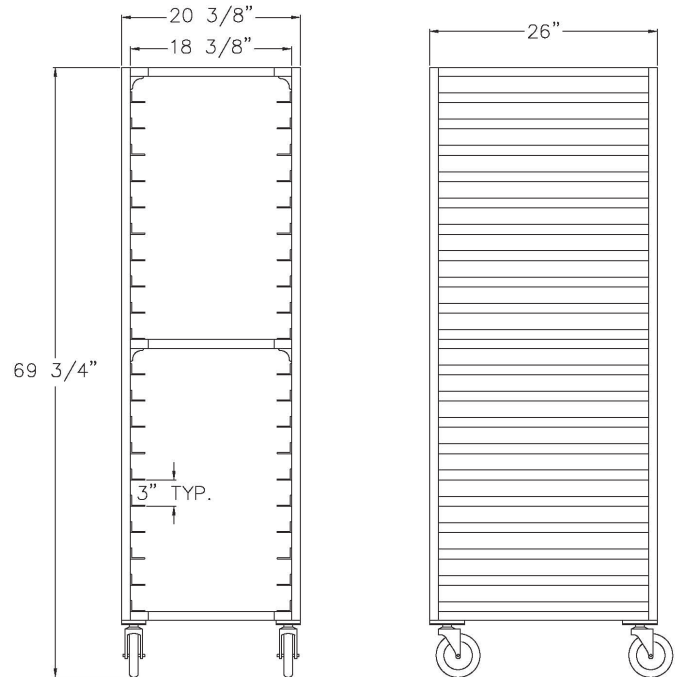

**#1331Z**

Model No.	Size W-H-D	Pan Cap.	Runner Spacing	Ship Wt.
1331Z	20-1/2" x 69-3/4" x 26"	20	3"	68#
1330Z	20-1/2" x 69-3/4" x 26"	30	2"	86#

Four 5” platform type casters (#C450).  
 Designed to accommodate 13” x 18”, 14” x 18” and 18” x 26” pans.

**OPTIONS:**

- Caster Locks (2)** -- Add “CL(B)” suffix to model #.
- Medical Casters (4)** -- Add “MD” suffix to model #.
- Vertical Bumpers (4)** -- Add “VB” suffix to model #.

Distributed by:

*This information is for general sales and engineering use only. New Age Industrial reserves the right to modify or make changes at any time without notice to materials and specifications.*

