

## ENCLOSED MOBILE SECURITY CABINET

## **SPECIFICATIONS**

**MATERIAL:** Hi-tensile, corrosion resistant, rust proof, primary extruded aluminum, Type 6463-T5 alloy and 5052 H32-34 sheet aluminum.

CONSTRUCTION: All heli-arc welded.

**SHELVES:** Unit equipped with two shelves constructed of  $1-\frac{1}{2}$ " x  $1-\frac{1}{2}$ " .070" extruded aluminum tube with  $1-\frac{1}{4}$ " x  $2-\frac{1}{4}$ " x .100

thick T-Bar's welded perpendicular to the length.

**BASE:** 1/6" Sheet base, reinforced with 1-1/4" x 1-1/2" x .070" wall tube; 2-3/4" x 4" x 3/6" thick pre-tapped caster plates are welded to the base.

**DOORS & SIDES:** Constructed of 1/8" Sheet, Door is reinforced with 1"x1"x.070" wall tube; Doors and Sides have louvers to create airflow. Doors have lockable latch to increase security.


**BACK:** Solid <sup>1</sup>/<sub>6</sub>" Sheet back notched to allow for shelves.

**CASTERS:** Four 5" diameter casters, 1-¼" wide with polyurethane tire; two swivel and two rigid. Load capacity = 290# each.





Phone: 800-255-0104 Fax: 877-877-7687 www.newageindustrial.com sales@newageindustrial.com New Age Industrial reserves the right to modify or make changes at any time without notice to materials and specifications.

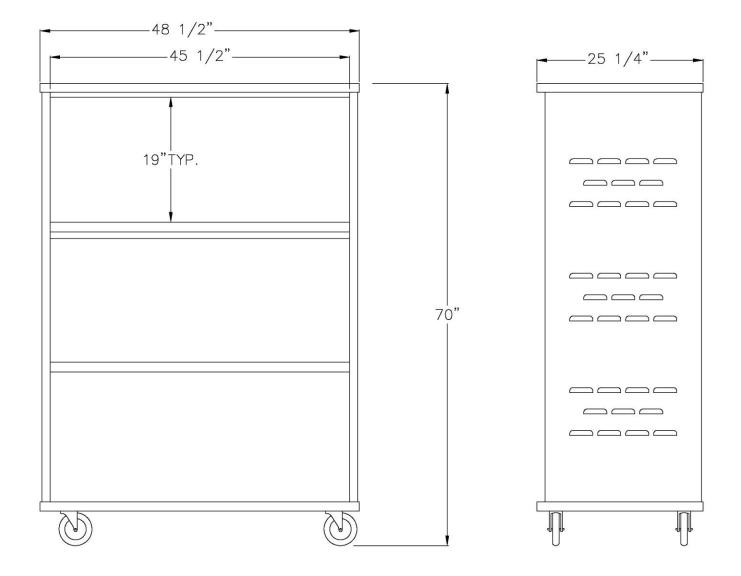

## MODEL #98167

Model No.	Size-W	Size-H	Size-D	Wt.
98167	48 1/2"	70"	25 1/4"	170#



Phone: 800-255-0104 Fax: 877-877-7687 www.newageindustrial.com sales@newageindustrial.com New Age Industrial reserves the right to modify or make changes at any time without notice to materials and specifications.