

Job: \_\_\_\_\_

Item: \_\_\_\_\_

Quantity: \_\_\_\_\_

**New Age Industrial Corp., Inc.**

PO Box 520 • 16788 US Hwy 36 • Norton, Kansas 67654

Phone: 800-255-0104 • Fax: (877)-877-7687 • [www.NewAgeIndustrial.com](http://www.NewAgeIndustrial.com)

## “Z” Type Nesting Racks

### Virtually maintenance free

- All welded construction ensures the maximum strength and stability of each rack.
- Shipped assembled for immediate use.
- Supporting cross braces have gussets securely welded into place to prevent “racking”.

### “Worry Free” Handling

- Specially designed to support trays by the bottom, not just the lip, ensuring equal load distribution for easy, “worry-free” handling.
- Heavy duty aluminum tube and angle slides maximize strength and durability.

### Easy to Maneuver

- Equipped with four 5” heavy duty platform type casters, these all welded aluminum carts are built to be pushed around.
- Non-marking wheels protect floors and minimize noise.

### Sanitary

- All seams are fully welded and sealed providing a smooth, easy to clean surface.
- No cracks or crevices to trap dirt!

### Guaranteed To Last



- Five-Year Guarantee against material defects and workmanship.
- Lifetime Guarantee against rust and corrosion.



#1330Z


#1331Z

6 “Z” Racks = 14.9 sq/ft • 6 Standard Racks = 22.4 sq/ft

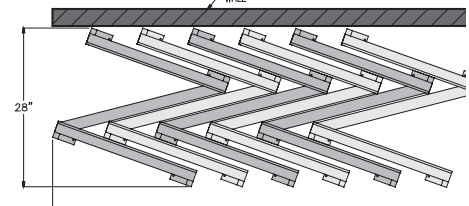

NSF

*This information is for general sales and engineering use only. New Age Industrial reserves the right to modify or make changes at any time without notice to materials and specifications.*



Distributed by:

Job: \_\_\_\_\_

Item: \_\_\_\_\_

Quantity: \_\_\_\_\_

**New Age Industrial Corp., Inc.**  
 PO Box 520 • 16788 US Hwy 36 • Norton, Kansas 67654  
 Phone: 800-255-0104 • Fax: (877)-877-7687 • [www.NewAgeIndustrial.com](http://www.NewAgeIndustrial.com)

## “Z” Type Nesting Racks

**MATERIAL:** Hi-tensile, corrosion resistant, rust proof, primary extruded aluminum, Type 6463-T5 alloy.

**CONSTRUCTION:** All heli-arc welded with all seams welded and sealed (no rivets).

**SIDES:** Each side had two vertical posts of 1" x 1" x .070" wall tube. Welded to each side are angle runners of 1¼" x 1⅝" x .100" wall aluminum angle, spaced on 2" or 3" centers.

**HORIZONTAL “Z” SUPPORTS:** Three 1" x 2" tubes, welded into a “Z” shaped unit.



**CORNER GUSSETS:** Gussets of 1½" x 1½" x ⅝" thick angle are welded to the inside angles (bottom side) where horizontal cross bracing meets vertical uprights.

*Note: Each gusset requires 4-½" of weld.*

**BASE:** A “Z” support frame with pre-tapped caster plates welded to each corner.

**CASTERS:** Platform type, 5" diameter wheel, full swivel design with sealed ball bearing axle. Wheel material is non-marking polyurethane.

NSF Certified.

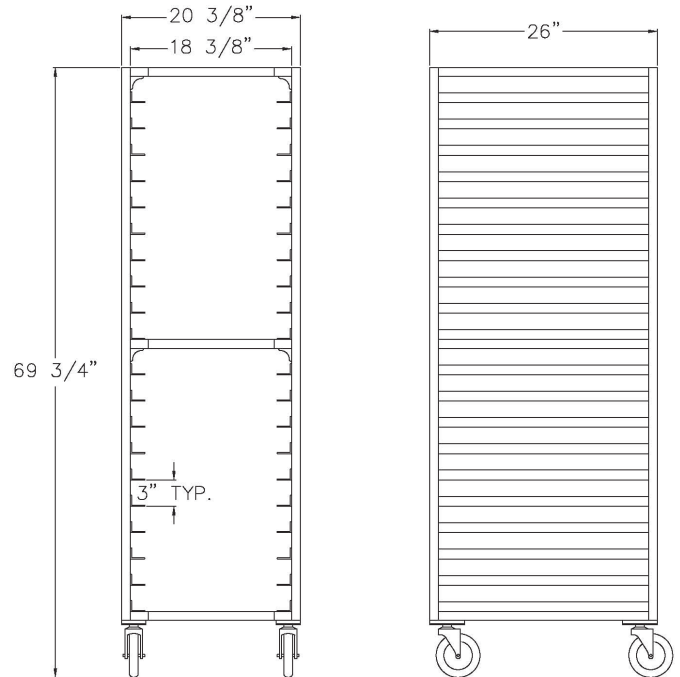

**#1331Z**

Model No.	Size W-H-D	Pan Cap.	Runner Spacing	Ship Wt.
<b>FULL-SIZE NESTING “Z” PAN RACKS</b>				
1331Z	20⅜" x 69¾" x 26"	20	3"	68#
1330Z	20⅜" x 69¾" x 26"	30	2"	86#
<b>ROLL-IN NESTING “Z” PAN RACKS</b>				
97379*	20⅜" x 64¾" x 26"	11	5"	60#
99866*	20⅜" x 69¾" x 26"	18	3"	64#

Four 5" platform type casters (#C450).  
 Designed to accommodate 13" x 18", 14" x 18" and 18" x 26" pans.  
 \* Not NSF Certified.

**OPTIONS:**

- Caster Locks (2)** -- Add "CL(B)" suffix to model #.
- Medical Casters (4)** -- Add "MD" suffix to model #.
- Vertical Bumpers (4)** -- Add "VB" suffix to model #.

Distributed by:

*This information is for general sales and engineering use only. New Age Industrial reserves the right to modify or make changes at any time without notice to materials and specifications.*

