


NOR-LAKE INCORPORATED
727 Second Street
P.O. Box 248
Hudson, Wisconsin 54016

800-955-5253
715-386-2323
800-388-5253 PARTS
715-386-6149 FAX
www.norlake.com



FAST-TRAK™ WALK-INS

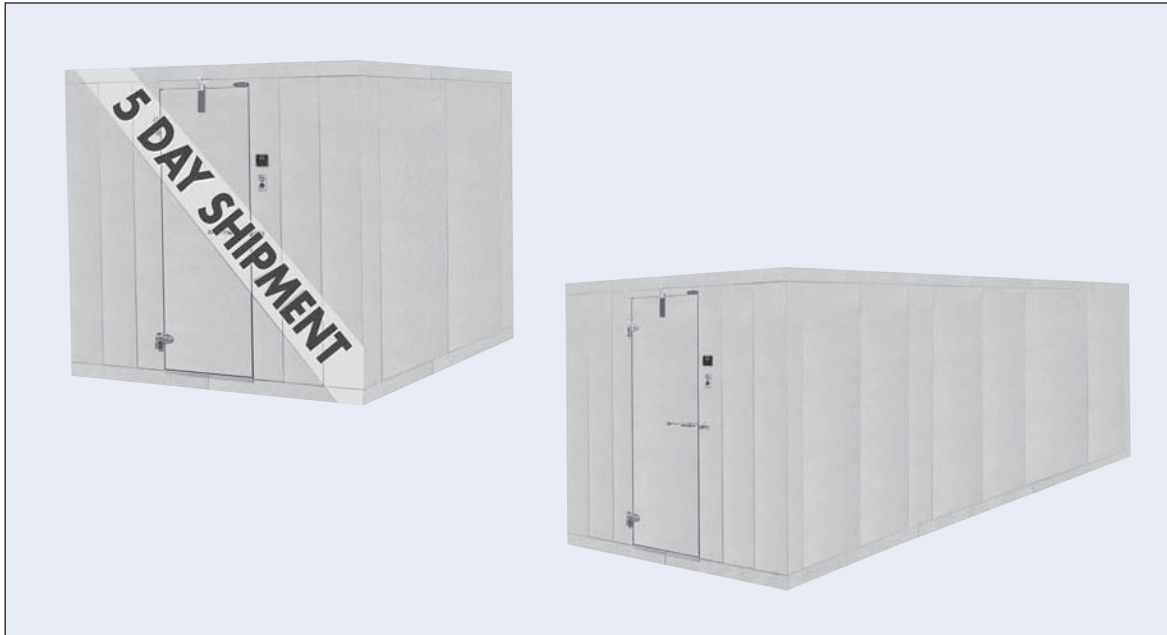

Coolers, Freezers and Combination Cooler/Freezers In Stock for 5 DAY SHIPMENT

STANDARD FEATURES

- Available in Unlimited lengths
- Available in widths of 6', 7', 8', 9', 10', 11' & 12'
- Heights 7'7" and 8'7" combination with floor freezers and less floor coolers with 4-3/8" foam sealers
- Indoor or outdoor models
- Remote Refrigeration Systems
- Temperatures: 38°F, 35°F, -10°F
- Full 4" thick panels foamed-in-place with HFC-134a polyurethane insulation which is CFC and HCFC free
- 26 gauge corrosion resistant stucco embossed temper passed coated steel on all surfaces except interior floor.
- Smooth aluminum interior floor (on models with floor)
- Floorless models supplied with NSF listed vinyl sealers
- 26", 30" or 36" wide, self-closing doors with Fast-Trak™ frame
- Deadbolt locking handle with independent key/padlock feature and inside safety release
- Two heavy duty cam-lift hinges per door, top hinge field adjustable with locking set screw
- Spring actuated door closer
- Magnetic gasket
- Digital thermometer
- Floor double sweep gasket
- Perimeter door heater wire
- Vapor-proof light
- Switch and pilot light
- NSF, UL flame spread 25 on all panels; UL and CSA electrical listing on door sections
- UL and CSA electrical listing on refrigeration systems
- City of New York (MEA) listed
- City of Houston listed
- LA County listed

- California State listed
- Oregon State listed
- USDA accepted
- Registered by UL to ISO 9001:2000
- **Fifteen year panel warranty**
- 18 month labor warranty
- One year parts warranty

OPTIONAL FEATURES

- Outdoor membrane roof systems
- Door rain hoods
- Interior and/or exterior 30" high stainless steel door kick plates
- Exterior ramp for floor models
- Interior ramps (30" & 36" wide) for floor models
- Leak detector/alarm (may be a requirement in some areas)
- Extra vapor-proof lights (shipped loose)
- Secure Guard™ Lock high security locking system
- Strip curtains (shipped loose)
- Non-skid floor strips (shipped loose)
- Shelving systems
- 1-3/8" tile and grout screed for floorless applications



Nor-Lake, Inc.
Registered to ISO 9001:2000
File No. A3204

FAST-TRAK™
WALK-INS


SPECIFICATION

GUIDE

FAST-TRAK™ WALK-INS

REMOTE REFRIGERATION SYSTEMS

5 DAY SHIPMENT

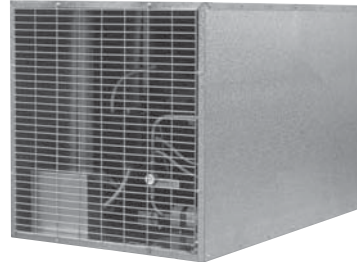

Remote Refrigeration Systems*

- Balanced Remote Refrigeration Systems
- In stock for 5 day shipment
- May be ordered uncharged for field installation or...
- Pre-charged with pre-charged line lengths from 5' to 50'
- Pre-charged systems include quick connect fittings for easy installation
- All condensing units are assembled on a heavy duty platform
- Systems include an all weather hood and outdoor controls for -20°F ambient installations

Fast-Trak™ Remote Refrigeration Systems (Field Piped & Field Charged)

38°F & 35°F Operation

Series	Model No.	Voltage	Refrigerant	Condensing unit MCA	Evaporator coil MCA
50	NAWA50RLO-WB	115/60/1	R-22	10.9	2.0
75	NAWA75RL4-WB	115/208/230/60/1	R-22	10.1	2.0
100	NAWA100RL4-WB	115/208/230/60/1	R-22	9.9	4.0
150	NAWA150RL4-WB	115/208/230/60/1	R-22	14.2	4.0
200	NAWA200RL4-WB	115/208/230/60/1	R-22	19.2	6.0

-10°F Operation

75	LAWD75RL4-WB	208/230/60/1	R-404A	14.9	4.4
100	LAWD100RL4-WB	208/230/60/1	R-404A	17.2	7.0
150	LAWD150RL4-WB	208/230/60/1	R-404A	26.2	7.0
200	LAWD200RL4-WB	208/230/60/1	R-404A	26.7	8.7

Option: Pre-charged line sets from 5' to 50'

*System sizes limited to models listed above

NOR-LAKE, INCORPORATED

727 Second Street
Hudson, Wisconsin 54016
800-955-5253
715-386-2323
800-388-5253 PARTS
715-386-6149 FAX
© 2005 Nor-Lake Inc.
www.norlake.com
10/05 101627



WALK-IN SPECIFICATIONS

Fast-Trak™ walk-ins are built of modular panels, and are insulated with foamed-in-place HFC-134a polyurethane insulation which is CFC and HCFC free. Each panel is designed to ensure ease of installation, long term reliability and high insulating efficiency.

A. All panels are manufactured with male and female mating rails to ensure proper alignment during installation. The polyurethane insulation wraps around the return bend metal seams on both sections to create a lightweight panel of exceptional strength and durability. All panels are a full four (4) inches thick and provide a superior insulating value.

B. The foamed-in-place cam locking fasteners ensure an airtight seal for maximum energy efficiency.

C. Fast-Trak™ panel gaskets around the outer perimeter of the panel are continuous, without cuts or breaks at corners. The Nor-Lake patented gasket design provides a foamed-in-place gasket as an integral part of the panel. Gaskets cannot fall off or pull off during shipment or installation.

D. Panels lock together tightly to assure an energy efficient walk-in.


E. Edge caps for ends of floor and ceiling panels are foamed-in-place rather than overlapped or mechanically fastened. Edge caps cannot come loose, and they stay in place through the life of the walk-in.

F. Panel Finishes:


Interior and exterior complete to be 26 gauge corrosion resistant stucco embossed temper passed coated steel. Models supplied with a floor will include a smooth aluminum interior floor surface.

Insulation


Panels to be four (4) inches thick, metal clad and foamed-in-place with HFC-134a polyurethane insulation which is CFC and HCFC free.




A.




B.




C.



D.




E.




F.

FAST-TRAK™ WALK-INS AVAILABLE IN BOTH SINGLE COMPARTMENT WALK-INS OR COOLER/FREEZER COMBINATIONS

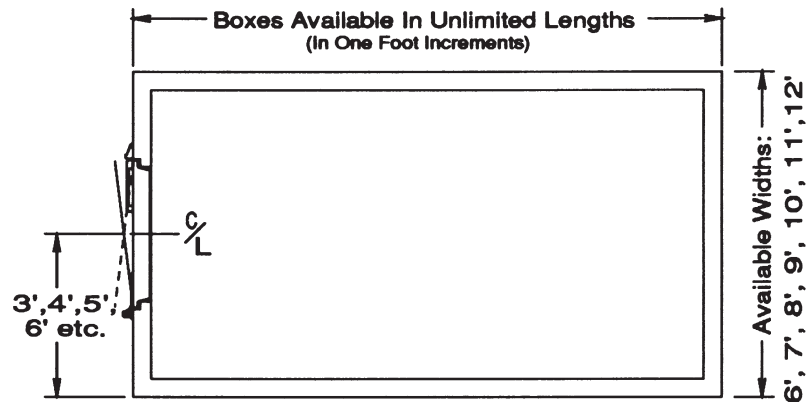

Note: The Walk-in Door Can Be Located On Any Wall.

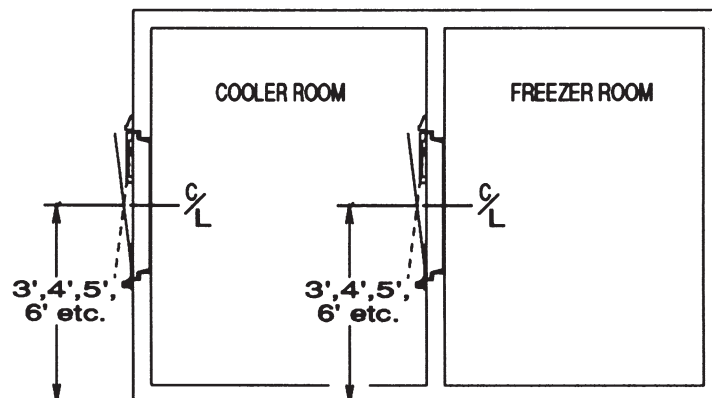

Note: The Partition Door Must Open Into The 35 Deg Compartment.

DOOR

Door sections manufactured at Nor-Lake are factory tested to assure proper fit, performance and alignment. All doors feature a stepped profile design that serves as a barrier to air flow which results in an energy efficient door system.

Each Fast-Trak™ walk-in compartment is equipped with a 26", 30" or 36" wide x 78" high door. The door is self-closing, flush mounted, infitting and constructed to incorporate heavy duty, molded ABS breaker which is permanently foamed-in-place.

Doors are available with right or left side hinges and include two cam-lift hinges, top hinge field adjustable with locking set screw, magnetic gasket, double sweep gasket, spring actuated door closer, NL 9800 deadbolt locking handle with independent key/padlock feature and inside safety release. The doors are prehung in a four foot wide frame panel which is equipped with replaceable perimeter heater wire, magnetic stainless steel trim, 2-1/2" digital thermometer, vapor-proof light fixture and switch with exterior pilot indicator light.

The door section is completely pre-wired within concealed conduit inside the door frame panel. 115/60/1 electrical is field wired to a junction box which is surface mounted on the interior frame above the vapor proof light fixture.


Hinges and door handle are mounted to 1/2" synthetic insulated tapping plates. Each door section is complete with a heavy gauge galvanized steel heated threshold.

FLOOR CONSTRUCTION

Floor panels (when supplied) are similar in construction to the wall panels except they are made to withstand uniformly distributed floor loads of up to 800 pounds per square foot. The interior floor metal is smooth aluminum.

Floorless models, are supplied with a patented vinyl floor sealer to stop conductivity at floor level. This unique sealer sits flat on existing floors and fits tightly against the interior/exterior wall panels. The walk-in wall panel is supported on the shoulder of the sealer so the foam edge is free of compressing weight. The vinyl floor sealer is NSF listed.

DOORS FEATURE A STEPPED PROFILE DESIGN

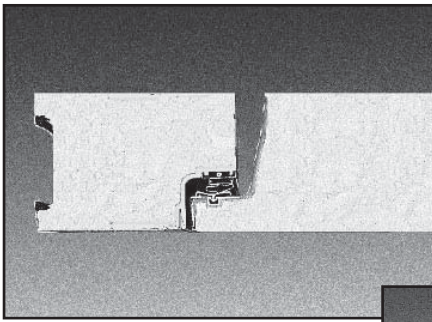


VAPOR PROOF LIGHT FIXTURE



DEADBOLT LOCKING HANDLE

NL 9800 deadbolt locking handle with independent key/padlock feature and inside safety release.

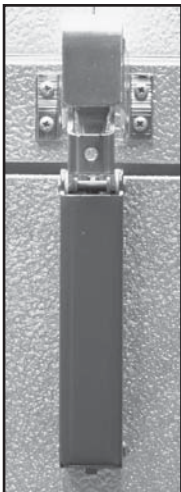

SPRING ACTUATED DOOR CLOSER

FLOORLESS MODELS ARE SUPPLIED WITH A PATENTED VINYL FLOOR SEALER.

