

NOR-LAKE, INCORPORATED
727 Second Street
P.O. Box 248
Hudson, Wisconsin 54016

800-955-5253
715-386-2323
866-961-5253 Parts
800-388-5253 Service
715-386-6149 FAX
www.norlake.com

NORLAKE®



ICE CREAM STORAGE - DIPPING CABINETS



FF104

PROJECT:

ITEM NUMBER:

MODEL NUMBER:

SPECIFICATIONS FOR: FF044, FF074, FF104, FF114, FF154, FF204, FF264

- **Exterior Finish:** 24 gauge painted textured white finish with seamless stainless steel top. Stainless steel “flap lids”
- **Interior Finish:** Galvanized steel interior with cold wall evaporator.
- **Insulation:** 2-1/4” foamed-in-place “zero ODP” urethane insulation
- **Hardware:** Leveling legs to correct for unlevel flooring situations; Floor drain with hose fitting; anti-condensate door heaters under stainless top cap
- **Electrical:** 115 volt, 60HZ, 1 phase with cord and plug
- **Refrigeration:** Self-contained, factory tested refrigeration system. Hermetic condensing unit. FF264 model has a semi-hermetic condensing unit. Temperature range: 10°F to -10°F (-12°C to -23°C).
- **Approvals:** UL, C-UL, NSF listed (model FF264 is not C-UL listed)

STANDARD FEATURES

- Anti-condensate door heaters
- Galvanized steel interior
- 24 gauge painted textured white finish exterior
- Seamless stainless steel top
- Stainless steel lids hinged with handles
- 12 months parts and labor warranty
- 5 year compressor warranty
- UL, C-UL, NSF listed (model FF264 is not C-UL listed)

OPTIONAL FEATURES

- Additional lids
- Casters
- Dipper well
- Legs
- Lid locks (less lock)
- Load level shelves
- Stainless steel exterior finish (SVS)



Nor-Lake, Inc.
Registered to ISO 9001:2008
File No. 10001816


* Most options are available two weeks from receipt of order. Please contact us for specific questions.

** C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.


** UL Sanitation is Underwriters Laboratories Sanitation Mark which indicates that UL has tested the equipment to applicable NSF Standards.

ICE CREAM STORAGE - DIPPING CABINETS


SPECIFICATION
GUIDE

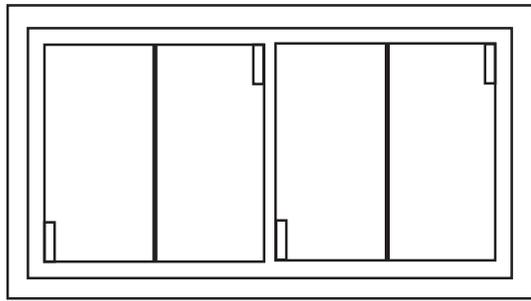

TOP VIEW

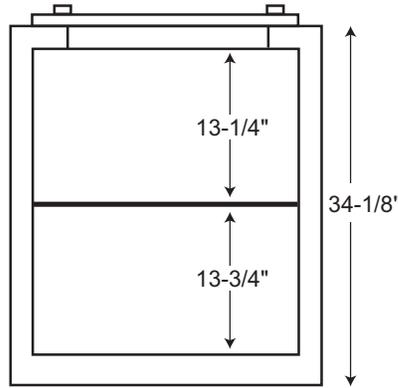

SIDE VIEW

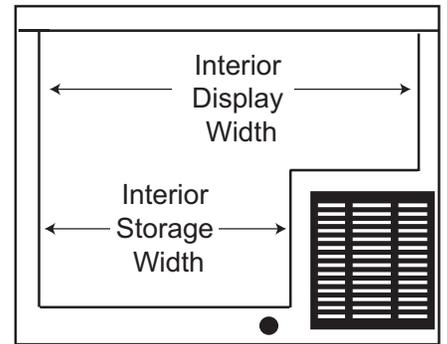

FRONT VIEW

SPECIFICATIONS

Model	FF044	FF074	FF104	FF114	FF154	FF204	FF264
<i>Crated Weight (lbs.)</i>	195	220	280	275	365	430	490
<i>Interior Height</i>	27"	27"	27"	27"	27"	27"	27"
<i>Interior Display Width</i>	27-1/4"	26"	49-3/8"	38-3/8"	49-3/8"	62"	80"
<i>Interior Storage Width</i>	14-1/4"	13"	36-3/8"	25-3/8"	36-3/8"	49"	67"
<i>Can Capacity Display</i>	3	5	6	8	11	14	18
<i>Can Capacity Storage</i>	1	2	4	5	8	11	15
<i>Interior Depth</i>	16-1/2"	25-1/2"	16-1/2"	25-1/2"	25-1/2"	25-1/2"	25-1/2"
<i>Overall Height</i>	34-1/8"	34-1/8"	34-1/8"	34-1/8"	34-1/8"	34-1/8"	34-1/8"
<i>Overall Width</i>	31-7/8"	30-5/8"	54"	43"	54"	66-5/8"	84-5/8"
<i>Overall Depth</i>	21-1/8"	30-1/8"	21-1/8"	30-1/8"	30-1/8"	30-1/8"	30-1/8"
<i>Gross Cubage (ft.³)</i>	5.2	7.6	11	12.5	17.3	22	29.1
<i>Number of Casters (optional)</i>	4	4	4	4	4	4	4
<i>Number of Legs (optional)</i>	4	4	4	4	4	4	4
<i>Condensing Unit Size</i>	1/4	1/4	1/4	1/4	1/3	1/3	1/3
<i>Refrigerant</i>	R134a	R134a	R134a	R134a	R134a	R134a	R404A
<i>Electrical Characteristics</i>	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1	115/60/1
<i>Cord and Plug Furnished</i>	Yes						
<i>Maximum Fuse Size</i>	15 Amp						
<i>Nema Plug Configuration</i>	5-15P						
<i>Total Amp Draw</i>	5.7	5.7	5.7	5.7	7.3	7.3	7.5

Specifications subject to change without notice.

* Can capacities in 9-1/2", 3 gallon cans.



Revision Date: 06/12
 © 2012 NOR-LAKE, INC.
 Printed in the U.S.A.
 Part Number: 144102

