

NOR-LAKE, INCORPORATED
 727 Second Street
 P.O. Box 248
 Hudson, Wisconsin 54016

800-955-5253
 715-386-2323
 866-961-5253 Parts
 800-388-5253 Service
 715-386-4291 FAX
 www.norlake.com



ADVANTEDGE™ SHALLOW SOLID DOOR BACK BAR REFRIGERATORS



PROJECT:

 ITEM NUMBER:

 MODEL NUMBER:

SOLID DOOR BACK BAR REFRIGERATORS

SPECIFICATIONS FOR: NLBB48N, NLBB60N, NLBB72N

- **Finish:** Heavy duty stainless steel top and black vinyl coated steel exterior front, sides and back. Galvanized steel interior walls with stainless steel floor.
- **Insulation:** Foamed-in-place 1-1/2" CFC-free polyurethane insulation
- **Hardware:** Solid doors with locks, magnetic door gaskets, plastic breaker strips around door openings to limit the formation of any condensation. Two adjustable epoxy coated shelves per door section standard. Interior LED light.
- **Electrical:** 115 volt, 60 Hz, 1 phase with cord and NEMA 5-15P plug
- **Refrigeration:** Self-contained forced air R-134a capillary tube refrigeration system. Temperature range from +34°F to +38°F. Adjustable temperature control.
- **Approvals:** ETL Sanitation listed, UL, C-UL Safety listed, approved to NSF standard for packaged food products **


STANDARD FEATURES

- Adjustable temperature control
- Black vinyl coated steel front, sides and back exterior
- Epoxy coated flat shelves with clips
- Free flowing air system at all times to ensure uniformly cooled product
- LED interior light
- Slide out condensing unit
- Temperature range: +34°F to +38°F
- ETL Sanitation listed, UL, C-UL Safety listed, approved to NSF standard for pre-packaged food products **
- Warranties: 3 year parts & labor, 5 year compressor


OPTIONAL FEATURES*

- 4" casters
- Floor rack(s)
- Glass door(s)
- Shelves with product guides


*Most options are available one week from receipt of order. Please contact us for specific questions.
 ** C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.
 ** UL Sanitation is Underwriters Laboratories Sanitation Mark which indicates that UL has tested the equipment to applicable NSF Standards.

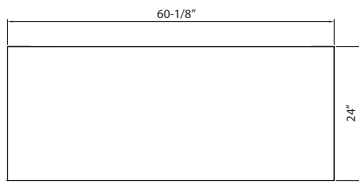


**TOP
NLBB60N**




**FRONT
NLBB48N**




**TOP
NLBB48N**




**SIDE
ALL MODELS**

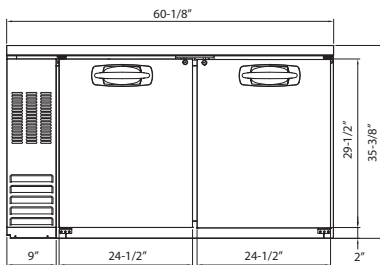

**FRONT
NLBB60N**

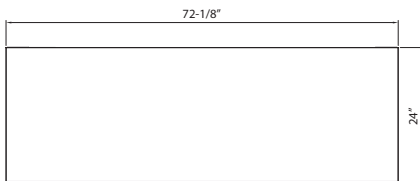

**TOP
NLBB72N**

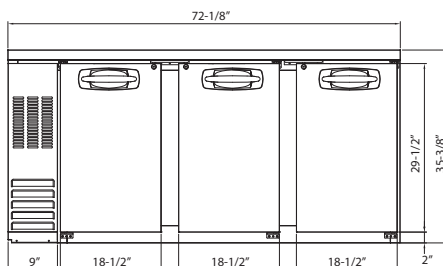

**FRONT
NLBB72N**

SPECIFICATIONS

| Models | NLBB48N | NLBB60N | NLBB72N |
|-----------------------------------|----------------|----------------|----------------|
| <i>Crated Weight (lbs) (kg)</i> | 198 (90) | 276 (125) | 320 (145) |
| <i>Crated Height (in) (cm)</i> | 43-1/4 (110) | 43-1/4 (110) | 43-1/4 (110) |
| <i>Crated Width (in) (cm)</i> | 51-3/4 (131) | 63-3/4 (162) | 75-3/4 (192) |
| <i>Crated Depth (in) (cm)</i> | 28-1/2 (72) | 28-1/2 (72) | 28-1/2 (72) |
| <i>Interior Height (in) (cm)</i> | 30-7/8 (77) | 30-7/8 (77) | 30-7/8 (77) |
| <i>Interior Width (in) (cm)</i> | 35-1/4 (90) | 47-1/4 (120) | 59-1/4 (151) |
| <i>Interior Depth (in) (cm)</i> | 18-1/4 (46) | 18-1/4 (46) | 18-1/4 (46) |
| <i>Overall Height (in) (cm)</i> | 35-3/8 (90) | 35-3/8 (90) | 35-3/8 (90) |
| <i>Overall Width (in) (cm)</i> | 48-1/8 (122) | 60-1/8 (153) | 72-1/8 (183) |
| <i>Overall Depth (in) (cm)</i> | 26 (66) | 26 (66) | 26 (66) |
| <i>Gross Cubage (CuFt) (L)</i> | 11.6 (328.5) | 15.6 (442) | 19.6 (555) |
| <i>Number of Shelves</i> | 4 | 4 | 6 |
| <i>Shelf Area (SqFt) (Sqm)</i> | 8.5 (0.8) | 11.18 (1.03) | 14.1 (1.3) |
| <i>Condensing Unit Size</i> | 3/8 HP | 3/8 HP | 3/8 HP |
| <i>Refrigerant</i> | R-134a | R-134a | R-134a |
| <i>Electrical Characteristics</i> | 115/60/1 | 115/60/1 | 115/60/1 |
| <i>Cord and Plug Furnished</i> | Yes | Yes | Yes |
| <i>NEMA Plug Configuration</i> | 5-15P | 5-15P | 5-15P |
| <i>Total Amp Draw</i> | 6.3 | 6.3 | 6.3 |
| <i>12 oz. Can Capacity</i> | 714 | 966 | 1218 |
| <i>12 oz. Bottle Capacity</i> | 336 | 468 | 588 |

Specifications subject to change without notice.



Revision Date: 03/15
©2015 NOR-LAKE, INC.
Printed in the U.S.A.
Part Number: 157999

