



ADVANTEDGE™ BOTTLE COOLERS



PROJECT:
.....
ITEM NUMBER:
.....
MODEL NUMBER:
.....

ADVANTEDGE™ BOTTLE COOLERS

SPECIFICATIONS FOR: NLBC50, NLBC69, NLBC95

- Finish: Black vinyl coated steel cabinet exterior front, sides and back with stainless steel top and sliding covers. Interior galvanized walls and floor with floor drain.
- Insulation: Foamed-in-place with 1-1/2" CFC-Free polyurethane insulation.
- Hardware: Standard with removable bottle opener cap catcher, integrated glass rail on rear top, easy glide sliding lids. Adjustable product dividers supplied. Plastic breaker strips around door openings to limit the formation of any condensation.
- Electrical: 115 volt, 60 Hz, 1 phase with cord and NEMA 5-15P plug.
- Refrigeration: Self contained forced air R-134a capillary tube refrigeration system. Automatic defrost and condensate evaporator requires no plumbing. Adjustable temperature control with temperature range of 35°F to 38°F.
- Approvals: ETL Safety and Sanitation

STANDARD FEATURES

- Adjustable temperature control
- Air cooled condensing unit
- Automatic defrost and condensate evaporator
- Black vinyl coated steel exterior
- Capillary tube system
- Durable galvanized interior
- Removable cap catcher
- Multiple evaporator fan motors
- Stainless steel top with integrated glass rail
- Stainless steel sliding lids
- Temperature Range: 35°F to 38°F
- Vinyl coated product dividers
- ETL Safety (US & Canada)
- ETL Sanitation
- Warranties: 1 Year Parts & Labor, 5 Year Compressor


OPTIONAL FEATURES*

- Heavy Duty Mobility Kit (including 3" casters with support frame)
- Additional dividers




Nor-Lake, Inc.
Registered to ISO 9001:2008
File No. 10001816


*Most options are available one week from receipt of order. Please contact us for specific questions.

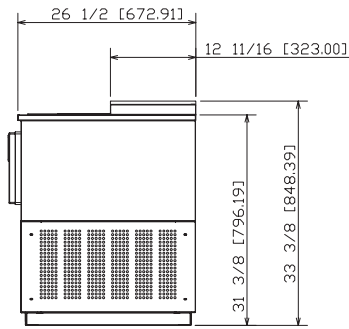


SIDE

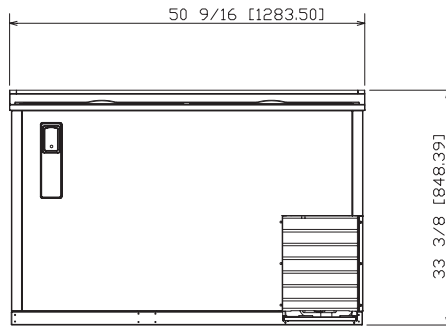


**FRONT
NLBC50**

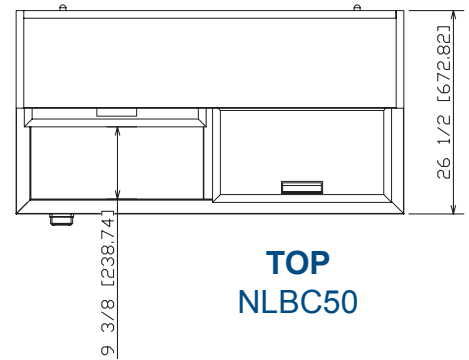


**TOP
NLBC50**

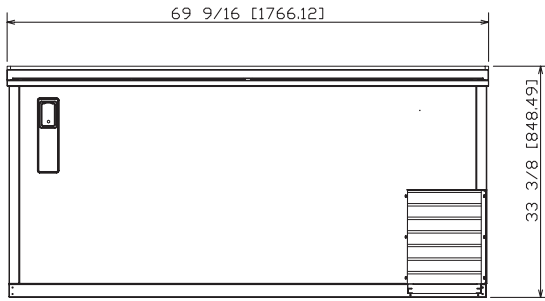


**FRONT
NLBC69**

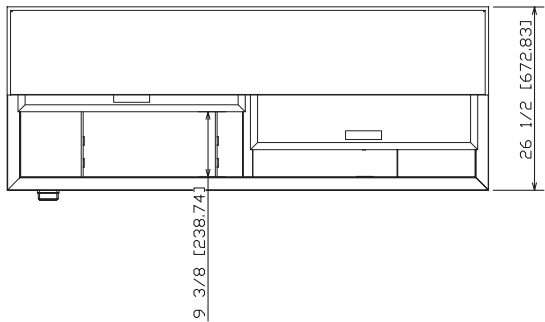

**TOP
NLBC69**

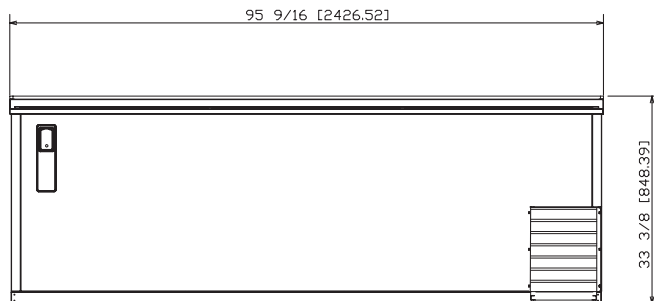

**FRONT
NLBC95**

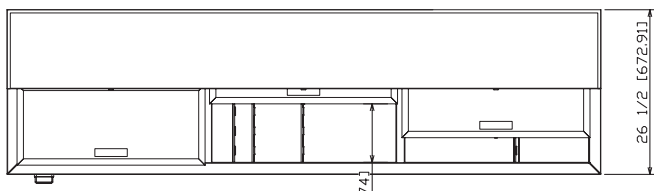

**TOP
NLBC95**

SPECIFICATIONS

<i>Model</i>	<i>NLBC50</i>	<i>NLBC69</i>	<i>NLBC95</i>
<i>Crated Height</i>	39-3/8"	39-3/8"	39-3/8"
<i>Crated Width</i>	52-1/2"	70-1/2"	96-1/2"
<i>Crated Depth</i>	30"	30"	30"
<i>Crated Weight (lbs.)</i>	240	302	385
<i>Interior Height</i>	26-3/16"	26-3/16"	26-3/16"
<i>Interior Width</i>	46-3/4"	65-3/4"	91-3/4"
<i>Interior Depth</i>	23-1/4"	23-1/4"	23-1/4"
<i>Overall Height</i>	33-3/8"	33-3/8"	33-3/8"
<i>Overall Width</i>	50-9/16"	69-9/16"	95-9/16"
<i>Overall Depth</i>	26-1/2"	26-1/2"	26-1/2"
<i>Gross Cubage (ft.³)</i>	16.5	22.7	31.5
<i>Number of Dividers</i>	3	4	7
<i>Condensing Unit Size</i>	1/4 HP	1/3 HP	1/3 HP
<i>Refrigerant</i>	R-134a	R-134a	R-134a
<i>Electrical Characteristics</i>	115/60/1	115/60/1	115/60/1
<i>Cord and Plug Furnished</i>	Yes	Yes	Yes
<i>Nema Plug Configuration</i>	5-15P	5-15P	5-15P
<i>Total Amp Draw</i>	5.9	6.2	6.3
<i>12 oz. Can Capacity</i>	704	1090	1408
<i>12 oz. Bottle Capacity</i>	286	462	672

Specifications subject to change without notice.

** Floor drain connection exits the rear of the cabinet condensing unit compartment.*



Revision: 11/12
©2012 Nor-Lake, Inc.
Printed in the USA
Part Number: 143469

