800-955-5253 715-386-2323 866-961-5253 Parts 800-388-5253 Service 715-386-6149 FAX www.norlake.com



# NOVATM HEATED CABINETS



PROJECT:

ITEM NUMBER:

MODEL NUMBER:

### SPECIFICATIONS FOR: NW211 & NW482

Exterior front, sides and doors are stainless steel. The exterior top, bottom and back are Exterior finish:

galvanized steel. All exterior joints and seams fold in without lap joints. No exposed raw

edges.

Interior finish: Interior liner and interior door panel are stainless steel.

Insulation: The complete cabinet and door(s) are foamed-in-place with polyurethane insulation.

Heavy duty, pivot hinges; centered key locks; Horizontal work flow handles; self adjusting Hardware:

magnetic gaskets; 4" dia. casters; and nickel chrome shelves.

All models are standard with an interior incandescent light activated by a switch for the door. Electrical:

Instrumentation: Digital LED thermometer reading degrees F.

Electrically operated 1500 watt heating system for 1 door model and a 3000 watt heating Heating system:

system for 2 door model is controlled by a thermostat mounted in front of the cabinet. Heating element is located in the interior ducting. Forced air distribution maintains desired uniform temperature throughout the cabinet. Operating temperature is adjustable from 120°F to a

maximum of 200°F.

UL listed Approvals:

C-UL listed \*\*

UL Sanitation listed\*\*

#### STANDARD FEATURES

- Casters
- Digital thermometer
- Ducted air distribution
- Field reversible door
- Horizontal work flow handles
- Incandescent interior light
- Key locks
- Magnetic gasketing
- Nickel chrome shelves

- Operating temperature 120°F to 200°F
- Polyurethane insulation
- Stainless steel exterior
- Stainless steel interior
- Stocked for same day shipment
- UL, C-UL & UL Sanitation listed\*\*
- Warranties: 12 months parts and labor

#### **OPTIONAL FEATURES**

- Alarm systems
- Bun pans
- Half solid doors
- Legs in lieu of casters Patterned stainless steel,
- dent resistant doors
- Shelves (half or full door)
- Stainless steel pan slides




Nor-Lake, Inc. Registered to ISO 9001:2008 File No. 10001816


\* Most options are available two weeks from receipt of order. Please contact us for specific questions.

\*\* C-UL is Underwriters Laboratories Safety Certification Mark which indicates that UL has tested the equipment to applicable CSA Standards.


\*\* UL Sanitation is Underwriters Laboratories Sanitation Mark which indicates that UL has tested the equipment to applicable NSF Standards.








## **SPECIFICATIONS**



32"	
B C	81 1/2"
	76 3/4"
	53 1/2
SIDE	

# NW211

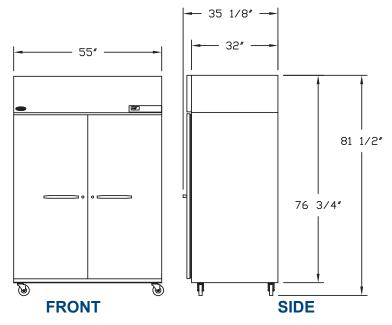

Model	NW211	NW482
Crated Height	81"	81"
Crated Width	31"	59"
Crated Depth	38"	38"
Crated Weight (lbs)	300	545
Interior Height	59"	59"
Interior Width	23-1/2"	51"
Interior Depth	28"	28"
Overall Height	81-1/2"	81-1/2"
Overall Width	27-1/2"	55"
Overall Depth	35-1/8"	35-1/8"
Gross Cubage (ft.3)	22.5	48.8
Number of Shelves	3	6
Shelf Area (sq.ft.)	16.6	36.1
Number of Casters	4	4
Number of Legs (Opt.)	4	4
Heater Wattage	1500	3000
Electrical Characteristics	115/60/1	208-230/60/1
Cord & Plug Furnished	Yes	Yes
Maximum Fuse Size	20	20
NEMA Plug Configuration	5-20P	L14-20P
Total Amp Draw	12.5	13.7

<sup>\*</sup> The overall heights shown in the table and drawings are with casters. With 6" legs the overall height is 82-3/4".

Specifications subject to change without notice



Revision Date: 09/11 © 2011 NOR-LAKE, INC. Printed in the U.S.A. Part Number: 101386



