

NOVA™ ROLL-IN REFRIGERATORS



SPECIFICATIONS FOR: WR331, WR722

- **Exterior Finish:** Exterior front, sides and doors are stainless steel. The exterior top, bottom and back are galvanized steel. All exterior joints and seams fold in without lap joints. No exposed raw edges.
- **Interior Finish:** Interior liner and interior door pan are stainless steel. The interior floor is 22 gauge stainless steel.
- **Insulation:** The complete cabinet and door(s) are foamed in place with polyurethane insulation.
- **Hardware:** Heavy duty, pivot hinges; centered key locks; horizontal work flow handle; self adjusting magnetic gaskets. Each unit comes with interior bumper/cart guides made of stainless steel.
- **Electrical:** All models are standard with complete perimeter, anti-condensate door opening heater wires and an interior LED light activated by switches for each door.
- **Instrumentation:** Microprocessor with digital display and Hi/Lo audio/visual alarm.
- **Refrigeration:** Complete top mounted refrigeration system, not taking space from the food zone. A copper tube, aluminum fin evaporator. The condensate is collected and automatically evaporated from a hot gas evaporator pan increasing the efficiency of the system. Refrigerant flow is controlled by a capillary tube system. Operating temperature: 38°F. R-134a Refrigerant.
- **Approvals:** NSF & UL Safety and Sanitation listed**

PROJECT:

ITEM NUMBER:

MODEL NUMBER:

1 & 2 DOOR ROLL-INS

STANDARD FEATURES

- Air cooled condensing unit
- Automatic condensate evaporation
- Automatic defrost
- Cart guides
- Digital thermometer
- Door opening heaters
- Capillary tube system
- Horizontal work flow handle
- Magnetic gasketing
- Operating temperature: 38°F
- Recessed interior light
- Stainless steel interior and exterior
- Stocked for same day shipment
- NSF & UL Safety and Sanitation listed
- Warranties: 12 months parts & labor, 5 year compressor

OPTIONAL FEATURES*


- Alarm systems
- Temperature recorder
- Thermal expansion valve




Nor-Lake, Inc.
 Registered to ISO 9001:2008
 File No. 10001816

* Most options are available two weeks from receipt of order. Please contact us for specific questions.


** UL Sanitation is Underwriters Laboratories Safety Certification Mark, which indicates that UL has tested the equipment to applicable NSF Standards.

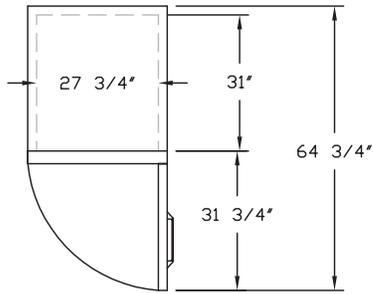

**TOP
WR331**

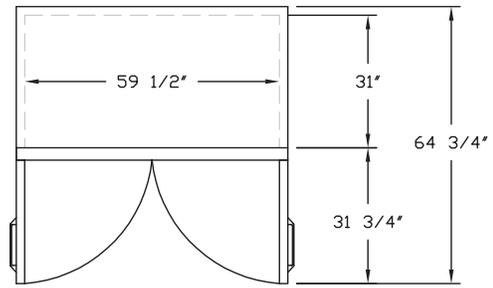


**TOP
WR722**

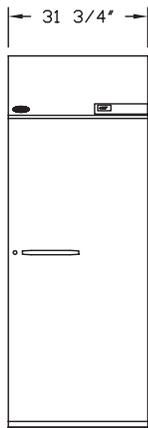

FRONT

WR331

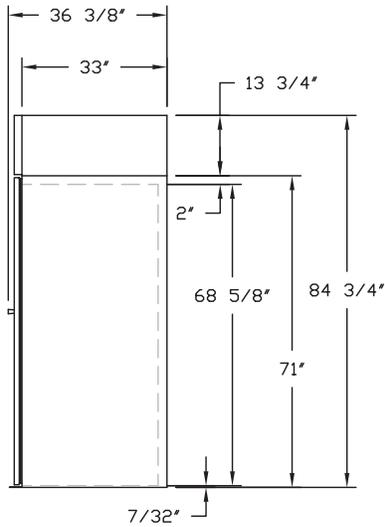


SIDE

SPECIFICATIONS


<i>Models</i>	<i>WR331</i>	<i>WR722</i>
<i>Crated Height</i>	88-1/2"	88-1/2"
<i>Crated Width</i>	38-1/4"	64-1/2"
<i>Crated Depth</i>	40-3/8"	40-3/8"
<i>Crated Weight (lbs)</i>	402	605
<i>Interior Height</i>	68-5/8"	68-5/8"
<i>Interior Width</i>	27-3/4"	59-1/2"
<i>Interior Depth</i>	31"	31"
<i>Overall Height</i>	84-3/4"	84-3/4"
<i>Overall Width</i>	31-3/4"	63-1/2"
<i>Overall Depth</i>	36-3/8"	36-3/8"
<i>Gross Cubage (ft.3)</i>	34.2	72.5
<i>Ramp Incline (deg.)</i>	7°	7°
<i>Compressor Size</i>	1/3	1/2
<i>Electrical Characteristics</i>	115/60/1	115/60/1
<i>Cord & Plug Furnished</i>	Yes	Yes
<i>Nema Plug Configuration</i>	5-15P	5-15P
<i>Total Amp Draw</i>	7.7	11.8

Specifications subject to change without notice.

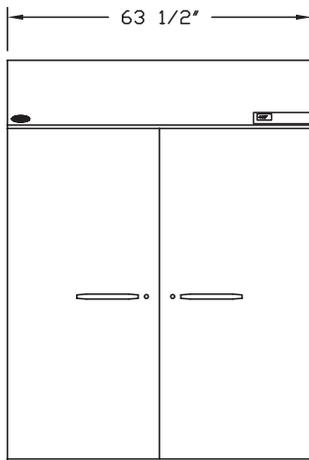

FRONT

WR722

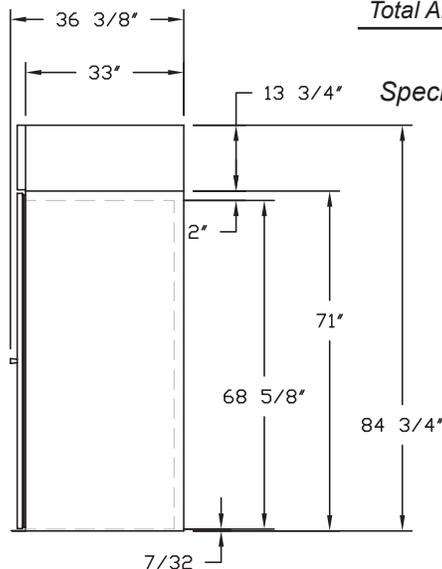

SIDE



Revision Date: 11/12
 © 2012 NOR-LAKE, INC.
 Printed in the U.S.A.
 Part Number: 040349

