

Project _____

Item _____

Quantity _____

PRO-16 Floor Model Proofer



SIZE:

PRO-16 - 69-1/8" High, 24-1/4" Wide, 34-1/2" Deep
1756 mm High, 616 mm Wide, 876 mm Deep

NU-VU's **PRO-16** Floor model proofer has a stainless steel exterior and tempered glass doors for full view of your product. A manual fill water pan located at the bottom of the unit provides the humidity, while the fan provides uniform distribution of heat and humidity.

The PRO-16 has a capacity of 16 full size pans and 32 half-size pans.

CONSTRUCTION:

- Welded stainless steel
- Fully insulated
- Control panel accessible through front of unit
- Heating elements accessible inside of cabinet

CONTROLS:

- Electromechanical controls
- Indicator light for thermostat
- Separate heat and humidity controls


STANDARD FEATURES:

- Stainless steel exterior
- Aluminum interior
- Heavy duty casters
- Full view glass door
- Silicone rubber door gaskets
- Manual fill water pan

OPTIONAL FEATURES:


- Warmer
- Set of 6" legs

NU-VU® PRO-16 Floor Model Proofer

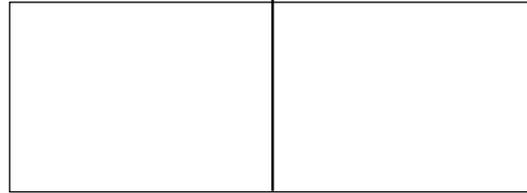

Approval / Stamp

PRO-16 Floor Model Proofer

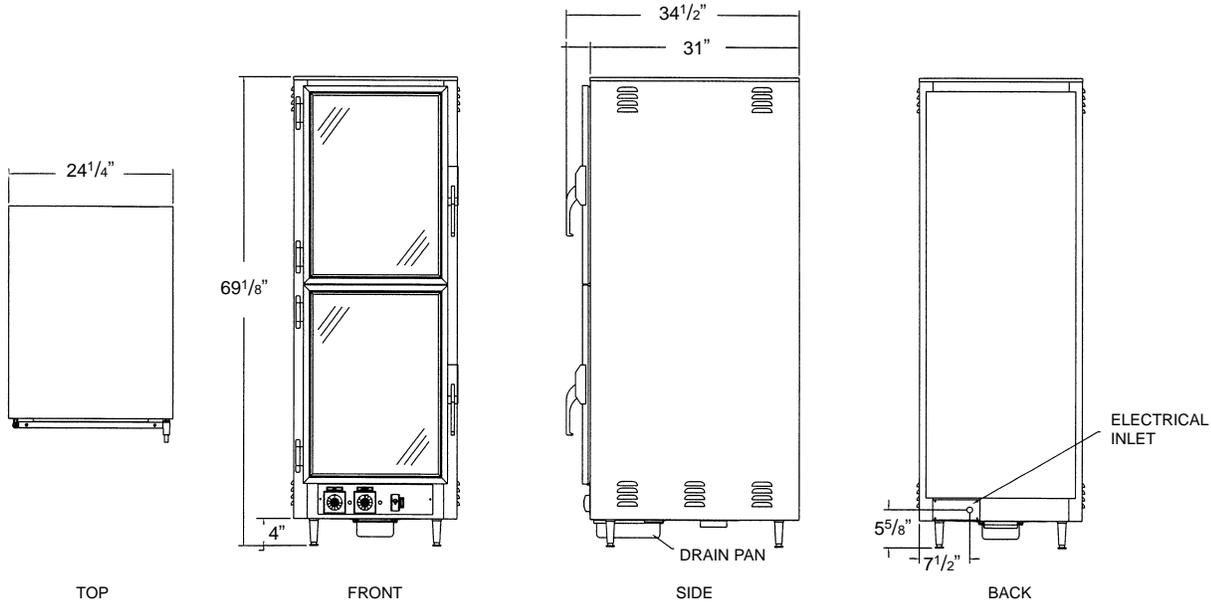

NU-VU® PRO-16 Floor Model Proofer

SPECIFICATIONS:

ELECTRICAL:

SERVICE CONNECTIONS:

- Unit is shipped from factory to be hard wired on site. Single phase uses four-wire system.
- 120/208 or 120/240-Volt single phase is standard. Please specify at time of order.

ELECTRICAL:

Amp Draw	120/208/1	120/208/3	120/240/1	120/240/3
L1	19	n/a	19	n/a
L2	n/a	n/a	n/a	n/a

INSTALLATION:

Allow four inches on each side and back of unit for ventilation of oven.

CAPACITY:

	18"x26" Sheet Pans	13"x18" Sheet Pans	Spacing
Proofer	16	32	3-5/16"

DIMENSIONS:

	Height	Width	Depth
Exterior	69-1/8"	24-1/4"	34-1/2"
Interior	57-3/8"	18-3/8"	28-7/8"

DOOR SWING: Proofer - 23-7/8" (606 mm)

PACKING SIZE:

87" High, 40" Wide, 33" Deep
(2210 mm High, 1016 mm Wide, 838 mm Deep)

SHIPPING WEIGHT:

350 Pounds (159 Kg), FOB Menominee, MI 49858