

**QBT-3/9** Oven/Proofer 3 Pans Oven Capacity 9 Pans Proofer Capacity Touch Screen Programmable Control



DESCRIPTION

The QBT-3/9 NU-VU Oven/Proofer features our best-in-class airflow system in the oven. This technology drives faster cook times and perfect heat distribution top to bottom, side to side and front to back. You will never need to turn pans, and that will save labor costs. You can produce to perfection all types of bakery product, including breads, rolls, pies, cinnamon buns, croissants and more.

This unit is designed for applications where on-premise baking is needed.

## PAN CAPACITY GUIDE

Sheet Pans	13″x18″	18″x26″	Spacing		
Oven	6	3	4 1/2"		
Proofer	18	9	3 1/2″		

Project

Item No.

Quantity

# ELECTRIC

□ 1 PH - 208V - 32 A - 6.7 kW - 60 Hz - 2 wires + Ground
□ 1 PH - 240V - 28 A - 6.7 kW - 60 Hz - 2 wires + Ground
□ 3 PH - 208V - 21 A - 6.7 kW - 60 Hz - 3 wires + Ground
□ 3 PH - 240V - 18 A - 6.7 kW - 60 Hz - 3 wires + Ground
Other voltages available. Please contact factory for more information.

# **STANDARD FEATURES**


- Sleek new look
- Dual pane cool-to-the-touch oven door
- Touch screen programmable control
- Wi-Fi capabilities
- Best-in-class airflow system
- Stainless steel construction
- Heating elements easily accessible
- Fully insulated
- Magnetic handles
- AUTOMIST<sup>®</sup> Proofer
- Removable drip trough
- 12 Volt Halogen lights
- Proofer components on back wall enables easy cleaning of proofer bottom with nothing exposed to water
- Recessed water filter with easy to change filter
- Rack cutout toward front allows for removing pans without damaging product

## STANDARD PRODUCT WARRANTY

2 year parts 1 year labor limited warranty



5600 13th Street, Menominee, MI 49858 USA · Phone: 1-800-338-9886 · Fax: (906) 863-5889

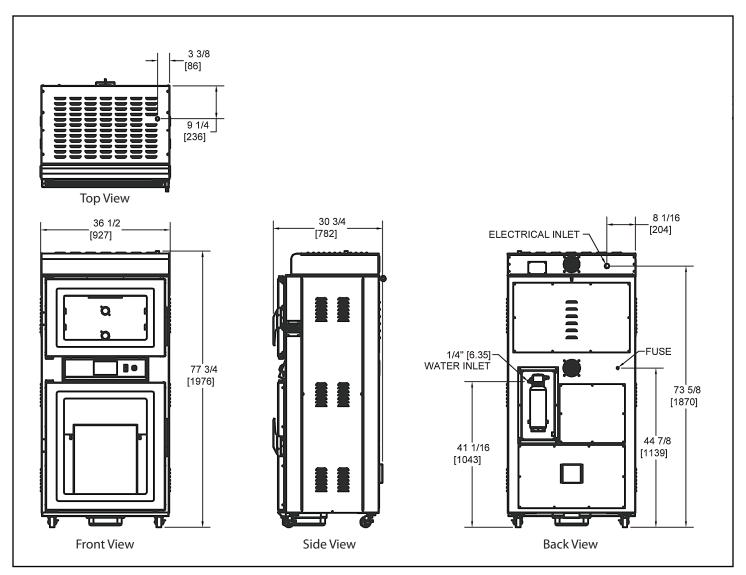

#### **SPECIFICATIONS**

Model	Overall Dimensions		Oven Interior Dimensions		Proofer		Clearance		Water	Shipping	Freight				
	W	D	н	W	D	H	W	D	н	Side	Тор	Bottom	Inlet	Weight	Class
QBT-3/9	38 1/2″ (978)	30 3/4″ (781)	77 3/4″ (1 974)	26″ (660)	18 1/2″ (470)	14 1/2″ (711)	26″ (660)	18 1/2″ (470)	33 3/8″ (848)	4″ (102)	4″ (102)	4″ (102)	1/4″	630 (286)	85

Due to continuous improvements, specifications and designs are subject to change without notice.