



RA-5T

TABLETOP CONVECTION OVEN WITH PROGRAMMABLE CONTROLS

The RA-5T Tabletop Oven features our exclusive Moving Air system. Heat is distributed evenly throughout the oven cavity by the fan located in the top of the oven which blows the air down the inside walls of the cavity and up and out through the holes at each shelf. This gives your product an even bake, top to bottom, side to side, and front to back and requires less energy per pan. The three speed fan allows baking and cooking all types of products. The standard RA-5T offers you precise baking and cooking of 5 full size sheet pans with generous 4" spacing. If you produce taller product, you can specify 4 shelves at 5" spacing. The RA-5T is constructed of stainless steel. User friendly programmable controls provide cooking parameters with just the touch of a button. The slam-cam handle and cool-to-touch dual pane door provide safe and easy usage. A pass-thru option is available, and allows back of the house loading, with front of the house unloading. Being just 30" wide and the ability to be stacked, it is the perfect convection oven to add where space may be limited.



Shown with optional pass-thru

SIZE

41-3/4" H, 30"W, 37-13/16" D
(1060 mm, 762 mm, 960 mm)

STANDARD FEATURES

- V-Air® technology
- Stainless steel construction
- Stainless steel legs (6")
- Cool to touch, dual pane, full view tempered glass door
- Silicone rubber gasket on door
- Slam-Cam handle
- 3 speed fan
- Tool-less cleaning of door glass
- Field reversible door
- Cook'n Hold
- 2 year parts 1 year labor limited warranty

CONSTRUCTION

- Welded stainless steel
- Fully insulated
- Control panel accessible through front and top of unit
- Heating elements accessible inside of cabinet


CONTROLS

- Programmable controls
- 3 speed fan
- Microswitch fanmotor cut-off

OPTIONS

- Internal Steam
- Pass-Thru
- Cart with Panslides (98-0350-PS)
Cart without Panslides (98-0350-NP)
- Stand with Panslides (98-0351-PS)
Stand without Panslides (98-0351-NP)
- Stacking Kit

Experience our top-of-the-line ovens today!

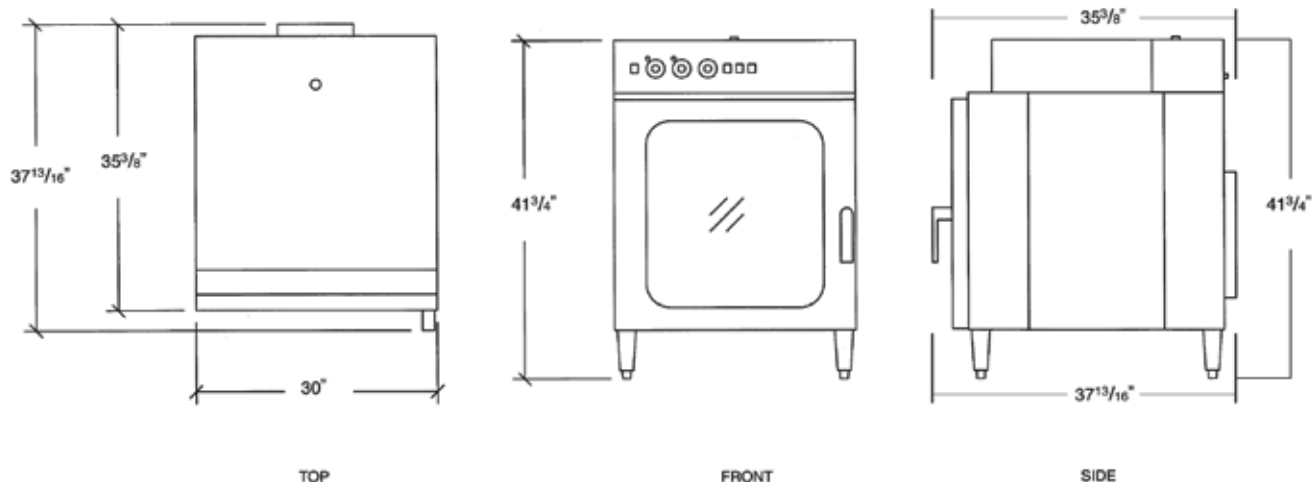

SPECIFICATIONS:

ELECTRICAL:

208 or 240 Volt single or three phase is standard.
(Specify at time of order.)

SERVICE CONNECTIONS:

- Unit is shipped from factory to be hard wired on site.
Single phase uses three wire system. Three phase uses four wire system.

ELECTRICAL:

Amp Draw	208/1	208/3	240/1	240/3
	37	30	32	26

WATER:

A 1/4" waterline is required if a steam option is selected.
A water conditioning system should be used to minimize mineral build-up.

LISTINGS:

The RA-5T has ETL Sanitation & C-ETL-US listings.

INSTALLATION:

Allow four inches on each side and back of unit for ventilation of oven.

CAPACITY:

	18"x26" Sheet Pans	13"x18" Sheet Pans	Spacing
Oven	5	10	4"

DIMENSIONS:

	Height	Width	Depth
Exterior	41-3/4"	30"	37-13/16"
Interior	22"	18-3/4"	29-3/4"

DOOR SWING: Oven - 30-1/2" (775 mm)

PACKING SIZE:

48" High, 34" Wide, 46" Deep
(1219 mm High, 864 mm Wide, 1168 mm Deep)

SHIPPING WEIGHT:

400 Pounds (159 Kg), FOB Menominee, MI 49858



Specifications and design are subject to change without notice.



5600 13th Street • Menominee, MI 49858 USA
 Phone: 906-863-4401 E-mail: sales@nu-vu.com
 Toll Free: 1-800-338-9886 www.doyon.qc.ca
 Fax: 906-863-5889 www.nu-vu.com