NE-2157

2100 Watt* Commercial Microwave Oven

Technical Specifications

Power source: 208/230-240V, 60Hz, Single phase

Receptacle required: NEMA 6-20R

Frequency: 2,450MHz

Required power: 208: (16.6A); 230-240; (15.3A)

Output*: 2100 Watts

Outer dimensions: 16 %" w x 20" d x 13 $\frac{3}{6}$ " h

Cavity dimensions: 13"w x 12"d x 6 %"h

Net weight: 68 lbs .

Shipping weight: 73 lbs.

Shipping box size: 19 15 %" w x 24 16 %" h, 4.7 ft 3

Timer: Maximum programmable times for each stage of cooking — Hi and Med. power=15 minutes

— Defrost=30 minutes




To specify a Panasonic Commercial Microwave Oven:

The NE-2157 Commercial Microwave Oven meets or exceeds all safety performance and sanitation standards set for commercial food service microwave ovens by: UL, HHS, FCC and NSF.

Plus, oven shall have output power 2100 Watts*, top and bottom energy feed, Grab & Go door handle, patented safety door seal system, programmable memory pads, 3-stage cooking, 3 power levels (HI, MED., DEF.), digital display w/countdown, programmable lock, self-diagnostics, oven cycle counter, stackable, video training and Chef/Test Kitchen technical support.

* I.E.C. 705-88 Test Procedure. Specifications subject to change without notice.

Receptacle Required

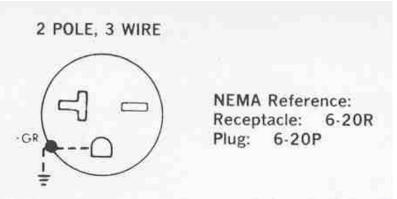


ADA Compliance


§4.28.2 ((CFR) – 28CFR Part 36) "For Alarms".


§4.27 "For controls and operating mechanisms".











Panasonic ideas for life

Panasonic Appliance & Commercial Group

Division of Matsushita Electric Corporation of America Executive Offices:

One Panasonic Way, Panazip 4A-1, Secaucus, NJ 07094 Toll Free: 1-888-350-9590 www.panasonic.com/cmo