



# REMOTE NARROW-DOOR BACK BAR REFRIGERATOR

## 2, 3 & 4 DOOR



BBRN40 shown



JOB	
AREA	
ITEM NO.	
MODEL NO.	

<b>BBRN40</b>	2-Door Model
<b>BBRN60</b>	3-Door Model
<b>BBRN80</b>	4-Door Model



MODEL NUMBERS		BBRN40	BBRN60	BBRN80
NUMBER OF DOORS		2	3	4
EXTERIOR CABINET DIMENSIONS	Length - in. (mm)	40" (1016mm)	60" (1524mm)	80" (2032mm)
	Depth - in. (mm)	24.75" (629mm)	24.75" (629mm)	24.75" (629mm)
	Height - in. (mm)	34.565" (878mm)	34.565" (878mm)	34.565" (878mm)
INTERIOR CABINET DIMENSIONS	Length - in. (mm)	36.4375" (926mm)	56.4375" (1434mm)	76.4375" (1942mm)
	Depth - in. (mm)	18.75" (476mm)	18.75" (476mm)	18.75" (476mm)
	Height - in. (mm)	28.5" (724mm)	28.5" (724mm)	28.5" (724mm)
INTERNAL VOLUME Net. Cu. Ft. (Litres)		12.0 (340lt)	19.0 (538lt)	26.8 (759lt)
SHIPPING WEIGHT Lbs. (kg.)		261# (118kg)	342# (155kg)	444# (201kg)
ELECTRICAL SPECIFICATIONS	Electrical Supply	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph	120 VAC/60 Hz/1 Ph
	Running Load Amps	1.6	2	2.5
	Electrical Connection	Hard Wired	Hard Wired	Cord Connected
	Defrost Initiation	Automatic	Automatic	Automatic
	Defrost Type	Off Cycle	Off Cycle	Off Cycle
	Lighting Type	LED	LED	LED
REFRIGERATION SPECIFICATIONS	Horsepower	1/4	1/3	1/3
	Expansion Device	TXV	TXV	TXV
	Evaporator Capacity-Remotes	1900 Btu/Hr @ 20° F Evaporator	2300 Btu/Hr @ 20° F Evaporator	2300 Btu/Hr @ 20° F Evaporator
	Remote Refrigerant Options	R134a & R22 & R404a	R134a & R22 & R404a	R134a & R22 & R404a
PLUMBING	Floor Drain Included	Yes	Yes	Yes
	Evaporator Condensate	Field Plumbed	Field Plumbed	Field Plumbed

# REMOTE NARROW-DOOR BACK BAR REFRIGERATOR 2, 3 & 4 DOOR

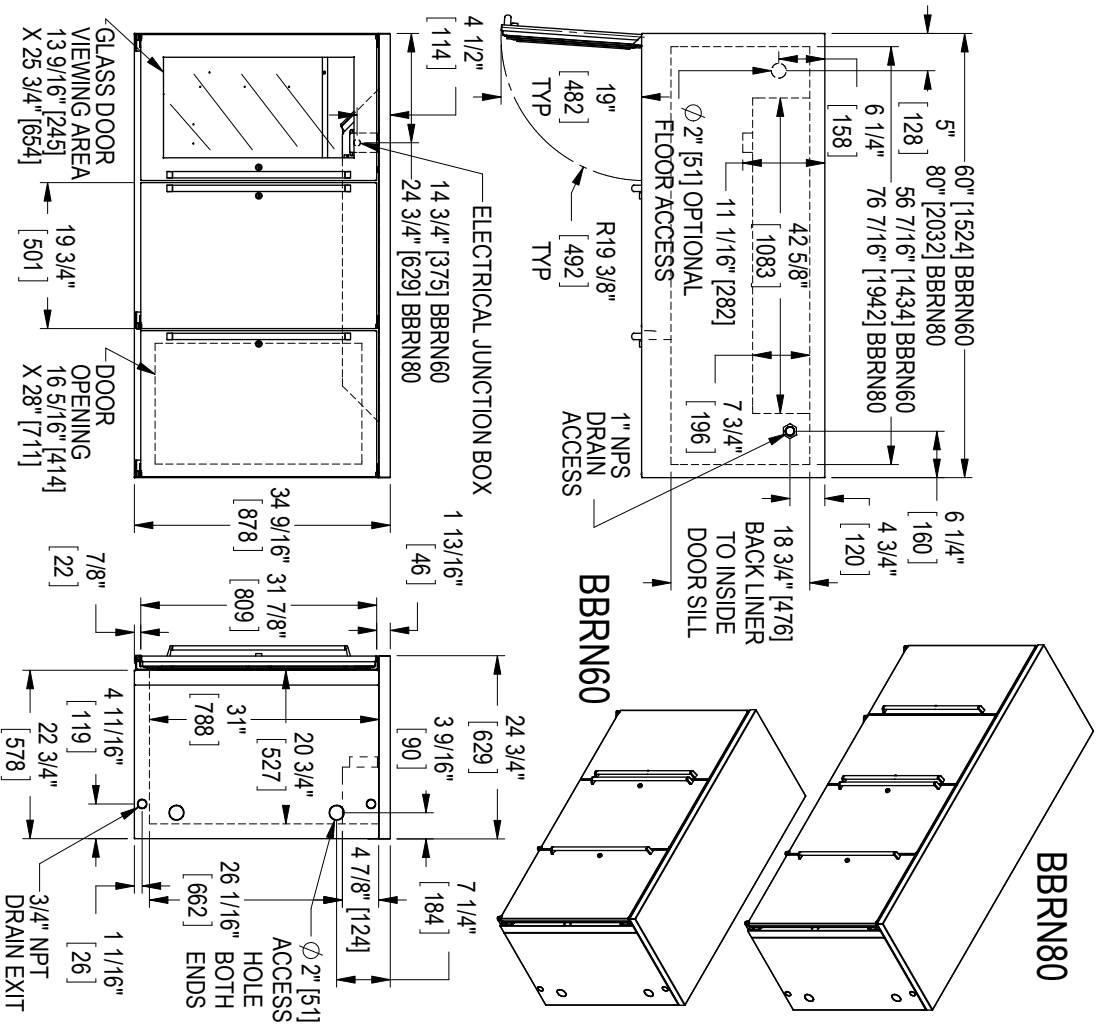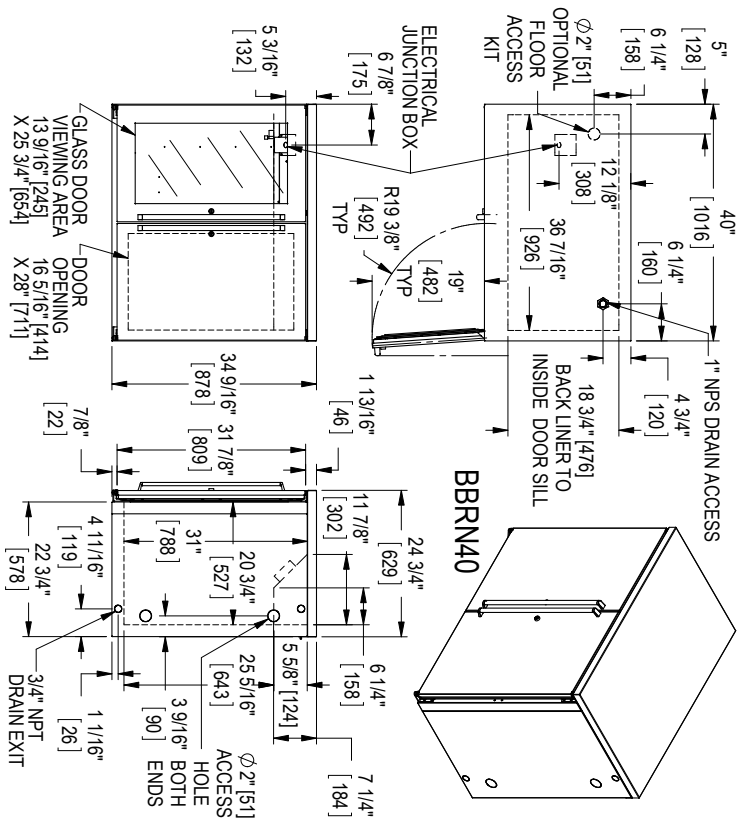

8300 West Good Hope Road, Milwaukee, WI 53223  
 (800) 558-5592 • perlick.com