

# SINGLE DOOR BEVERAGE CENTER

## 24" ADA-COMPLIANT SERIES

### Perlick Features

- 32" height (including leveling legs) to meet ADA-compliant requirements
- Best in Class 700 Btu commercial-grade compressor
- Front-vented RAPIDcool forced-air refrigeration system
- Commercial-grade stainless steel interior
- Industry Exclusive black vinyl-coated, full-extension pull-out shelves
- Stainless steel ball bearing glides provide smooth shelf movement
- Convertible door design allows for all doors to be converted to wood overlay from stainless steel (*note: wood overlay done by customers millworker*)
- Fully-integrated depth allows for flush fit with surrounding cabinetry
- Multiple door styles and finishes available
- Stores up to 16 wine bottles (750 ml.) on wine shelves plus storage below for cans and bottles
- Also available in ADA-Compliant Series: Refrigerator, Refrigerator Drawers, Freezer, Freezer Drawers and Wine Reserve

MODELS	
	HA24BB-1L
	HA24BB-1R
	HA24BB-2L
	HA24BB-2R
	HA24BB-3L
	HA24BB-3R
	HA24BB-4L
	HA24BB-4R



Intertek



HA24BB-1R



HA24BB-3R

Form No. AD03  
Rev. 08.13.2012



8300 West Good Hope Road • Milwaukee, WI 53223 • Phone 414.353.7060 • Fax 414.353.7069  
Toll Free 800.558.5592 • E-mail perlick@perlick.com • Web www.perlick.com

# SINGLE DOOR BEVERAGE CENTER

24" ADA-COMPLIANT SERIES



Job \_\_\_\_\_



Area \_\_\_\_\_

Item No. \_\_\_\_\_

Model No. \_\_\_\_\_

<b>MODEL NO.</b>	<b>HA24BB</b>	
<b>CABINET DIMENSIONS</b>	Length Ins. (mm)	23-7/8" (606)
	Depth Ins. (mm)	24" (610)
	Height Ins. (mm)	32" (813)
<b>SHIP WEIGHT LBS. (KG)</b>	195 (88)	
<b>CAPACITY CU. FT. (L.)</b>	4.8 (136)	
<b>SHELVING</b>	2 black vinyl-coated full-extension wine shelves that hold 8 wine bottles each (750 ml.) (adjustable) and 1 black vinyl-coated full-extension shelf (adjustable)	
<b>CABINET CONSTRUCTION (INT.)</b>	<b>Interior</b> Stainless Steel	
<b>CABINET CONSTRUCTION (EXT.)</b>	<b>Exterior Sides, Exterior Top</b> Black Vinyl <b>Exterior Back</b> Galvanized <b>Door Exterior</b> Customer Choice (see below under 'Customer Options')	
<b>CABINET INSULATION</b>	Polyurethane-Ecomate. <b>Wall Thickness-2"</b> <b>Door, Drawer Thickness-2"</b> (solid stainless steel only)	
<b>DOORS, HINGING &amp; HARDWARE</b>	<b>Number of Doors</b> 1 <b>Opening Style</b> Hinged (Left or Right) <b>Door Style</b> Solid or Glass <b>Door Swing</b> Clearance 25" (635) <b>Locks</b> Available (factory installed)	
<b>CONDENSING UNIT</b>	<b>H.P.</b> 1/6 <b>Condenser Access</b> Front	
<b>REFRIGERATION</b>	<b>Refrigerant</b> R134a <b>Expansion Device</b> Capillary Tube Type	
<b>PLUMBING</b>	None required. Moisture drains to self evaporating condensate pan	
<b>ELECTRICAL</b>	<b>Electrical Supply</b> 115V/60 Hz/1 Phase <b>Running Load Amps</b> 2.3 <b>Cord Connection</b> Cord Connected (3-prong 6' NEMA 5-15P) <b>Thermostat</b> Electro-Mechanical <b>Lighting Type</b> Incandescent	
<b>TEMPERATURE SETTINGS F°(C°)</b>	<b>Factory Temp. Setting-Beverage Center</b> 42°(5.6°) <b>Temp. Range-Beverage Center</b> 30°- 48°(-1.1°- 8.9°)	
<b>CUSTOMER OPTIONS</b>	<b>Door Finishes</b> Solid Stainless Steel Door (-1), Solid Wood Overlay Door (-2), Stainless Steel Glass Door (-3), Wood Overlay Glass Door (-4)	

**NOTE:** This equipment is intended for the storage and display of non-potentially hazardous bottled or canned products only!

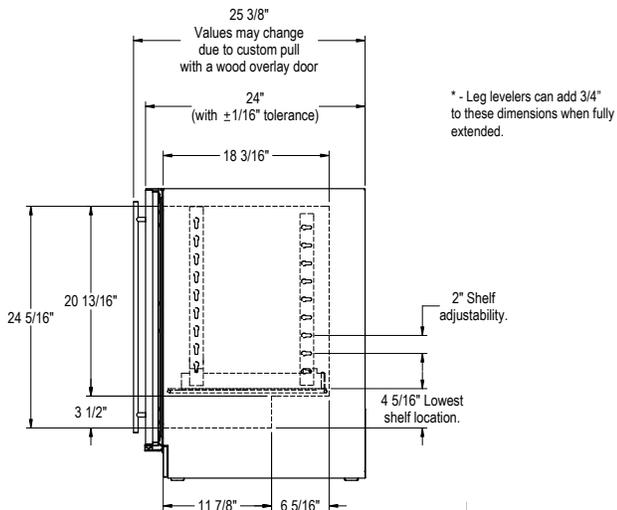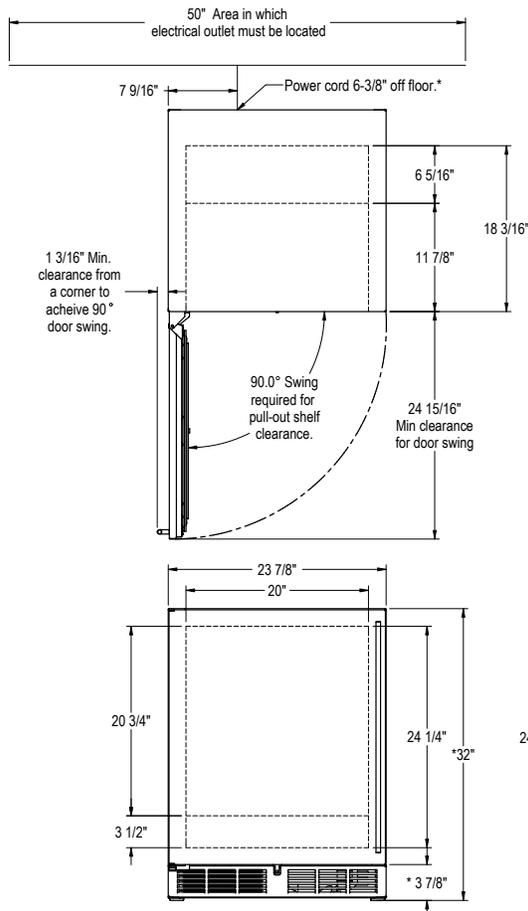

Perlick is committed to continuous improvement. Therefore, we reserve the right to change specifications without prior notice.

Form No. AD03  
Rev. 08.13.2012

